


GUIDE

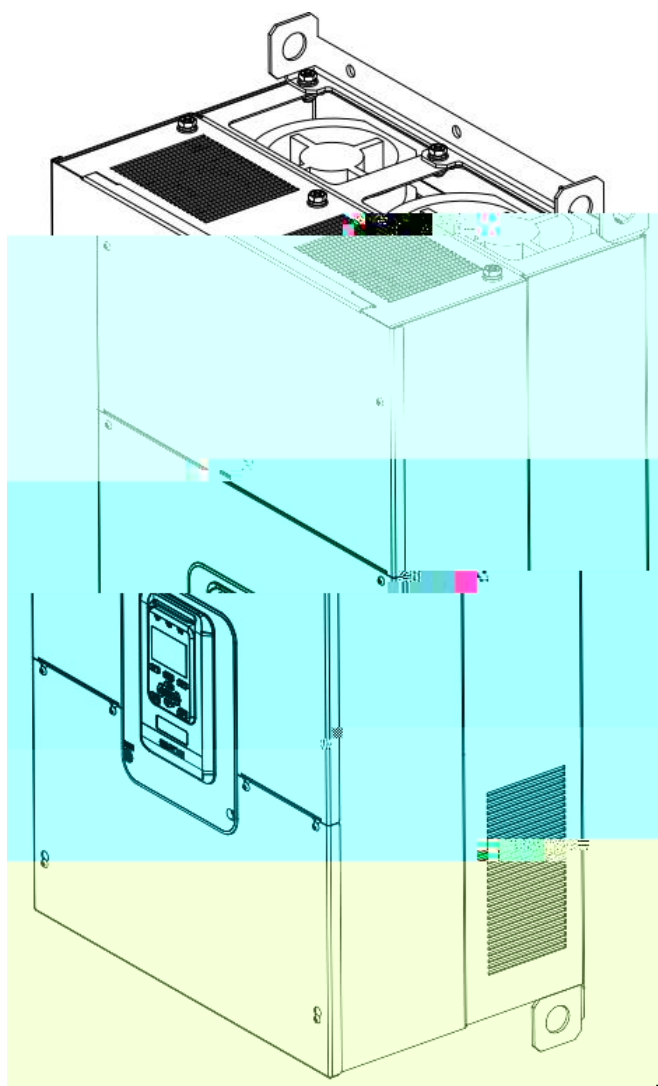




HF620

1.			
1.1			1
1.2			3
1.3			3
2.			
2.1			4
2.2			4
2.3			5
2.4			6
2.5			12
2.6			17
2.7			19
2.8			19
2.9			20
3.			
3.1			22
3.2			23
3.3			34
3.4			35
3.5	PGC2		36
3.6	PGD2		39
4.			
4.1			43
4.2			44
4.3			47
4.4			50
4.5			51
4.6			52
4.7			53
4.8			54
4.9			55
4.10	EMC		56
5.			
5.1			59
5.2			60
5.3			60
6.			
6.1			73
6.2			74
7.			
7.1	P0		79
7.2	P2		79
7.3	P3		79
7.4	P4		82
7.5	P5		84
7.6	P6		86
7.7	P7		88
7.8	1 P8		91

7.9	2		P9	94
7.10	3		P10	97
7.11	4		P11	100
7.12	1		P12	103
7.13	2		P13	105
7.14	3		P14	107
7.15	4		P15	109
7.16	1	V/F	P16	111
7.17	2	V/F	P17	115
7.18	3	V/F	P18	118
7.19	4	V/F	P19	121
7.20	1		P20	124
7.21	2		P21	128
7.22	3		P22	132
7.23	4		P23	136
7.24	MODBUS		P32	140
7.25			P33	141
8.				
8.1				151
8.2				151
8.3				152
8.4				153
8.5				153
8.6				154
8.7				157
8.8				160
8.9		V/F		165
8.10				168
8.11				173
9.				
9.1				174
9.2				175
9.3				179
10.				
10.1				180
10.2				181
10.3				181
10.4				182
10.5				182

1.

1.1

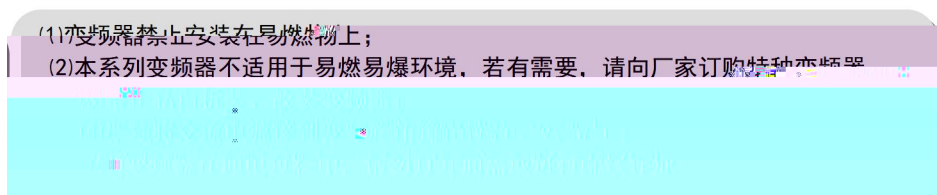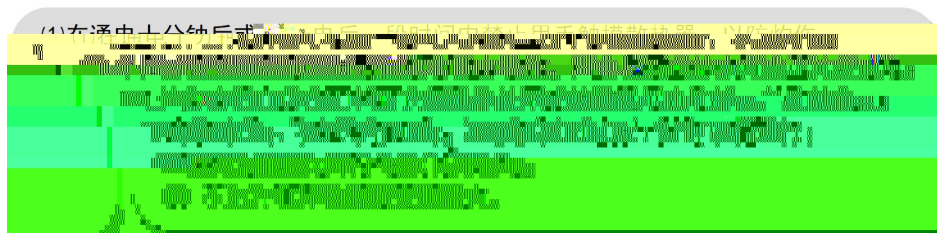

1

RCD

RCM

RCD

RCM

B

RCD

RCD

RCD

RCD

2

500V

5MΩ

3

1.2

(1)

(2)

(3)

(4)

LVD	2014/35/EU	EN 61800-5-1
EMC	2014/30/EU	EN 61800-3

1.3

2.


2.1



必须正确选型。选型不正确可能会导致由...
...
...

- 1.
- 2.
- 3.
- 4.

2.2

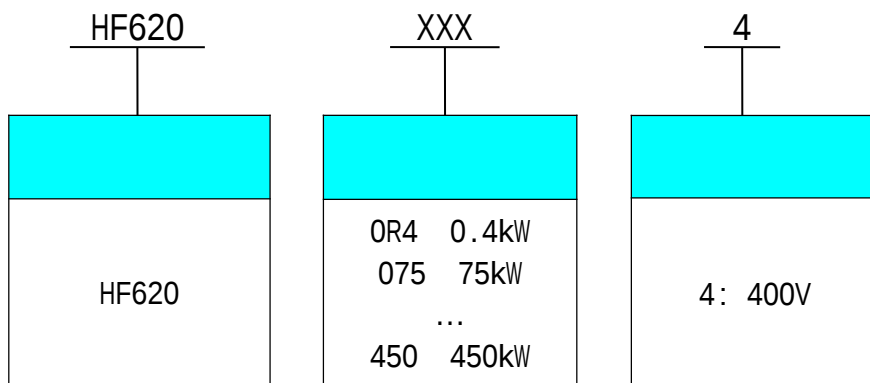


2-1

HF620

2-2

250kW

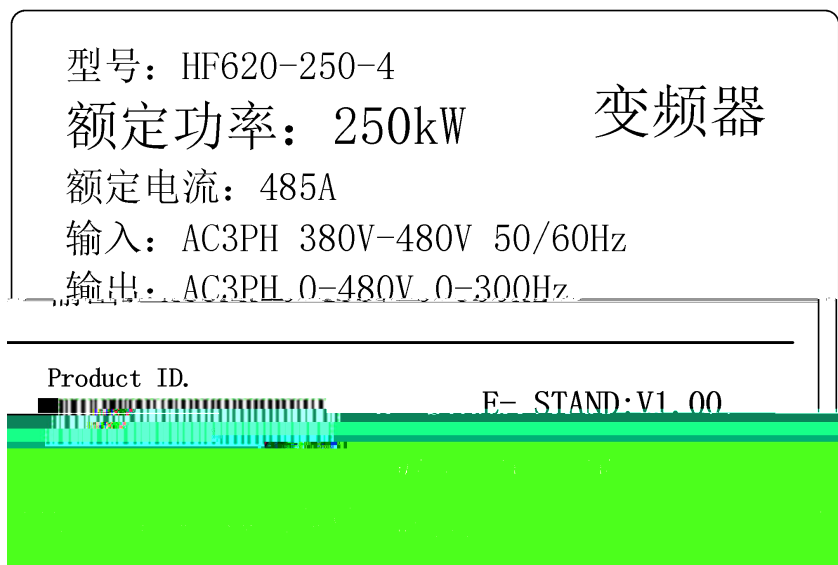

2-2

HF620-250-4 HF620 250kW 400V

AC

3PH

380V-480V 50/60Hz

0-480V 0-300Hz

2.3

2-3 HF620

						(kg)
	[A]	[kW]	[A]	[kW]		
HF620-0R4-4	1.8	0.4	--	--	I1	3
HF620-0R7-4	3.3	0.75	1.8	0.4		
HF620-1R5-4	4.8	1.5	3.3	0.75		
HF620-2R2-4	5.7	2.2	4.8	1.5		
HF620-3R7-4	10.2	3.7	5.7	2.2	I2	3.5
HF620-5R5-4	15	5.5	10.2	3.7		
HF620-7R5-4	18	7.5	15	5.5		
HF620-011-4	24	11	18	7.5		
HF620-015-4	32	15	24	11	I3	4.5
HF620-018-4	41	18.5	32	15		


HF620-022-4	47	22	41	18.5	14	10.5
HF620-030-4	65	30	47	22		
HF620-037-4	75	37	65	30		
HF620-045-4	94	45	75	37	15	35
HF620-055-4	115	55	94	45		
HF620-075-4	155	75	115	55		
HF620-090-4	188	90	155	75	16	52
HF620-110-4	215	110	188	90		
HF620-132-4	265	132	215	110	17	108.5
HF620-160-4	330	160	265	132		
HF620-185-4	365	185	330	160		
HF620-220-4	438	220	365	185	18	146
HF620-250-4	485	250	438	220		
HF620-280-4	545	280	485	250		
HF620-315-4	610	315	545	280		
HF620-355-4	668	355	610	315	19	210
HF620-400-4	720	400	668	355		
HF620-450-4	820	450	720	400		

120% 5 1
150% 5 1


2.4

HF620

HF620-0R4-4 HF620-011-4

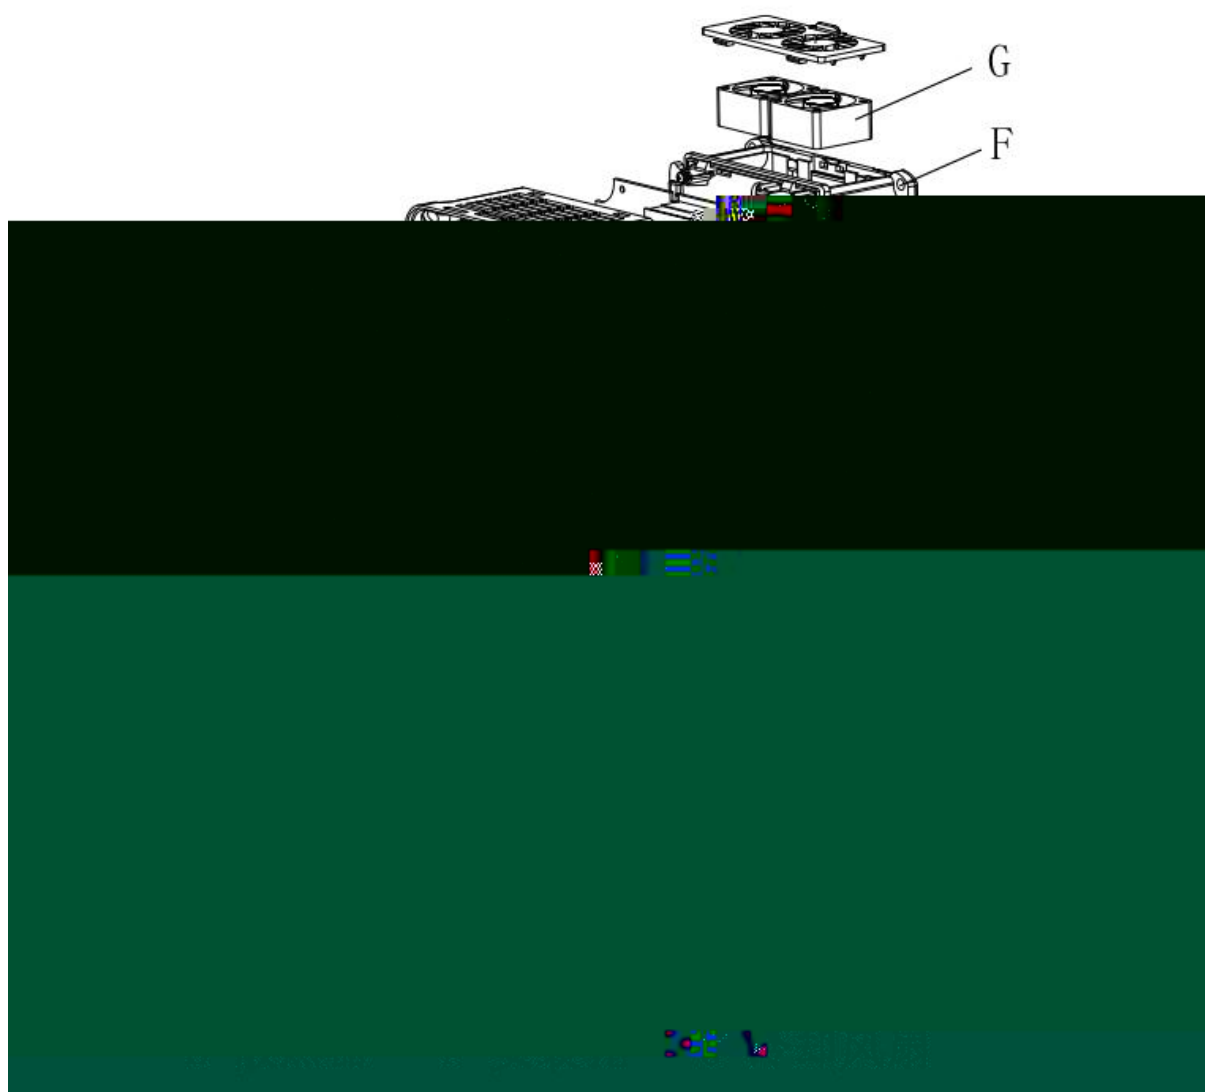


HF620-015-4 HF620-018-4

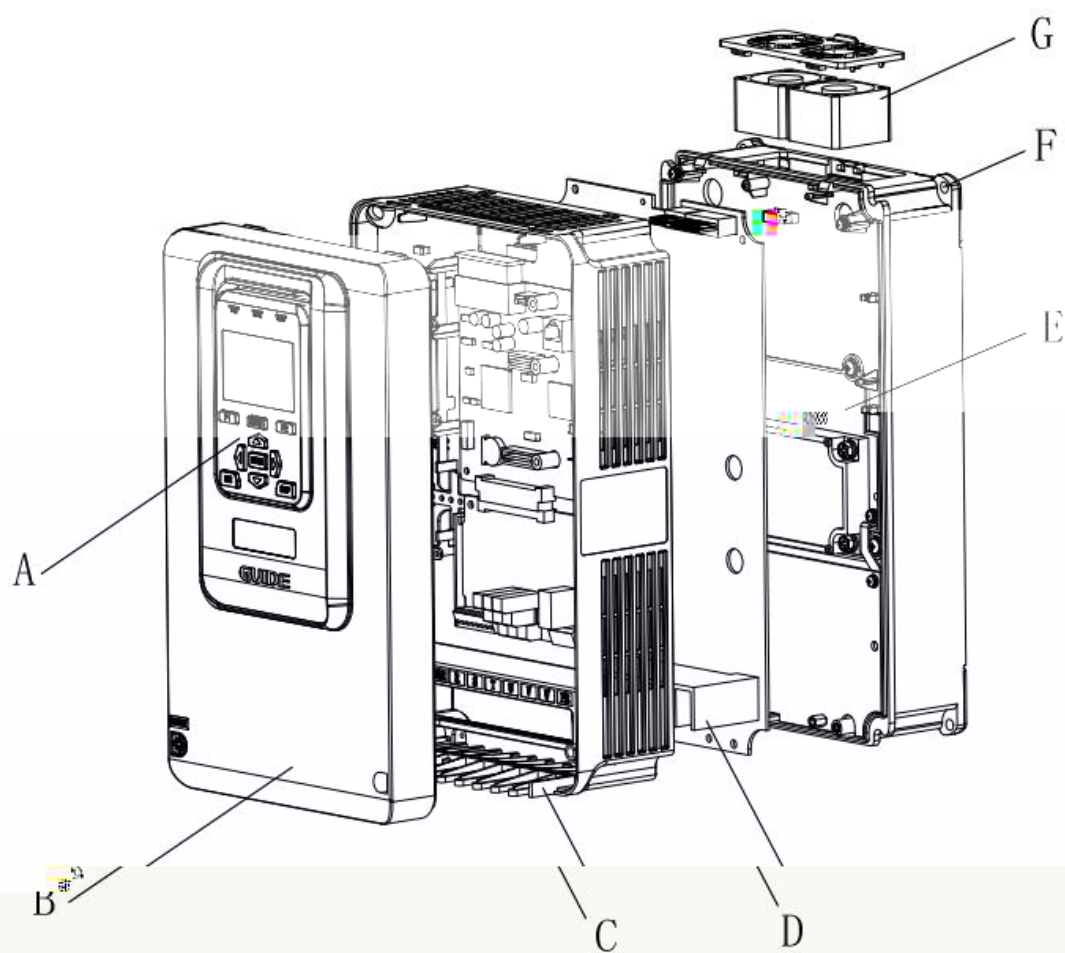


A-操作器 B-面盖 C-进线板 D-主回路端子


E-主回路端子

HF620-022-4 HF620-037-4

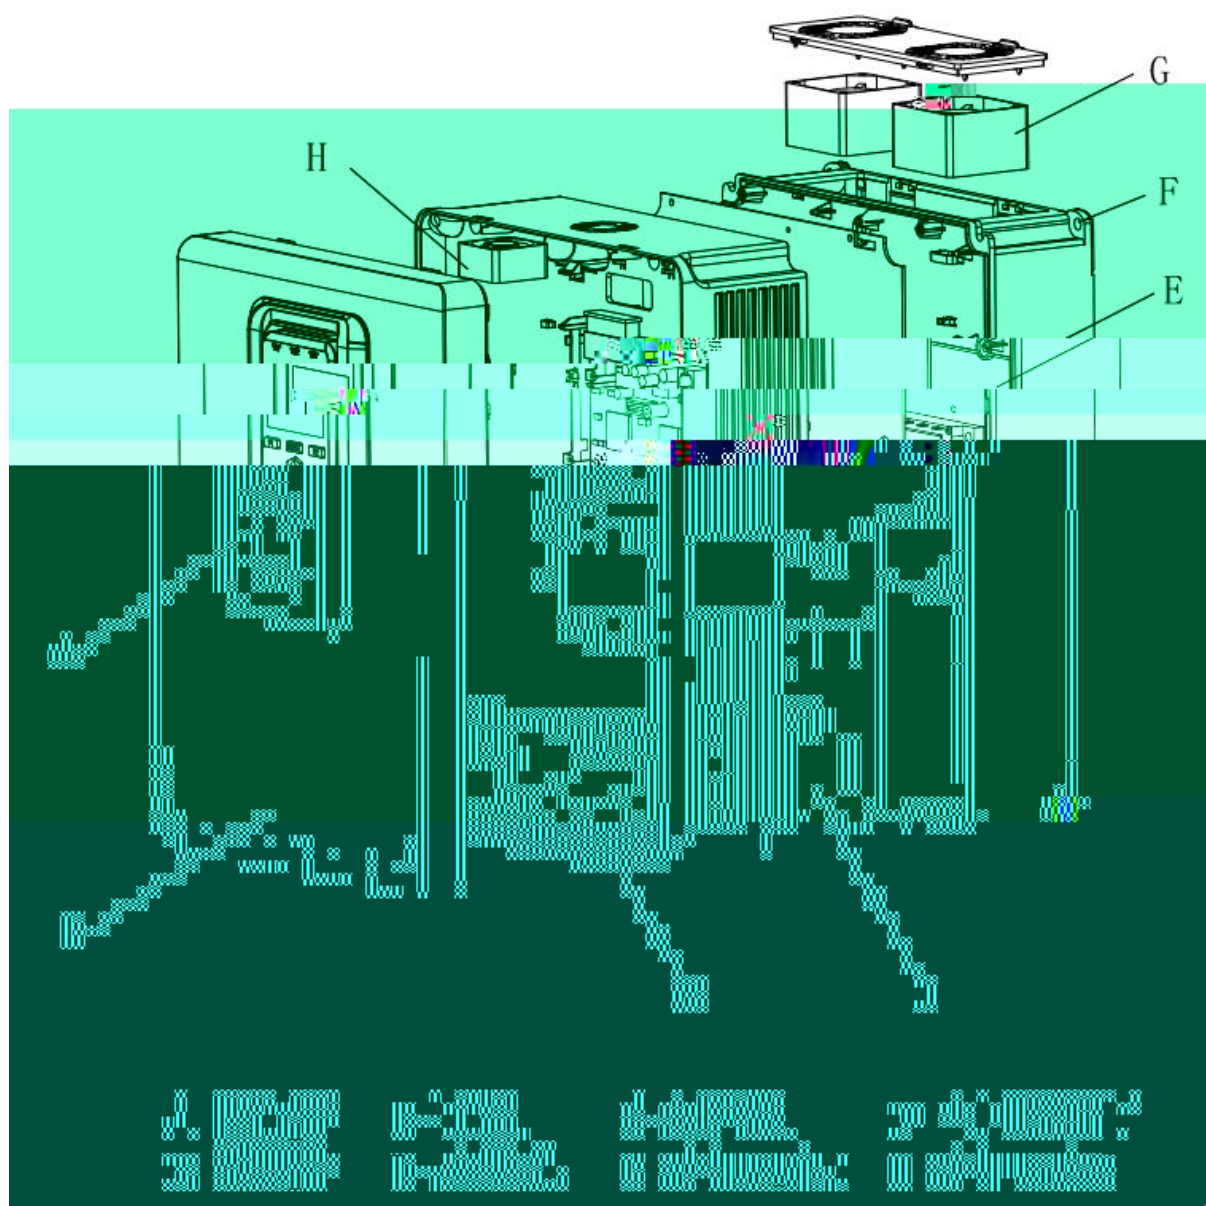


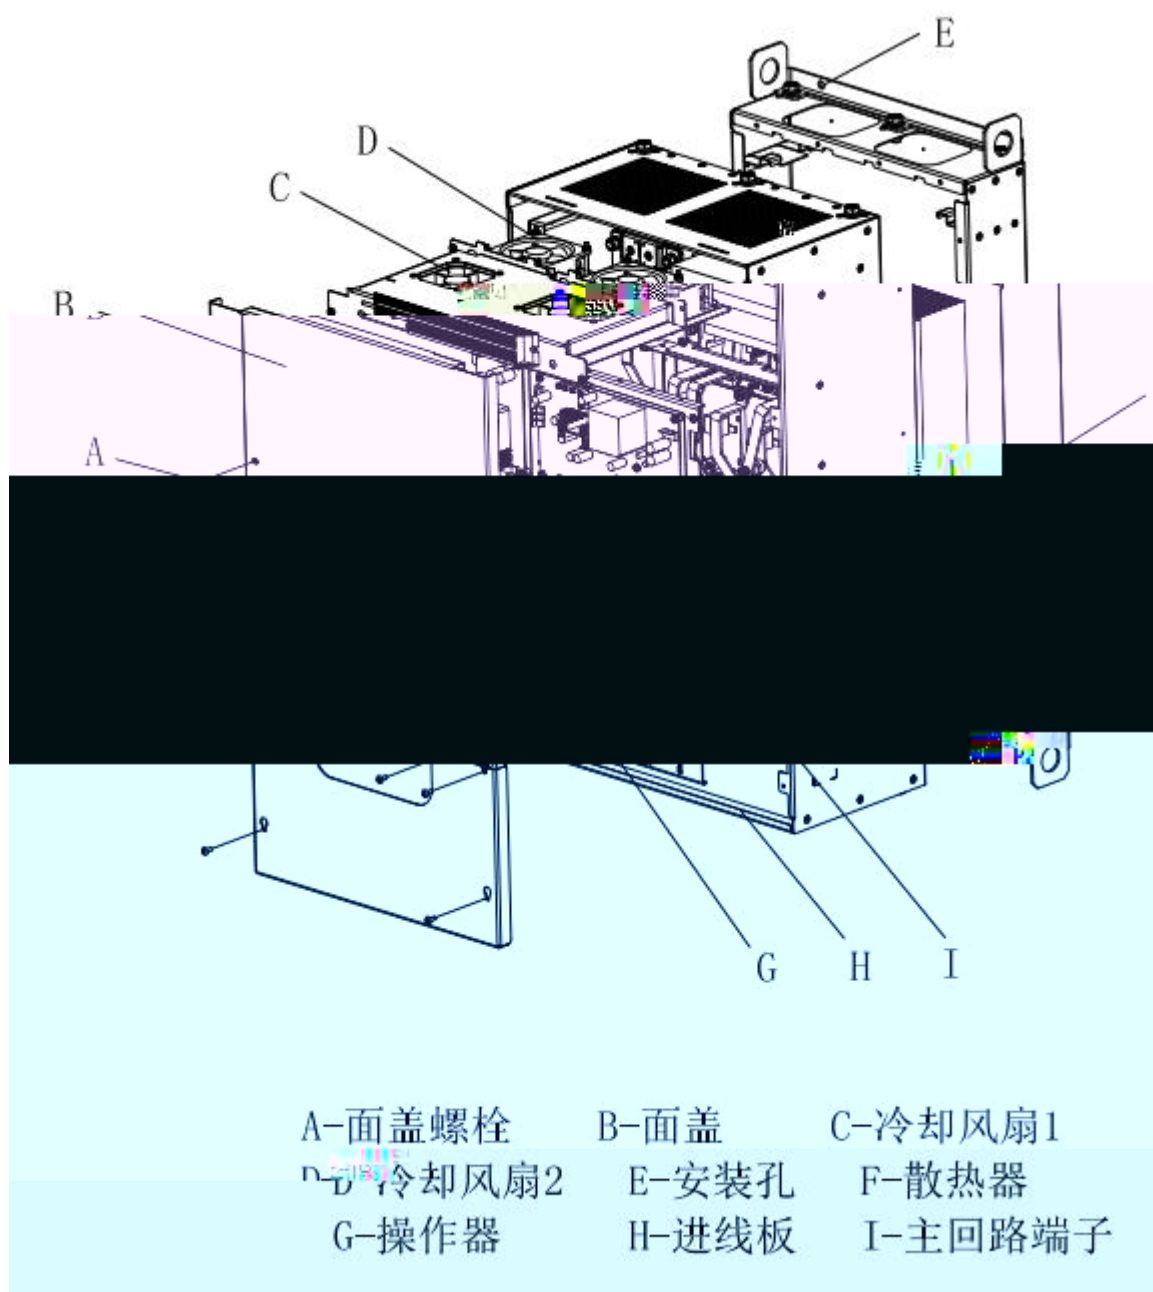


2.5

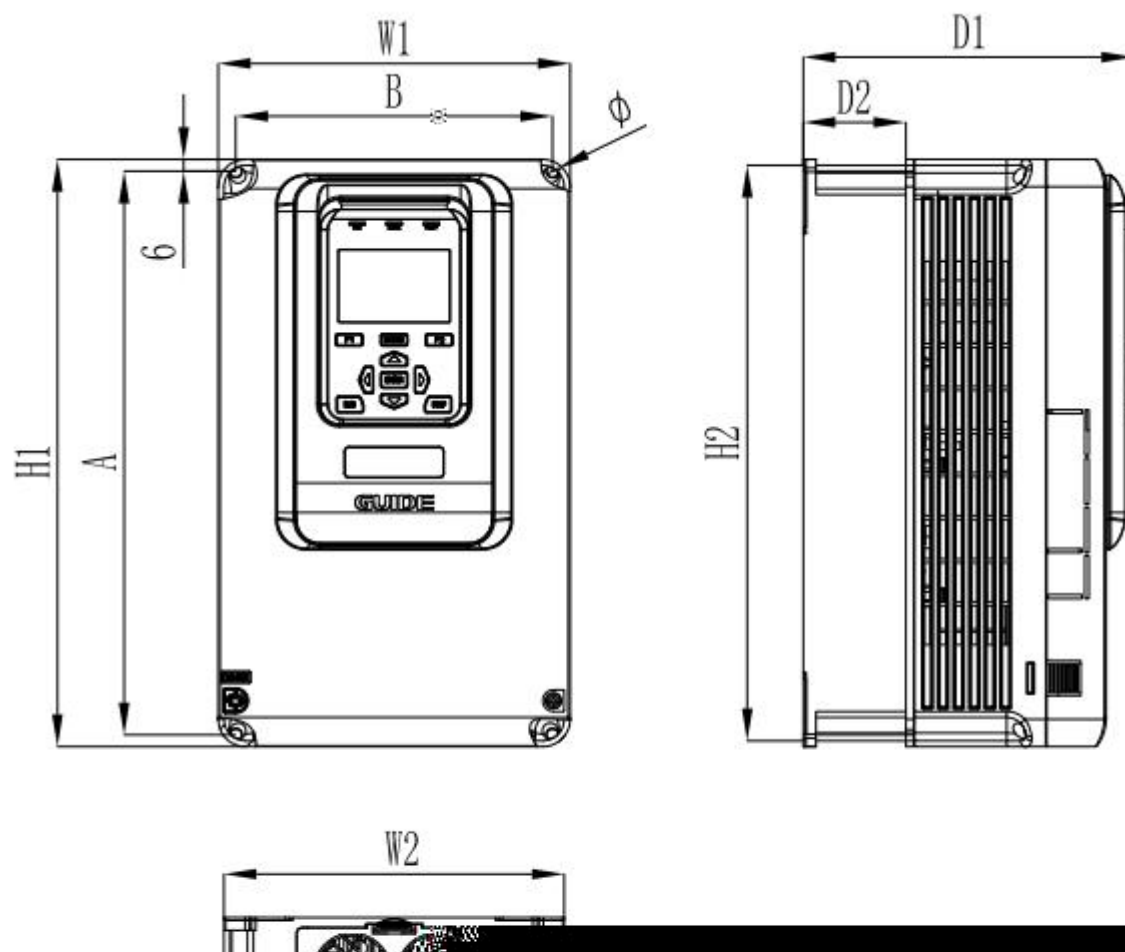


I1-I3

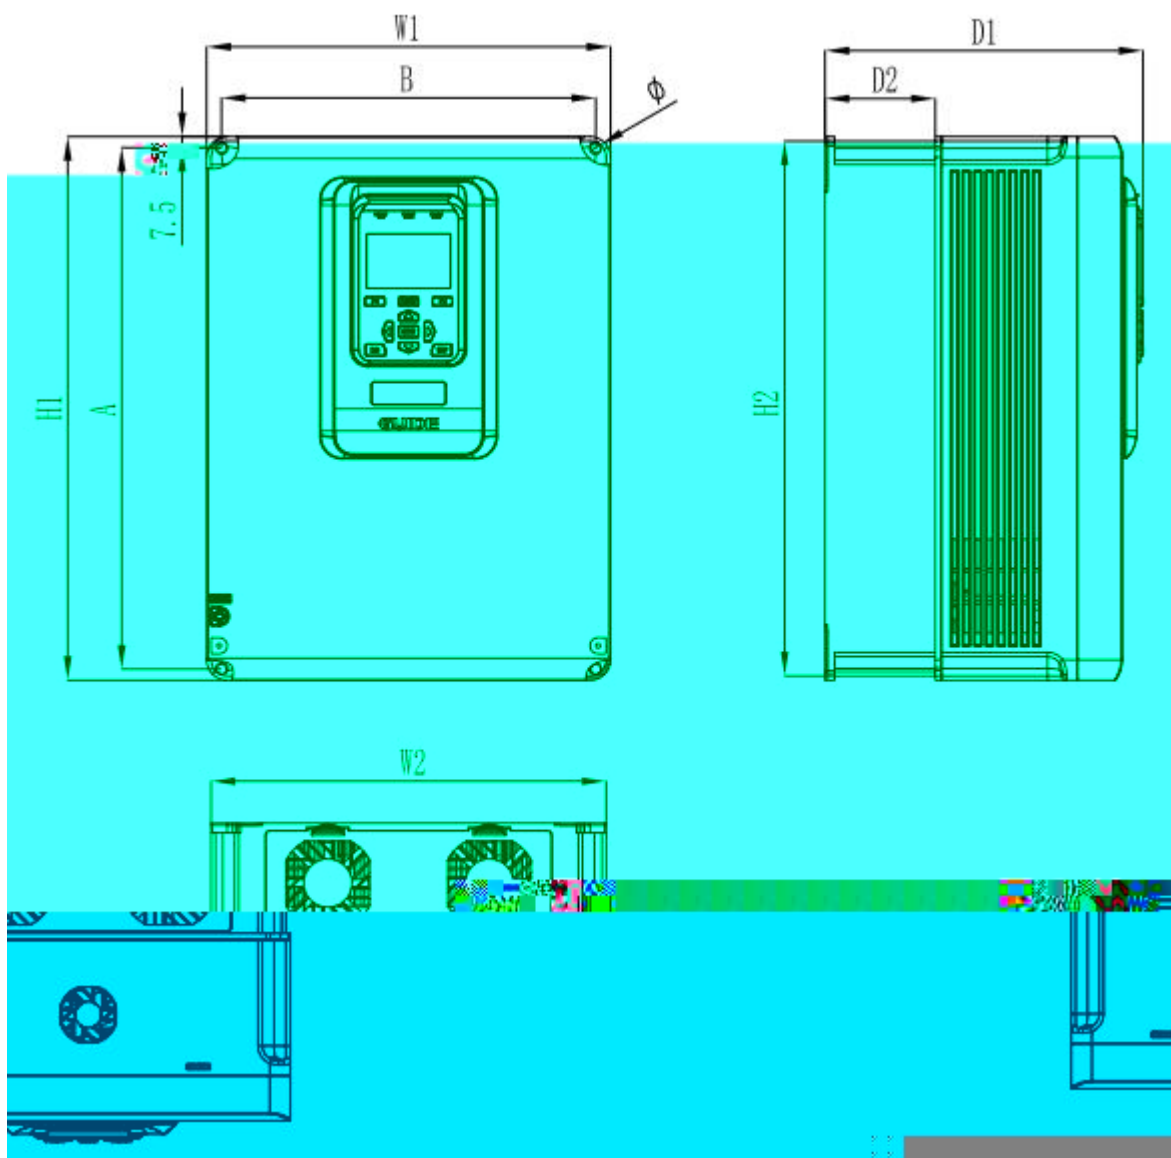

14

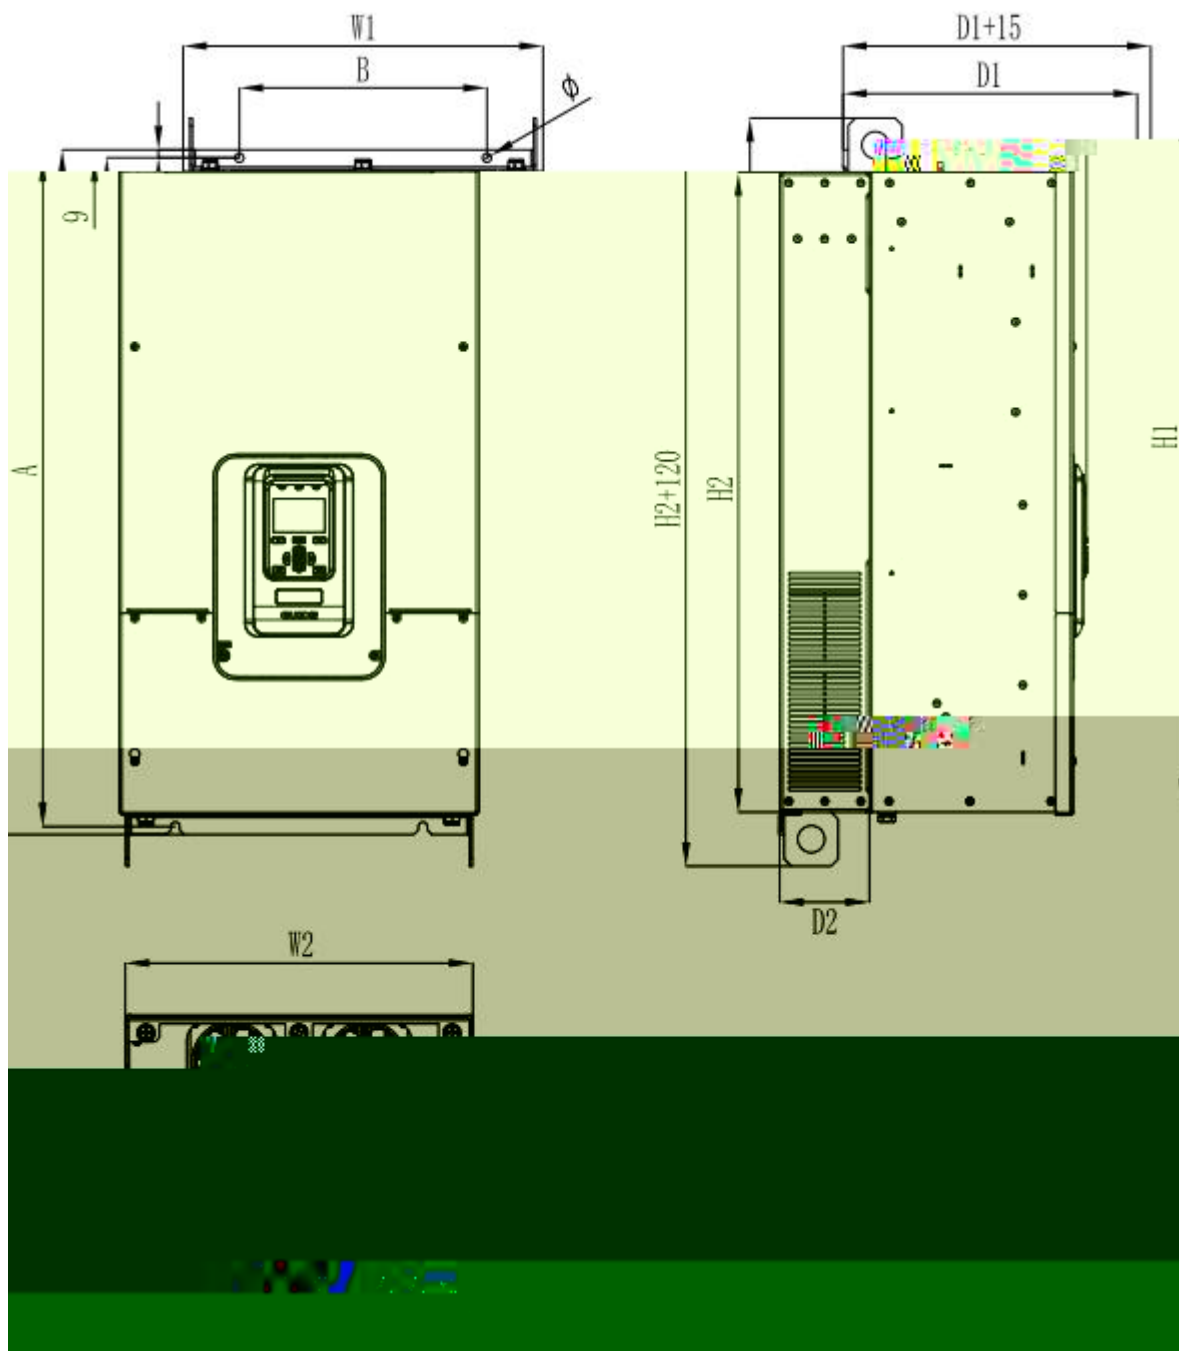

I5-I6

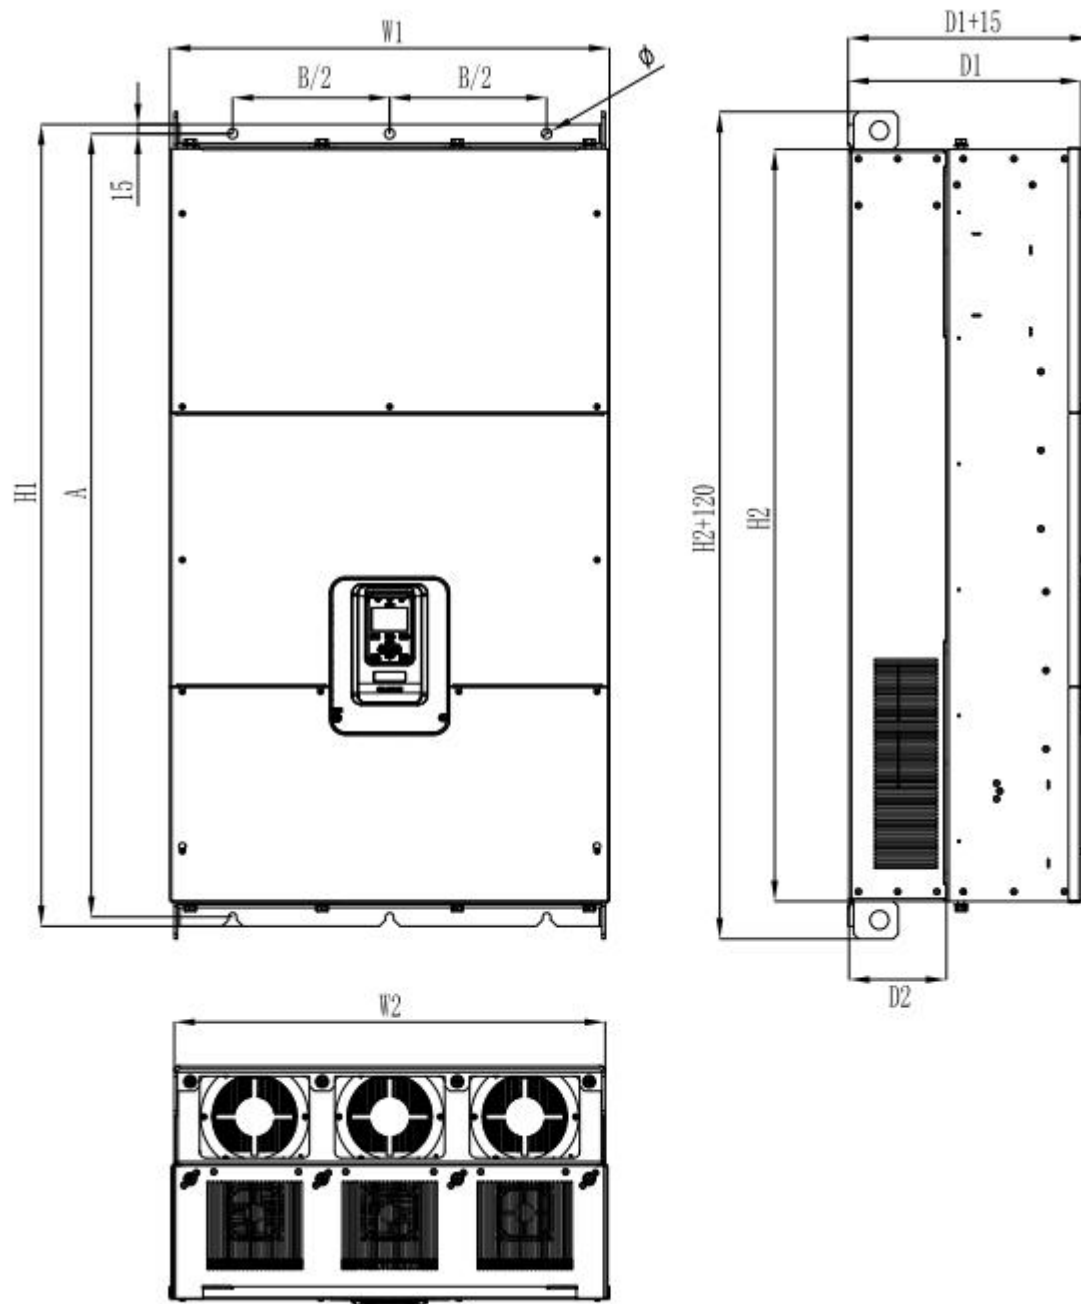

17-19

		(mm)						mm			8.8	Kg
		H1	H2	W1	W2	D1	D2	A	B	φ	M	
I1	0.4KW	260	254	140	134	170	52.5	248	122	4- φ 6	4-M5	3
	0.75KW											
	1.5KW											
	2.2KW											
I2	3.7KW	260	254	140	134	170	52.5	248	122	4- φ 6	4-M5	3.5
	5.5 KW											
	7.5 KW											
	11 KW											
I3	15 KW	300	294	180	174	170	52.5	288	162	4- φ 6	4-M5	4.5
	18.5KW											
I4	22 KW	370	364	275	269	215	75	355	255	4- φ 7	4-M6	10.5
	30 KW											
	37 KW											
I5	45 KW	600	565	340	326	282	110	585	225	2- φ 9	4-M8	35
	55 KW											
	75 KW											
I6	90 KW	760	710	400	386	327	100	742	275	2- φ 9	4-M8	52
	110 KW											
I7	132 KW	930	850	490	476	335	155	900	350	3- φ 13	6-M12	108.5
	160 KW											
	185 KW											
I8	220 KW	1140	1060	500	486	355	155	1110	350	3- φ 13	6-M12	146
	250 KW											
	280 KW											
	315 KW											
I9	355 KW	1275	1195	700	686	370	155	1245	500	3- φ 15	6-M14	210
	400 KW											
	450 KW											

10

DP CAN Modbus Ethernet Profinet

/

4

		/ /								
		8	2	-10	+10V	0mA/4mA	20mA			
		5	3	2				2		
		0	+10V	0mA/4mA	20mA					
	LED									
		1000	1000							
		100	1%							
		3000								
		-10	+40	40						
		1	1%	50						
		-10								
		95%RH								
		-20	+60							
		10-30								
		>0.85	>0.999							
		98%								
		3	J14	I0		J15				
		I0	J13	PG						
		IP20								
	2									
		≤ 80db								

2.7

- (1) 200%
- (2) 50% HF620
- (3) HF620


2.8

GDHF-DP03	GDHF-DP03 Profibus HF620
GDHF-PGC2 PG	GDHF-PGC2 PG HF620 15V
GDHF-PGD2 PG	GDHF-PGD2 PG HF620 15V
GDHF-MB02	GDHF-MB02 MODBUS HF620
GDHF-PN02	PROFINET TCP/IP IT GDHF-PN02 PROFINET HF620
GDHF-K6E1	GDHF-K6E1 LED HF620

3.

1.	/ " "
2.	/
3.	
-	R S T
-	U V W
-	P1 P N
4.	10
5.	
	
1.	
2.	
3.	
40	

3.1

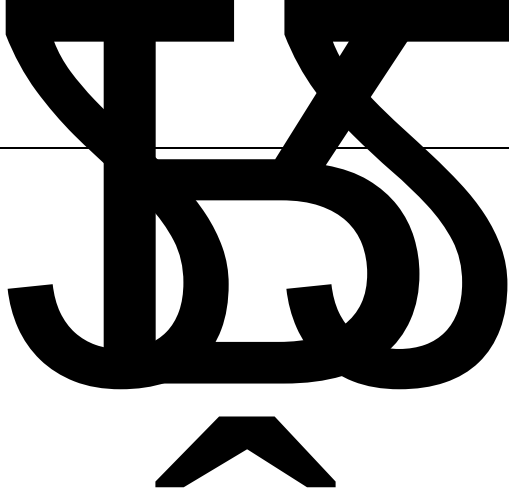

10cm
5cm

6

-10 +40
40

1
50

1%

-20

+60
1 /

-20 +60

-10

A

SS

E 50-150
2%


S

SS U




3.2


3.2.1

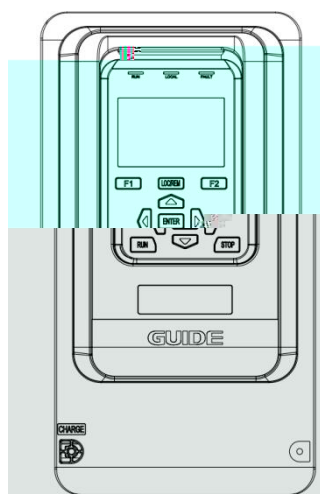

OK

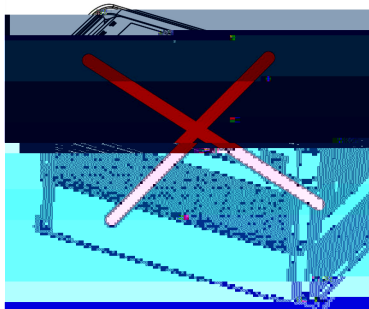


NG

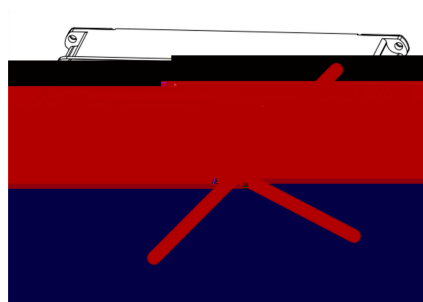


NG

3.2.2


1

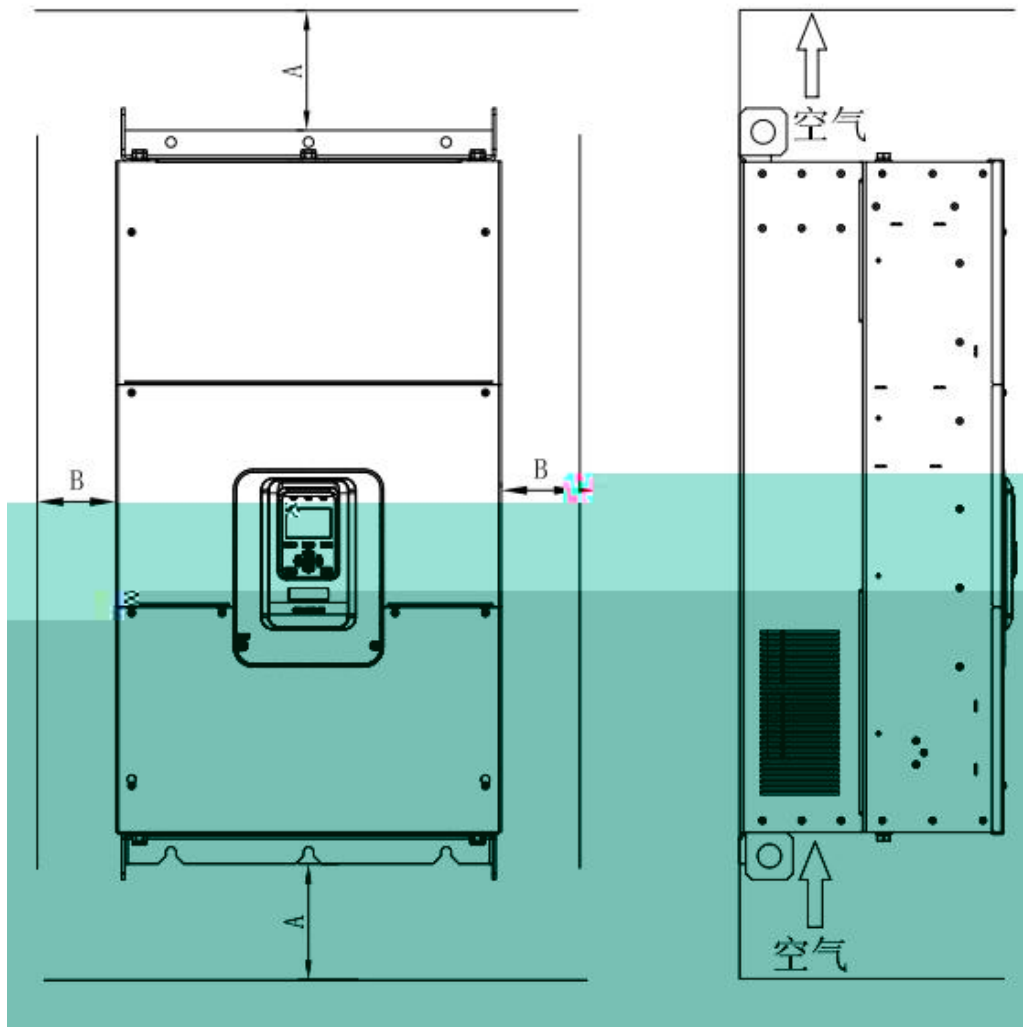


3-1

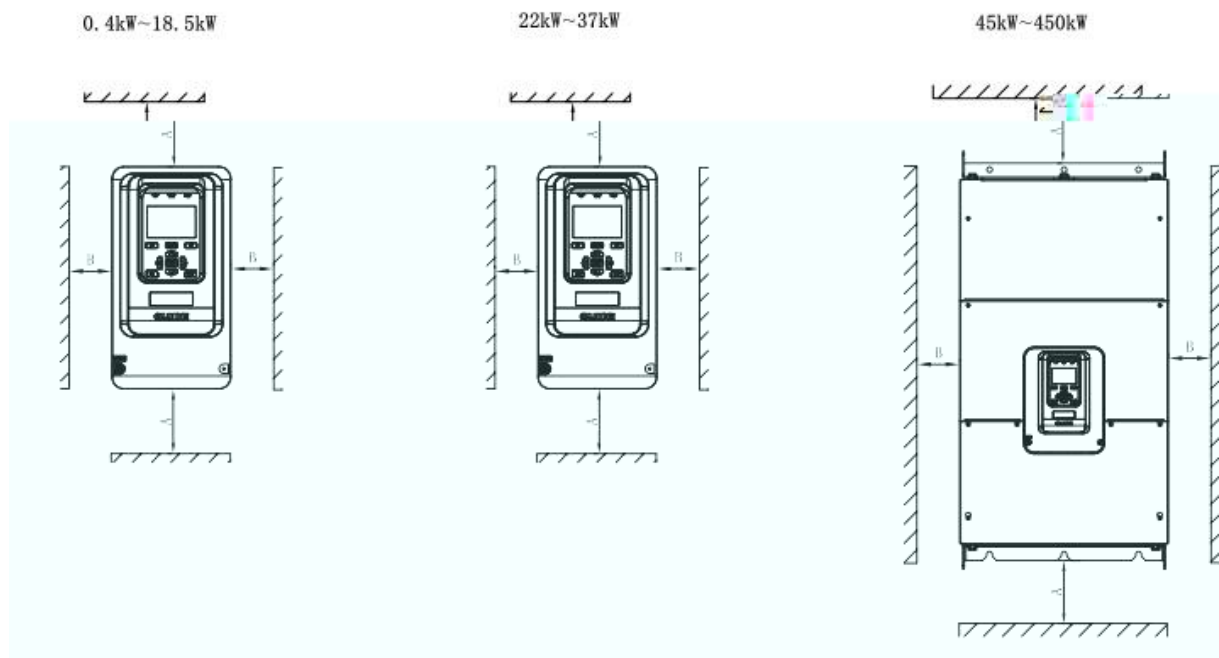


0.4kW~18.5kW	$A \geq 100\text{mm}$	$B \geq 40\text{mm}$
22kW~37kW	$A \geq 200\text{mm}$	$B \geq 50\text{mm}$
45kW~450kW	$A \geq 300\text{mm}$	$B \geq 50\text{mm}$

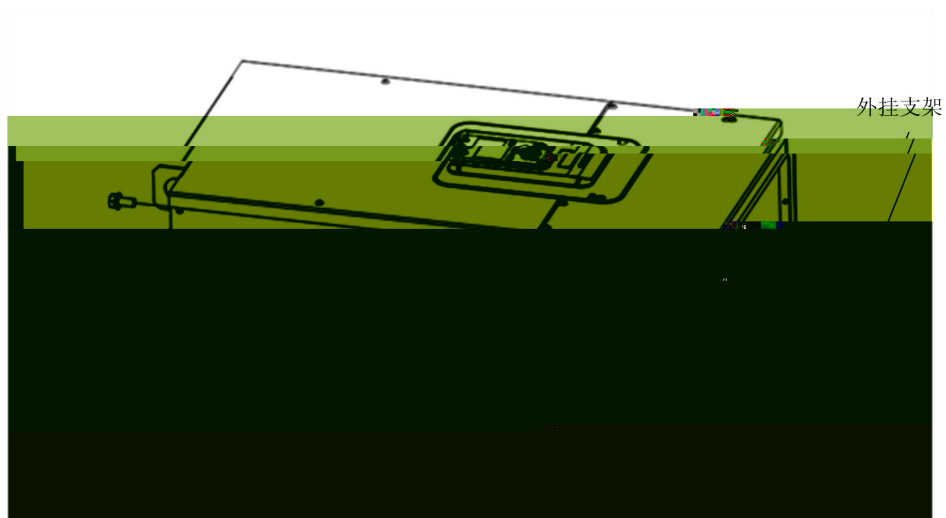

3-2

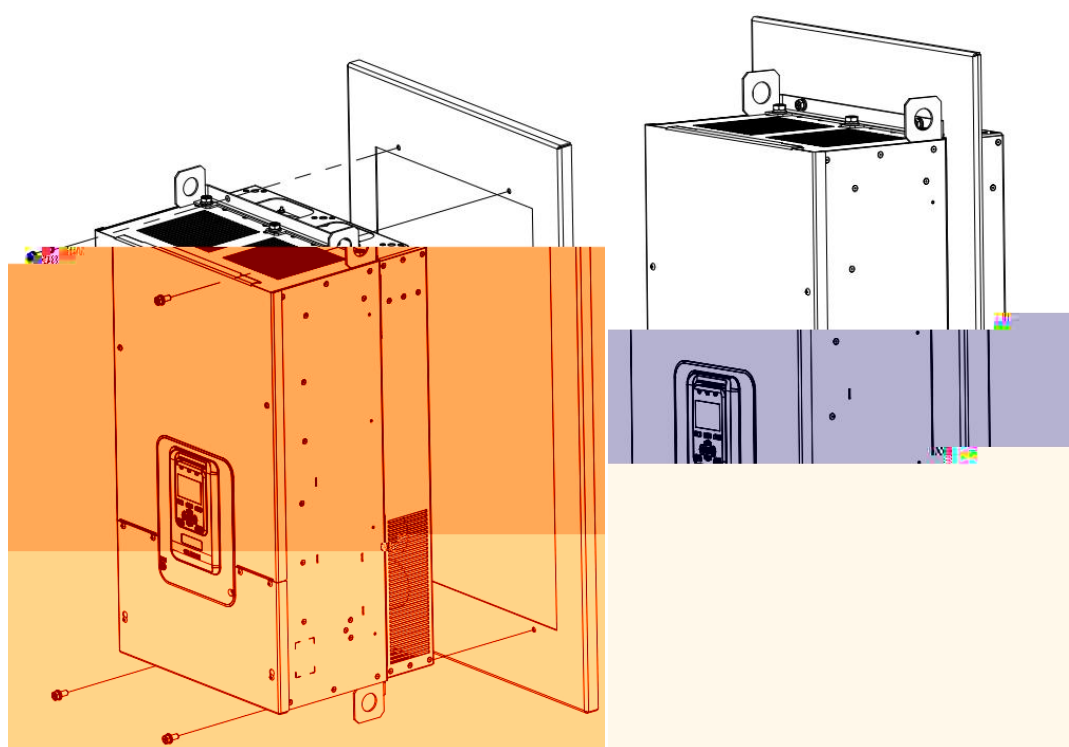

3-3

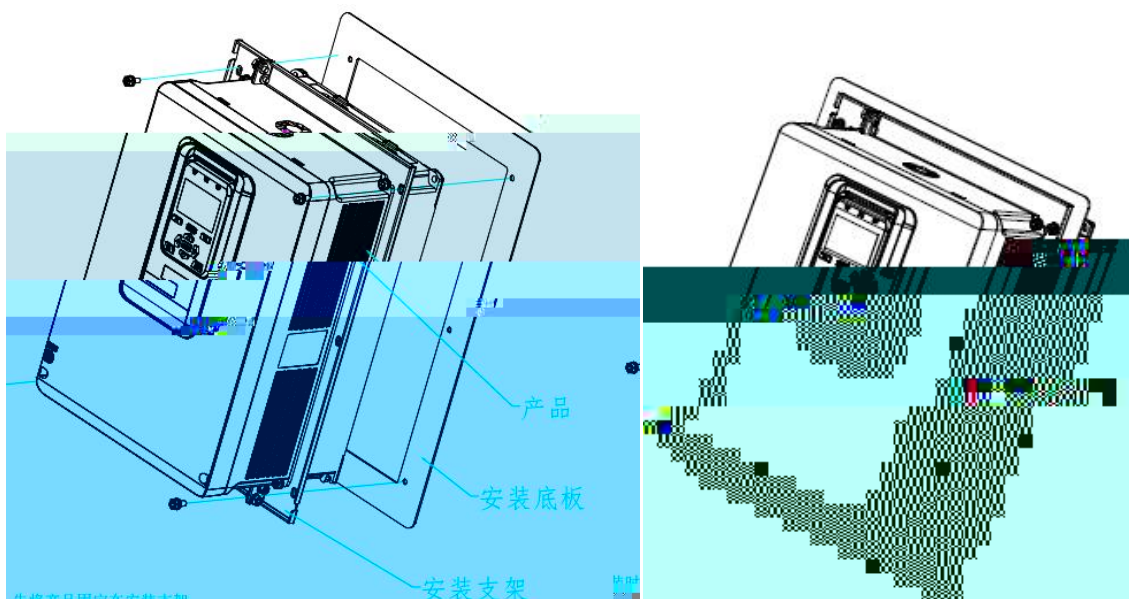


3-4

1


2

3

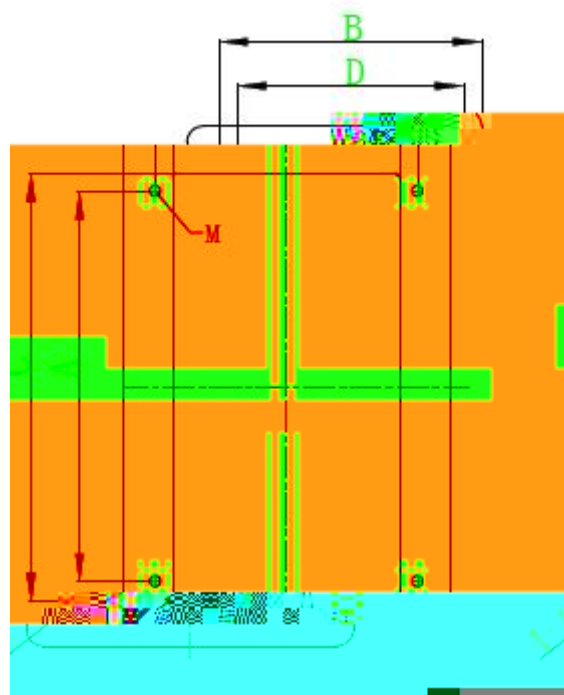


3-5

I1-I2

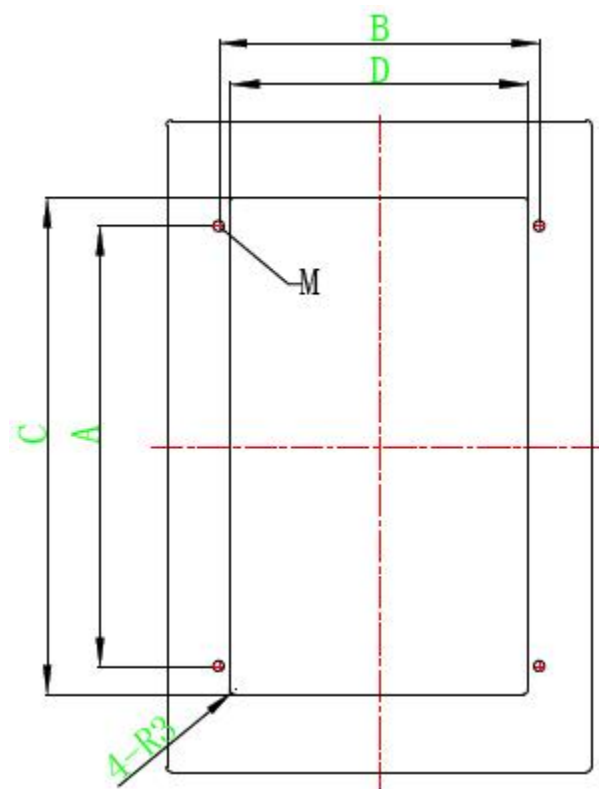


3-6

I3

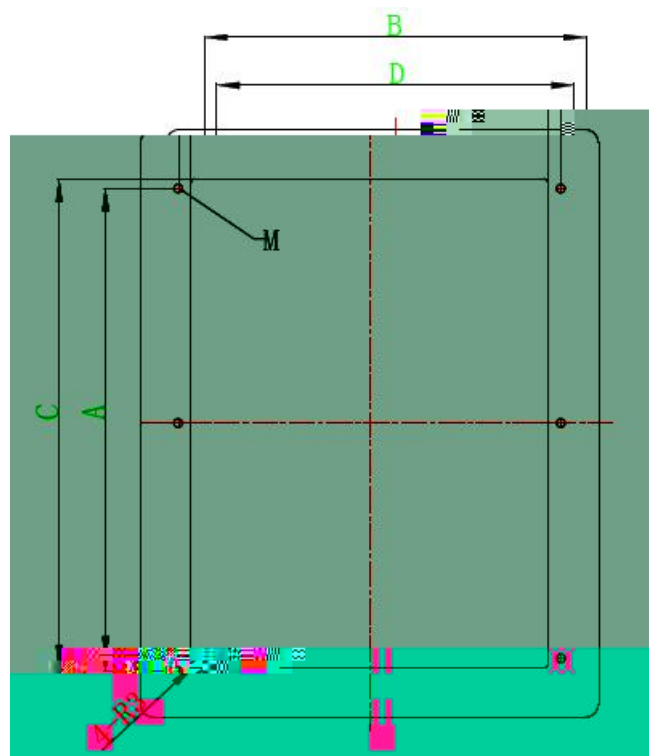


3-7

14

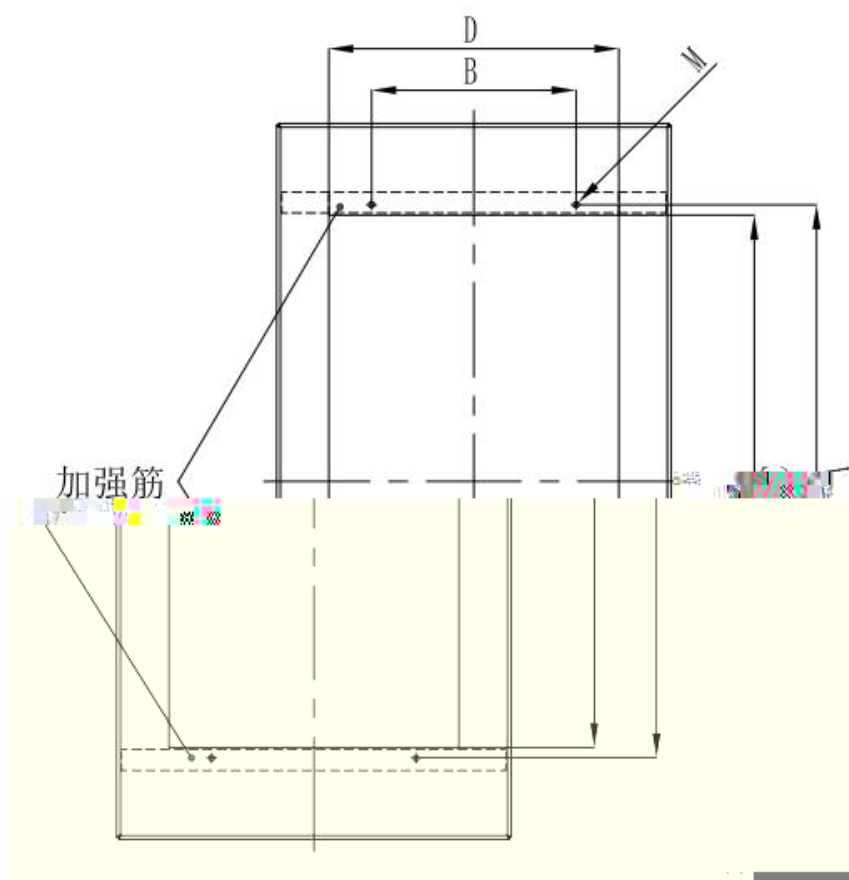

3-8

15-16

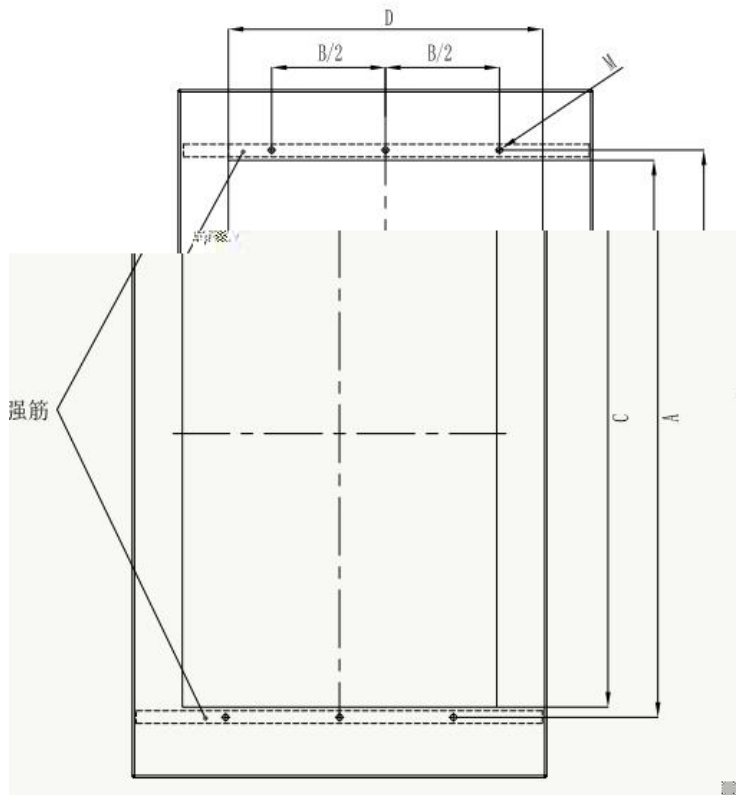

3-9

17-19

	(mm)		(mm)		
	A	B	C	D	
I1	240	160	262.5	138	4-M6
I2	240	160	262.5	138	4-M6
I3	270	197	304	182	4-M6
I4	360	292	374	273	6-M6
I5	585	275	570	330	4-M6
I6	742	275	715	390	4-M8
I7	900	350	855	480	6-M12

I8	1110	350	1065	490	6-M12
I9	1245	500	1200	690	6-M14


3.2.3

1

100mm


2

3-10

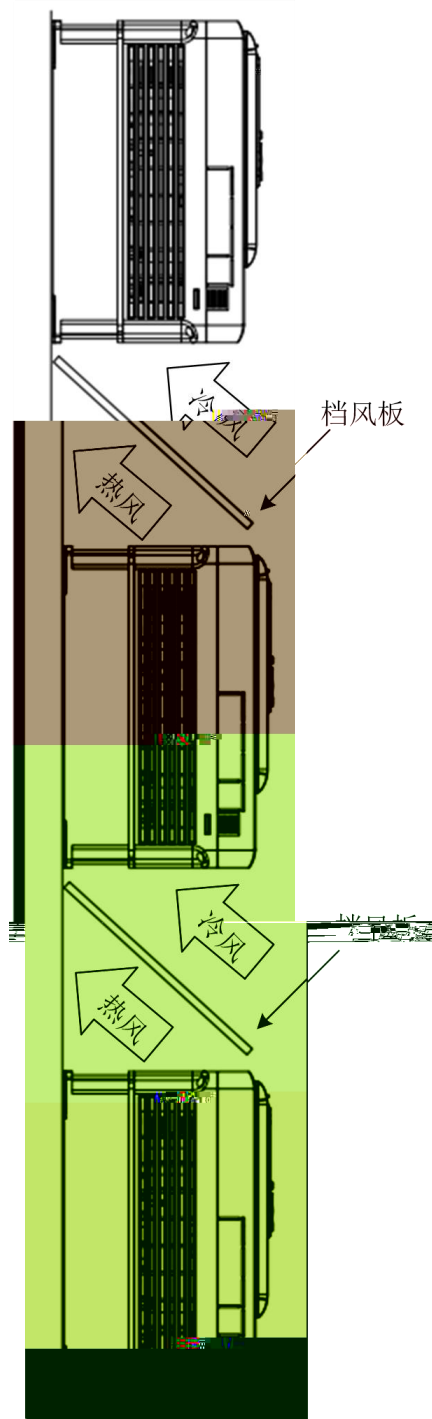

3-10


3-11

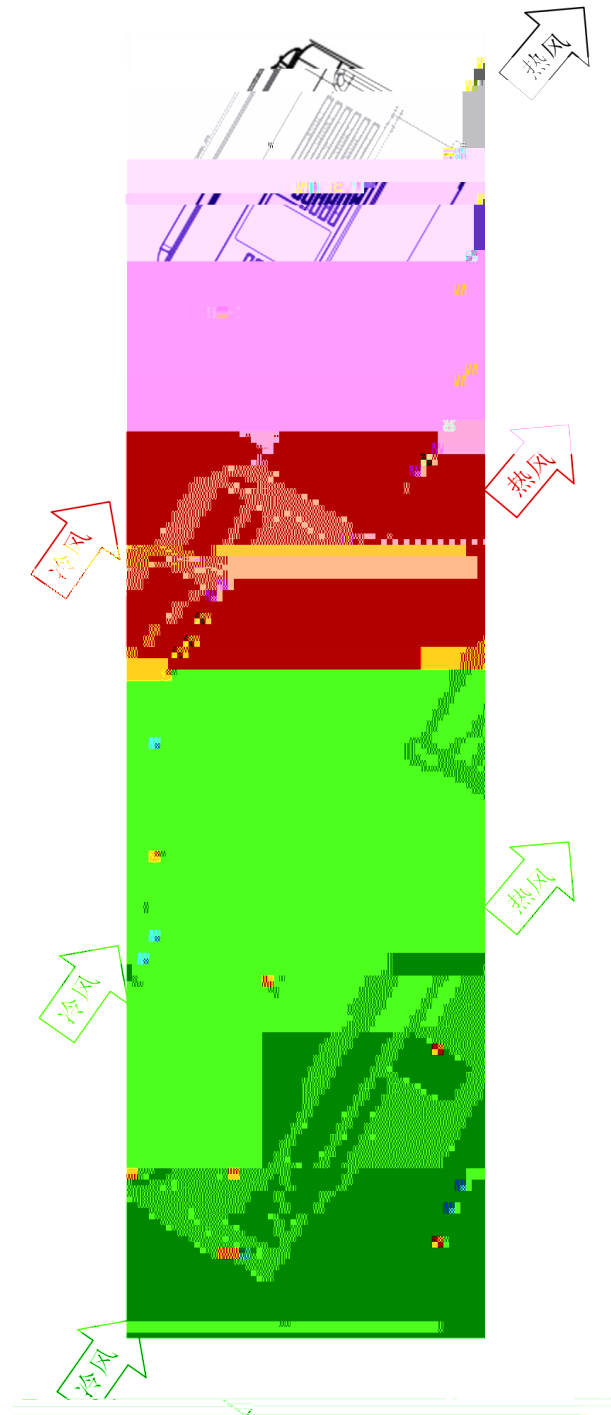

3-11

3.3


1	1	4	5mm
2	2		
3	3		

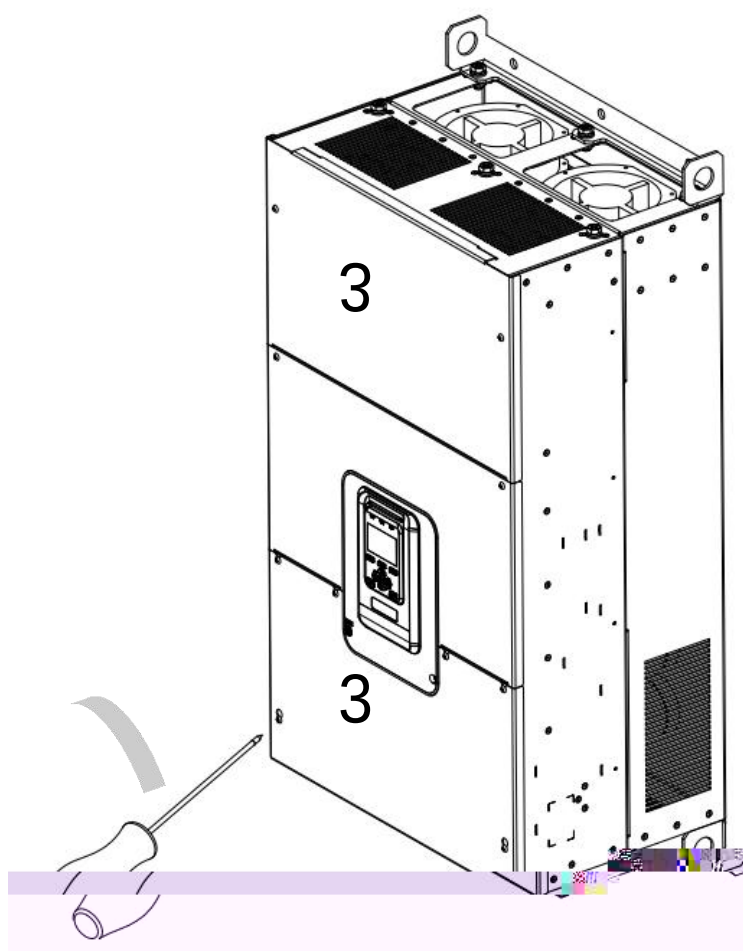

3-12

3.4


HF620

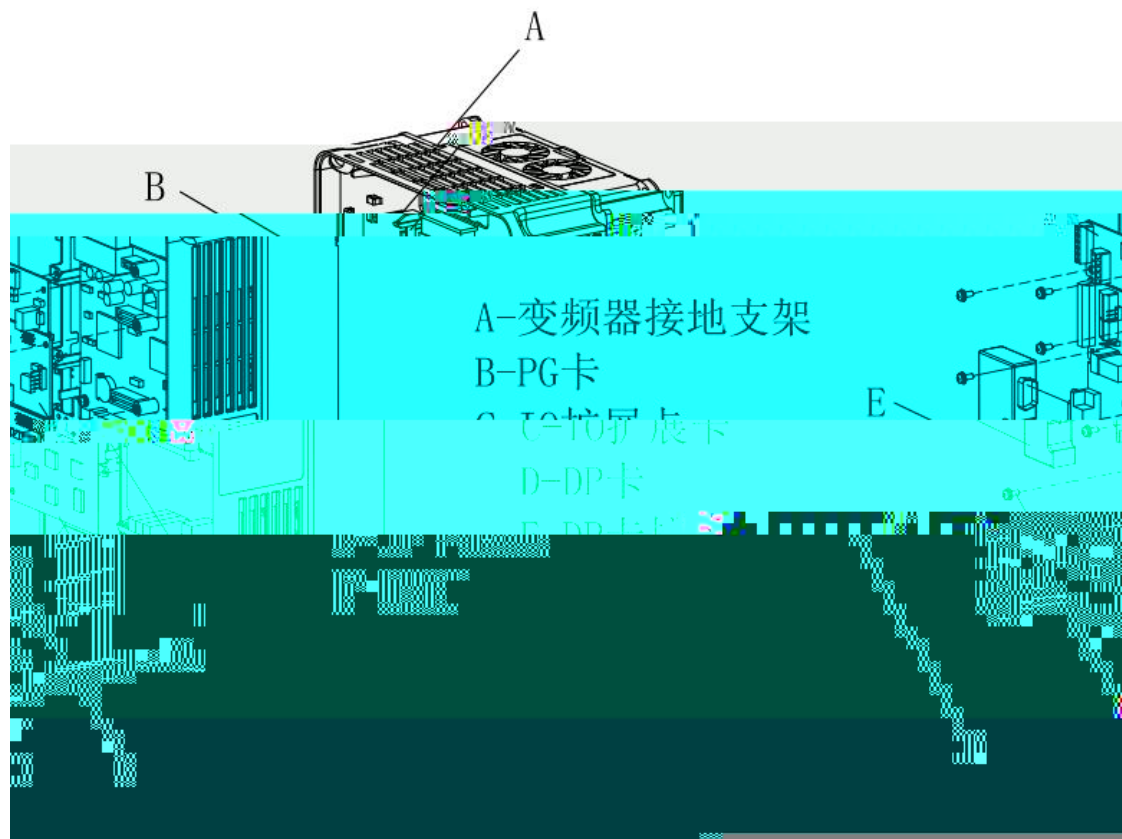


37kW

18.5KW

DP

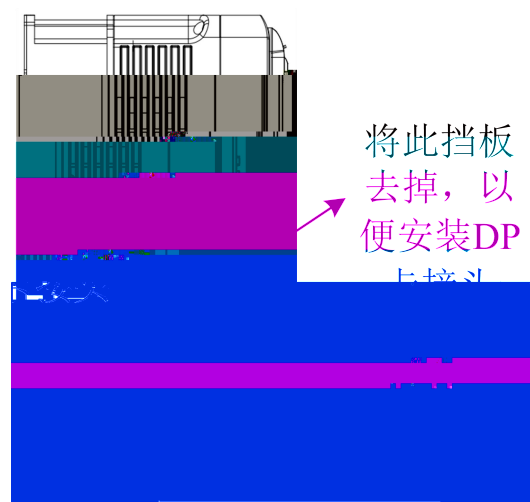

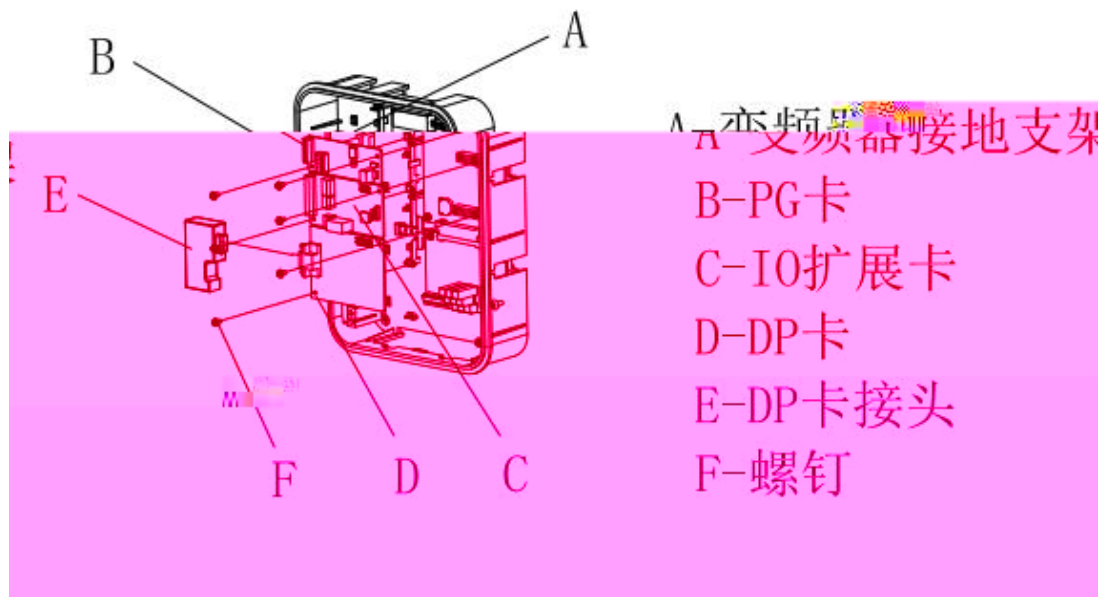

37KW

3.5 PGC2

GDHF-PGC2 PG 11

A+	A-	B+	B-	Z+	Z-
+15V	GND	AO	GND	BO	

+15V, GND		...	15V ± 5%	300mA
A+, A- B+, B- Z+, Z-		0-80kHz	0-15V	...
AO, GND BO		0-50kHz	0-24V	...


PE

PE


PGC2

1	PG					
2					PG	
3					PE	
4			PG	A-	B-	Z- GND
5	PGC2		15V			RS-422
					PGC2	
			15V			


1
a

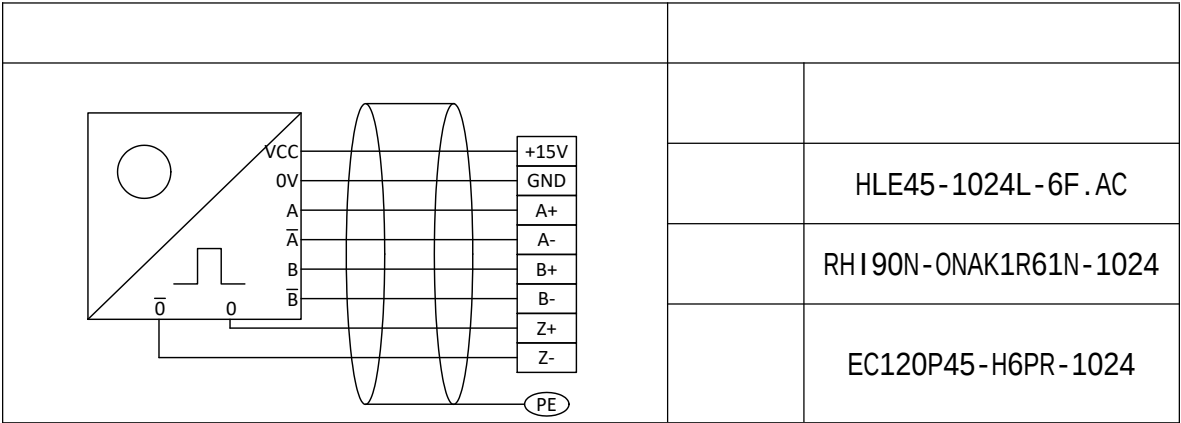


b

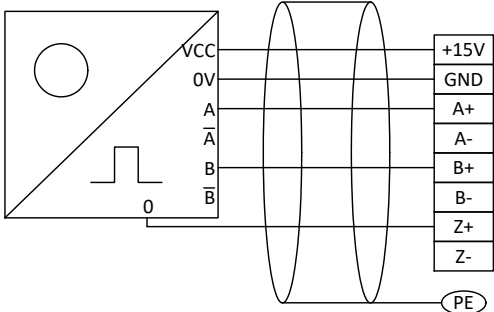
		
		HLE45-600L-3F.AC
		RV178N-10CALA31N-1024
		EC120P45-P6PR-1024

2

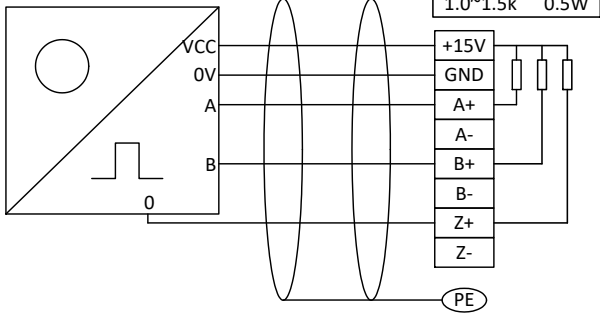		
		HLE45-1024L-30C.AC
		EB38A6-C4PR-1024

3

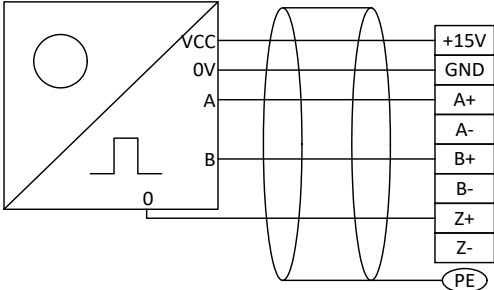		
		HLE45-600L-3R.AC
		EB50A8-N4PR-1024

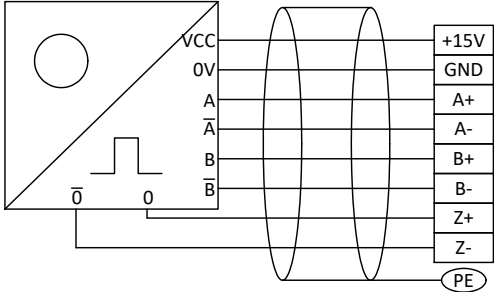			
			HLE-45-600L-6LY.AC
			RHI58N-0BAK1R6XN-1024
			EC120P45-L6TR-1024

3.6 PGD2


GDHF-PGD2	PG	10				
	B-	B+	A-	A+	GND	+15V
	B1-		B1+	A1-	A1+	

+15V, GND		...	15V ± 5%	300mA
A+, A- B+, B-		0-80kHz	0-15V	...
A1+, A1- B1+, B1-		0-80kHz	0-15V	...

PE

PE

PGD2

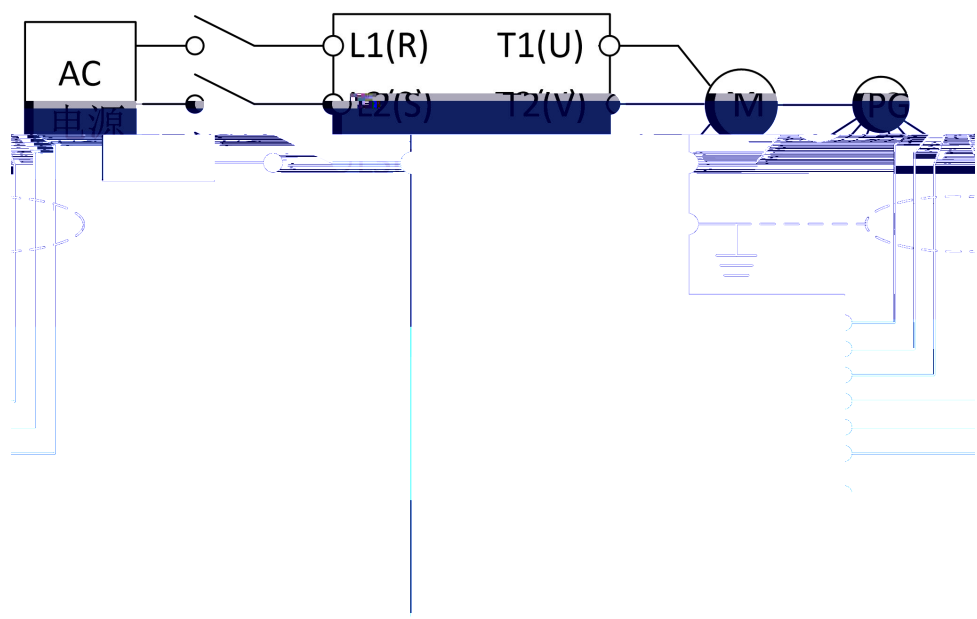

1 PG

2 PG

3 PE


PGD2

1

a

		HLE45-1024L-6F.AC
		RHI90N-ONAK1R61N-1024
		EC120P45-H6PR-1024

b



4.

4




14
15


30 m

4.2

1
0.4kW~75kW



+

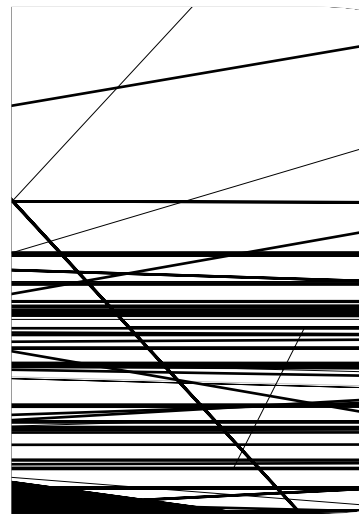

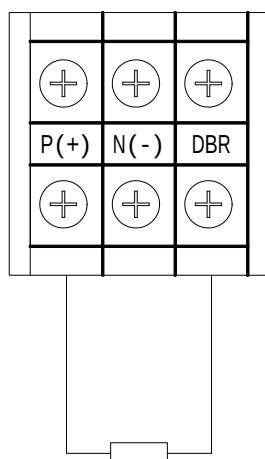

(3)

220kW~450kW

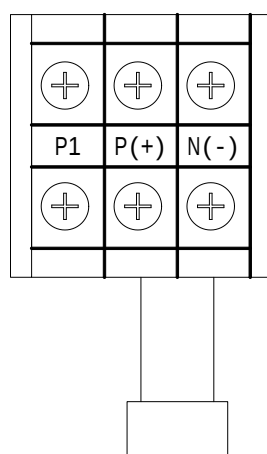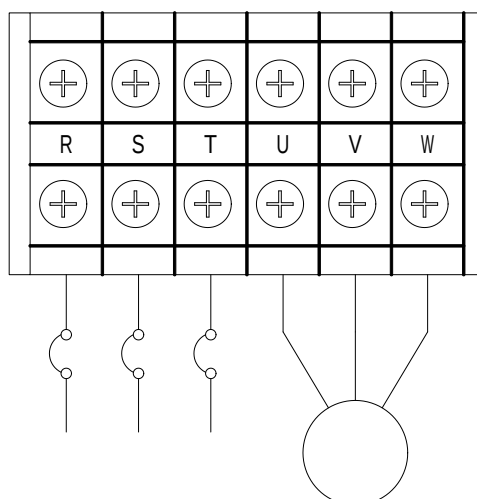

I1	0.4KW	M4	
	0.75KW		
	1.5KW		
	2.2KW		
I2	3.7KW		
	5.5 KW		
	7.5 KW		
	11 KW		
I3	15 KW	M5	
	18.5 KW		
I4	22 KW	M6	
	30 KW		
	37 KW		
I5	45 KW	M8	+
	55 KW		
	75 KW		
I6	90 KW		
	110 KW		
I7	132 KW	M10	
	160 KW		
	185 KW		
I8	220 KW		
	250 KW		
	280 KW		
	315 KW		
I9	355 KW	M12	
	400 KW		
	450 KW		


P(+)	
P1	45KW
N(-)	
R S T	
U V W	
DBR	185KW
PE	

4.3

1

	1	2	3	4	5	6	7	8
	+10V	GND	AI1+	AI1-	AI2+	AI2-	A01	A02
	9	10	11	12	13	14	15	16
	DI1	DI2	DI3	DI4	DI5	DI6	DI7	DI8
	17	18	19	20	21	22	23	24
	PW	COM	PW	+24V	+24V	D01	+24V	D02
	25	26	27	28	29	30	31	
	+24V	D03	D04A	D04C	D04B	D05A	D05C	

2

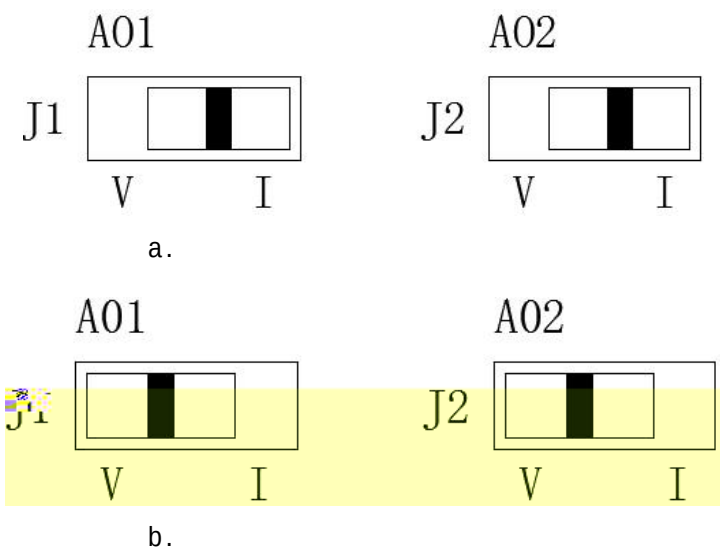


3

1	+10V	10V
2	GND	

[illegible]

29	D04B	4
	250VAC 3A COS =0.4	
	30VDC 1A	
30	D05A	5
	250VAC 2A COS =0.4	
	30VDC 1A	
31	D05C	5

4.4

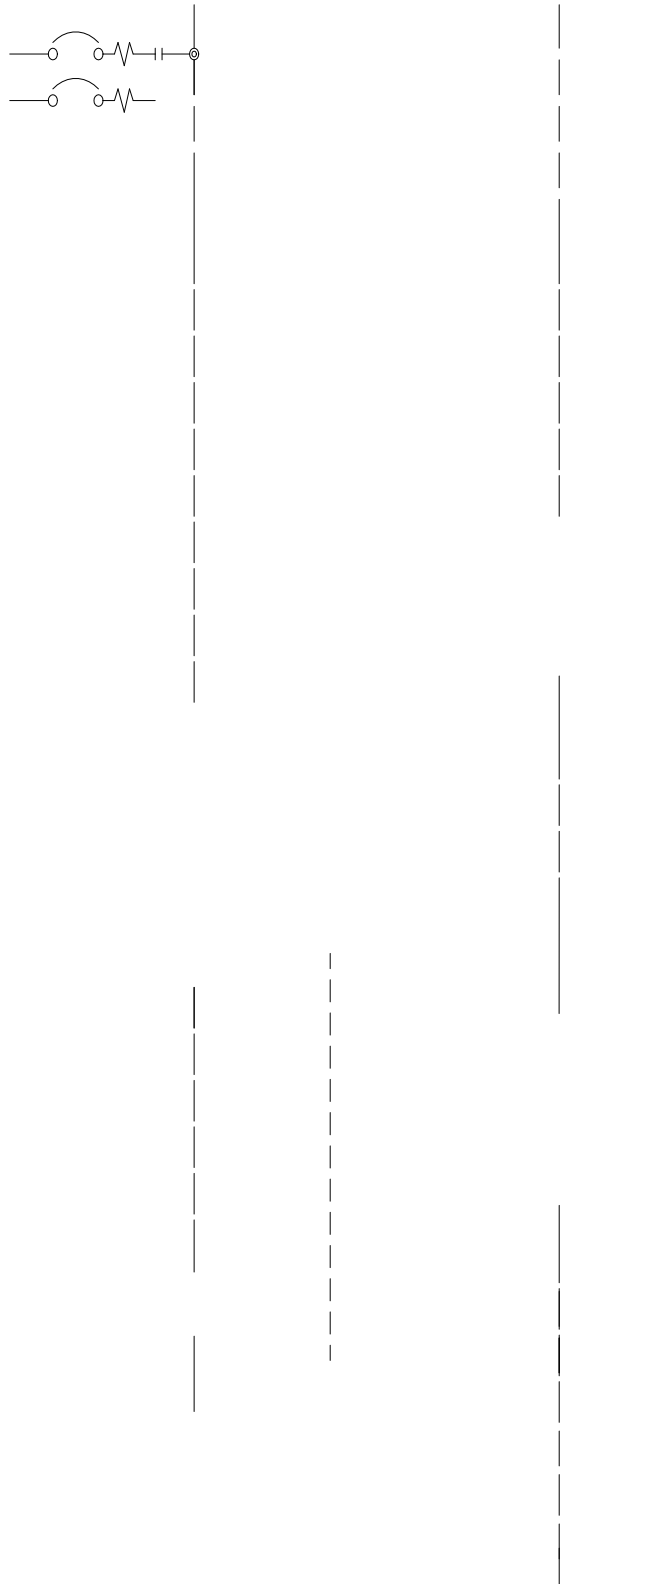


4.5

0V

NPN

NPN

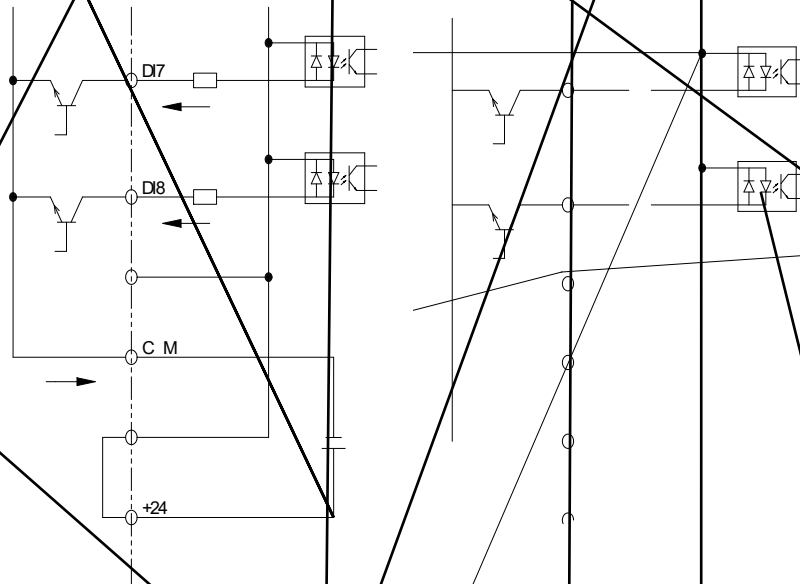

«ÉC (fé

4.7

	A	/ CEFR	mm ² 40%	A (AC-3)
HF620-0R4-4	1.8		2.5	9
HF620-0R7-4	3.3		2.5	9
HF620-1R5-4	4.8		2.5	9
HF620-2R2-4	5.7		2.5	9
HF620-3R7-4	10.2		2.5	12
HF620-5R5-4	15		2.5	18
HF620-7R5-4	18		2.5	18
HF620-011-4	24		2.5	25
HF620-015-4	32		4	32
HF620-018-4	41		4	50
HF620-022-4	47		6	50
HF620-030-4	65		10	65
HF620-037-4	75		10	80
HF620-045-4	94		16	95
HF620-055-4	115		16	115
HF620-075-4	155		25	150
HF620-090-4	188		35	205
HF620-110-4	215		50	245
HF620-132-4	265		70	300
HF620-160-4	330		95	410
HF620-185-4	365		95	410
HF620-220-4	438		120	475
HF620-250-4	485		150	620
HF620-280-4	545		70*2	620
HF620-315-4	610		95*2	620
HF620-355-4	668		120*2	2*410
HF620-400-4	720		120*2	2*410
HF620-450-4	820		150*2	2*475

4.8

		2%		1%	
HF620-0R4-4	0.4 kW	2.2A	6.4 mH	2.2A	3.2mH
HF620-0R7-4	0.7 kW	4A	3.5 mH	4A	1.8 mH
HF620-1R5-4	1.5 kW	6A	2.4 mH	6A	1.2 mH
HF620-2R2-4	2.2 kW	7A	2.0 mH	7A	1.0 mH
HF620-3R7-4	3.7 kW	12A	1.1 mH	12A	0.6 mH
HF620-5R5-4	5.5kW	19A	743uH	19A	371 uH
HF620-7R5-4	7.5kW	22A	644 uH	22A	322 uH
HF620-011-4	11kW	28A	493 uH	28A	247 uH
HF620-015-4	15kW	38A	368 uH	38A	184 uH
HF620-018-4	18.5kW	49A	283 uH	49A	141 uH
HF620-022-4	22kW	57A	247 uH	57A	123 uH
HF620-030-4	30kW	76A	184 uH	76A	92 uH
HF620-037-4	37kW	88A	159 uH	88A	79 uH
HF620-045-4	45kW	113A	123 uH	113A	62 uH
HF620-055-4	55kW	131A	106 uH	131A	53 uH
HF620-075-4	75kW	178A	78 uH	178A	39 uH
HF620-090-4	90kW	227A	62 uH	227A	31 uH
HF620-110-4	110kW	259A	54 uH	259A	27 uH
HF620-132-4	132kW	320A	44 uH	320A	22 uH
HF620-160-4	160kW	398A	35 uH	398A	18 uH

HF620-185-4	185kW	446A	31 uH	446A	16 uH
HF620-220-4	220kW	528A	26 uH	528A	13 uH
HF620-250-4	250kW	573A	24 uH	573A	12 uH
HF620-280-4	280KW	657A	21 uH	657A	11 uH
HF620-315-4	315kW	735A	19 uH	735A	10 uH
HF620-355-4	355kW	805A	17 uH	805A	9 uH
HF620-400-4	400kW	856A	16 uH	856A	8 uH
HF620-450-4	K 450kW	856A	16 uH	856A	8 uH

J

4.9

				KW	KW
		Ω	Ω	30% Kc	50% Kc
HF620-0R4-4	0.4 kW	750	115	≥ 0.2	≥ 0.3
HF620-0R7-4	0.7 kW	750	115	≥ 0.2	≥ 0.35
HF620-1R5-4	1.5 kW	400	100	≥ 0.5	≥ 0.7
HF620-2R2-4	2.2 kW	250			

HF620-037-4	37kW	21	20	≥ 12	≥ 16
HF620-045-4	45kW	13	8	≥ 15	≥ 20
HF620-055-4	55kW	10	8	≥ 20	≥ 26
HF620-075-4	75kW	7.5	6	≥ 26	≥ 35
HF620-090-4	90kW	6.8	3.5	≥ 29	≥ 38
HF620-110-4	110kW	5.1	3.5	≥ 38	≥ 50
HF620-132-4	132kW	4.2	3.5	≥ 46	≥ 60
HF620-160-4	160kW	3.6	2.5	≥ 54	≥ 71
HF620-185-4	185kW	3.3	2.5	≥ 59	≥ 78

1 185kW

100%

2 Kc

3 Kc

a 20

Kc=10% - 20%

b

Kc=30%

c

Kc=40 - 50%

4

4.10 EMC

1 EMC

EMC

electromagnetic compatibility

EMC

EMC

EMC

EMC

EMC

2

EMC



EMC

a

b

PWM

c

d

3

EMC

EMC

π

I

U

M

" I

U

EMC

" "

5

EMC

,

W "

a

J

Ð

4

"

M

"

I

U

ori



adC


20cm

90

5.

5.1

LOCAL/REMOTE F2 FOREARD/REVERSE RUN STOP F1 ESC
ENTER /RESET

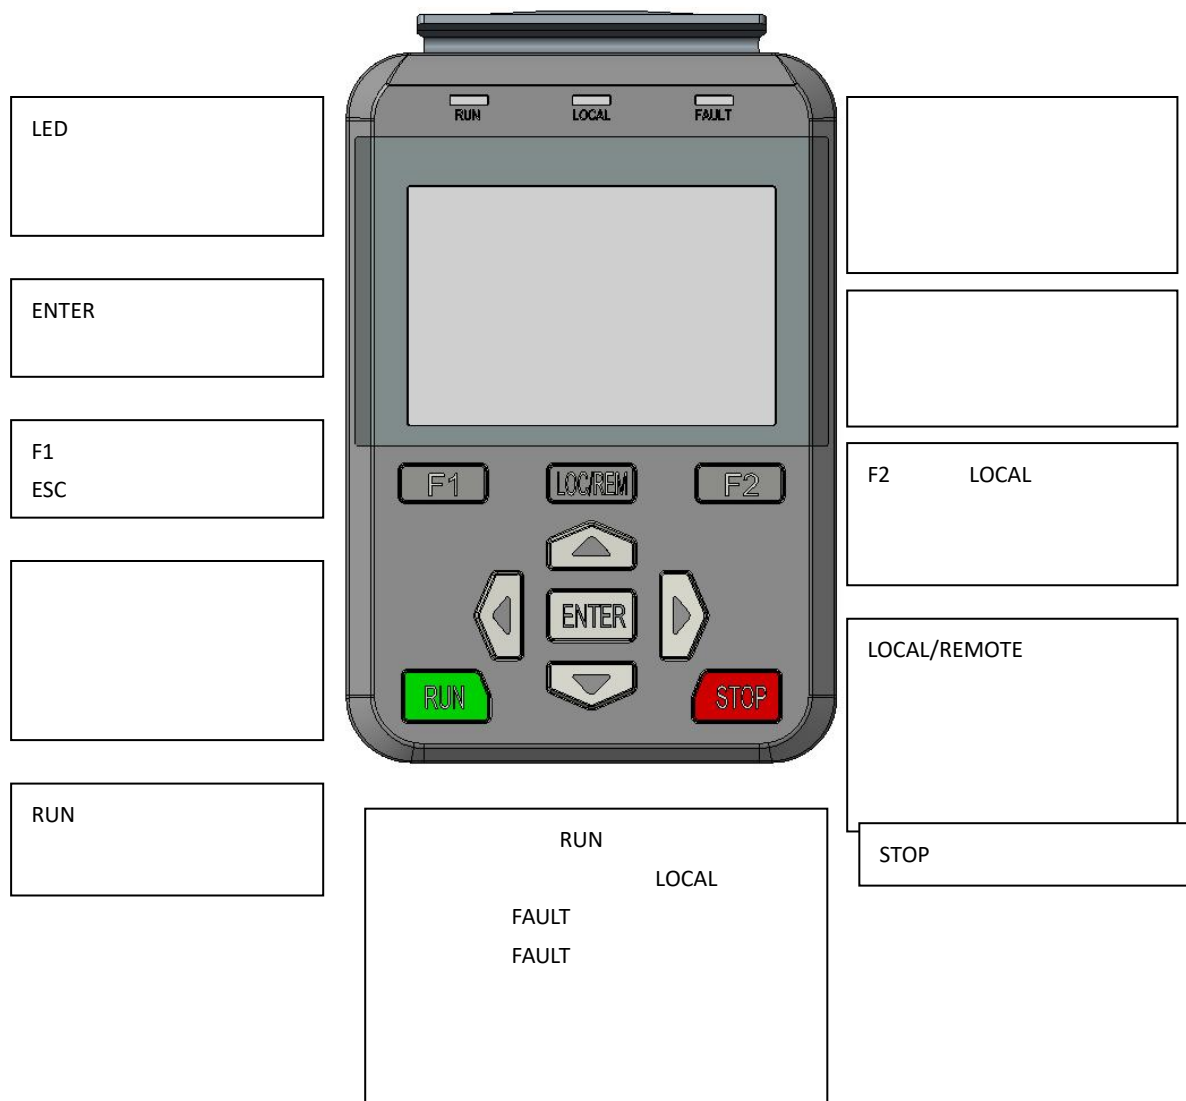

5.2



5.3


0.0	HZ	HZ
0.0	A	A
0.0	V	V
0.		
0.0	V	V
MON		
REFST		
FUNC		
PAR		



5.4

1 Drive Monitor

(I/O)

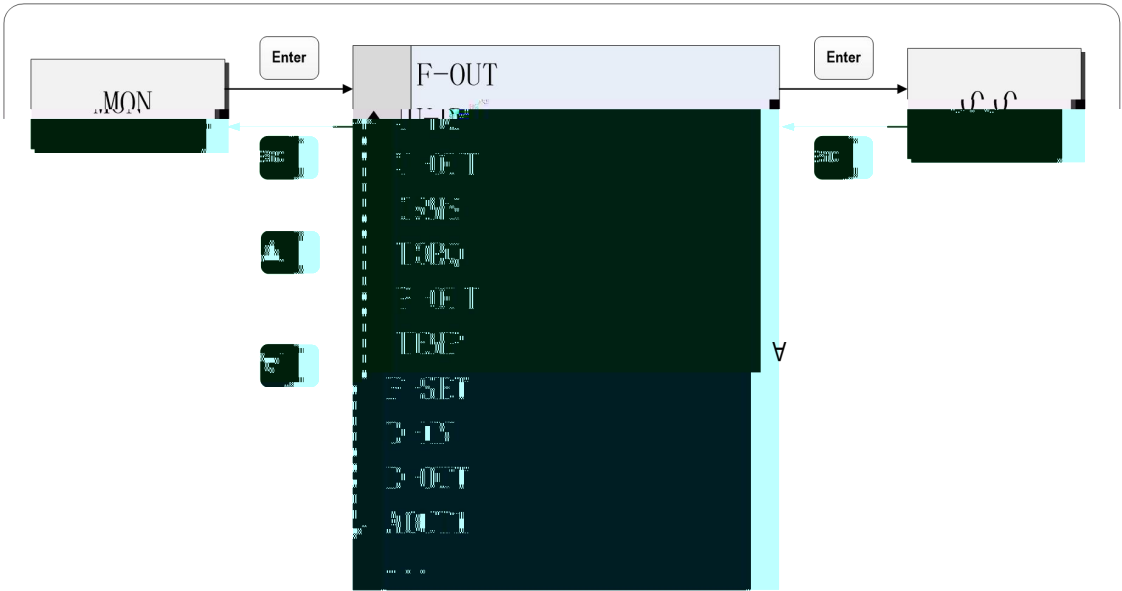


F-OUT	[Hz]	Hz	
V-DC		V	
V-OUT		V	
IRMS		A	
TORQ		%	
P-OUT		kW	
TEMP			IGBT
F-SET	[Hz]	Hz	
D-IN			
D-OUT			
AOU			

MON

	PUL1L	1		1
	PUL1H	1		1
	PUL2L	2		2
	PUL2H	2		2
	TC- IN			

2

REFST

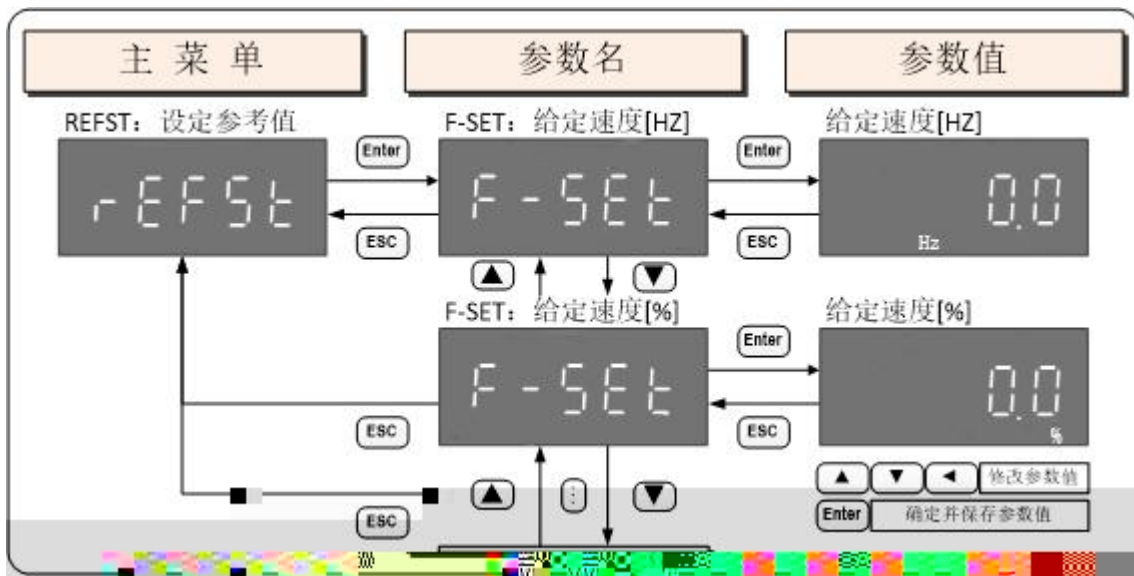

REFST	F-SET		[Hz]	Hz
	F-SET		[%]	%
	T-SET		[%]	%
	TLIM		[%]	%
	A1SET	1	[%]	1
	A2SET	2	[%]	2



FUNC	F.CODE		
	F.RST		
	F.HIS		
	F.CLR		
	SY.RST		
	DATE		
	DR.VER		
	PD.VER		

F.CODE

5

ESC

F.RST

ENTER

YES ?

ENTER

DONE

ESC

CANCE.

F.HIS

ENTER

SY.RST

ENTER


YES ?

ENTER

WAIT.

DONE

CANCE.

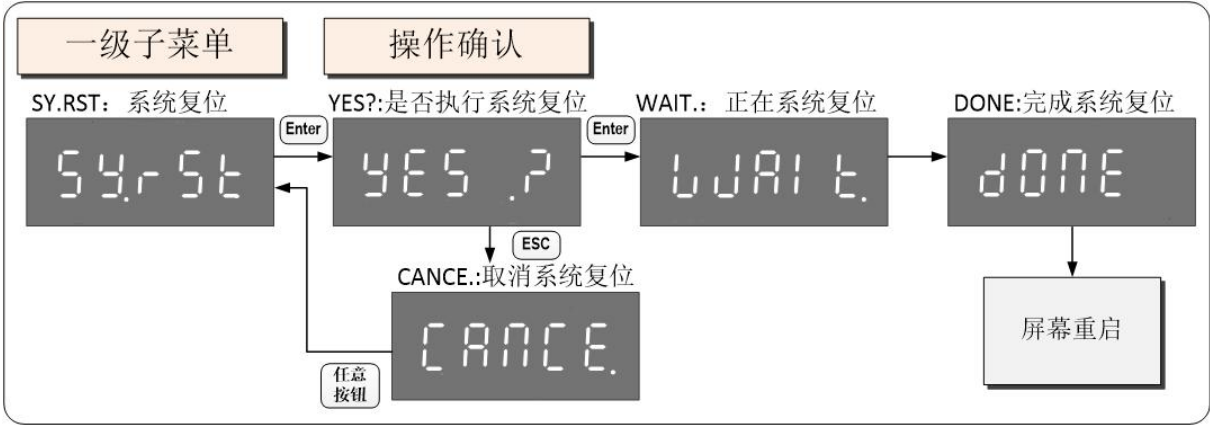


DATE

ENTER

ENTER

ENTER

DATE	Y . 20XX		20XX
	MO . XX		XX
	DAY . XX		XX
	XXXX .		MON . TUES . WED . THUR . FRI . SAT . SUN .
	H . XX		XX
	M . XX		XX
	S . XX		XX

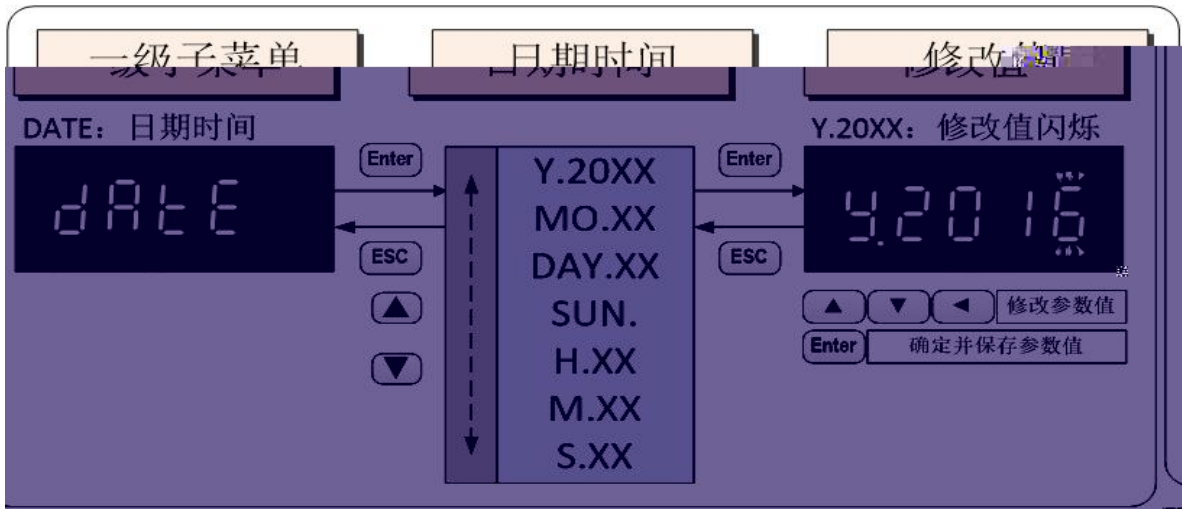


DR.VER

ENTER

VX.XX

5

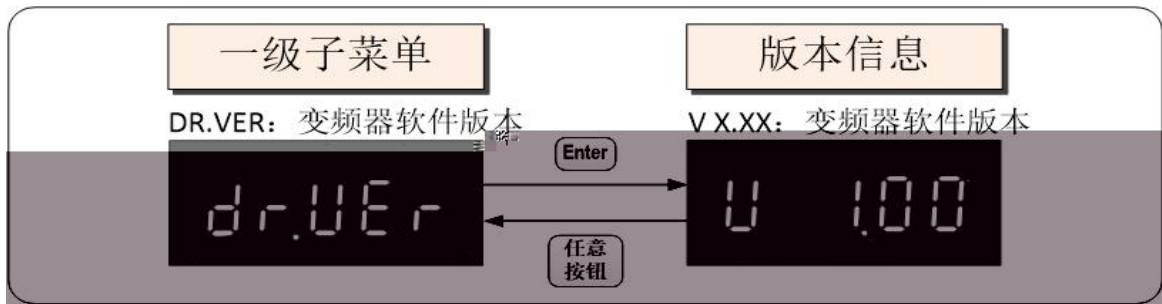


PD.VER

ENTER

VX.XX

5

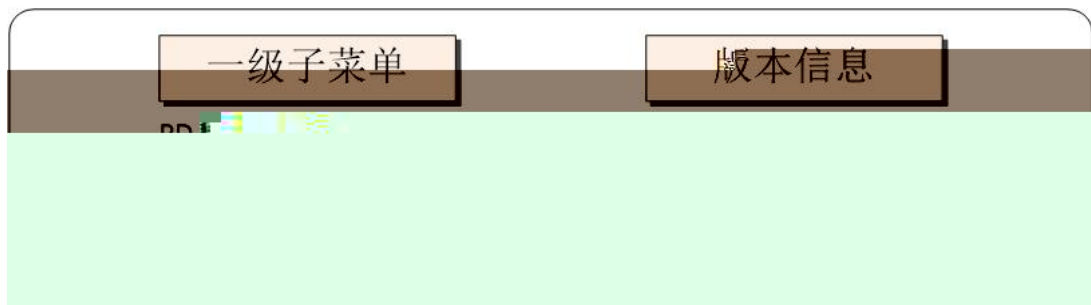

4

PAR

PAR


1

2

3

4

ENTER

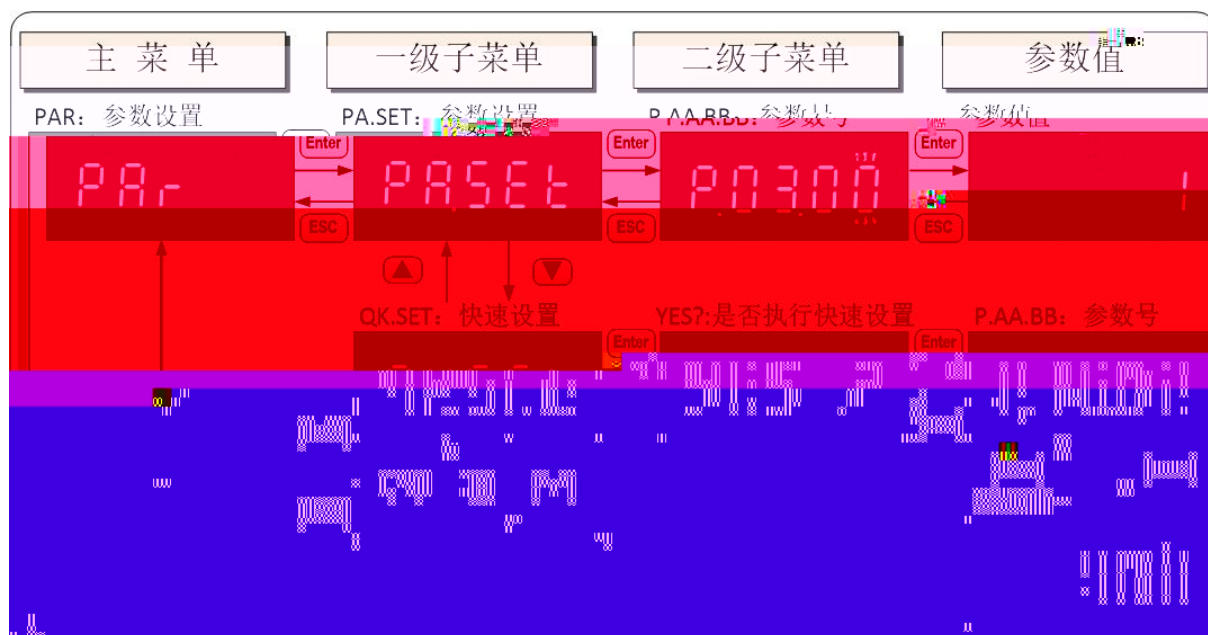

PAR	PA.SET		PASW.
	QK.SET		
	PA.INI		
	TUNE.1		
	TUNE.2		
	TUNE.3		
	TUNE.4	AFE	AFE
	PASW.		
	P.LOCK		


PA.SET

ENTER

“ P.AA.BB ”

AA

BB



ENTER



QK.SET	P.16.04	
	P.16.05	
	P.16.06	
	P.16.07	
	P.16.09	
	P.16.11	
	P.16.14	V/F
	P.16.24	
	P.08.16	1
	P.08.35	1
	P.08.00	
	P.08.10	
	P.08.03	
	P.07.00	[1]
	P.07.04	[1]
	P.07.19	[1]

PA.INI

ENTER


“ P.---- ”

“ WAIT. ”

“ DONE ”

“ FAULT ”

ESC

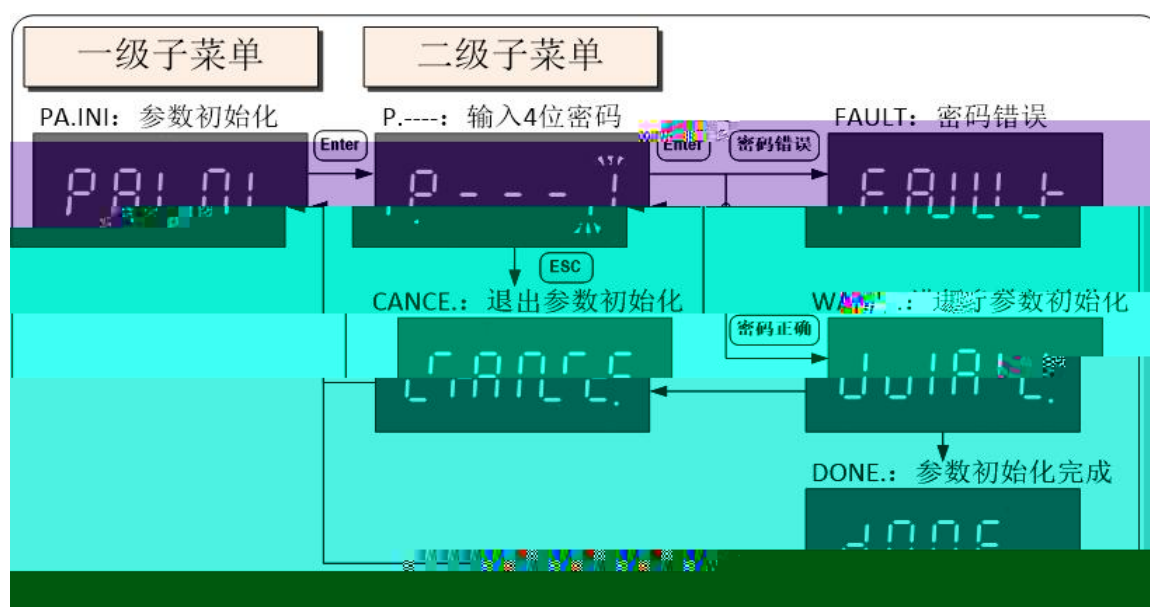

TUNE.1 TUNE.2 TUNE.3 TUNE.4

(AFE)

“ TUNE.X ”

ENTER

“ TX.PRC. ”

“ TX-OK ”

“ YES ? ”

ENTER

“ TX.PRC. ”

“ TX.PRC. ”

ESC

ENTER

“ TX.PRC. ”


“ TX-OK ”

TUNE.1



PASW.

PA.SET

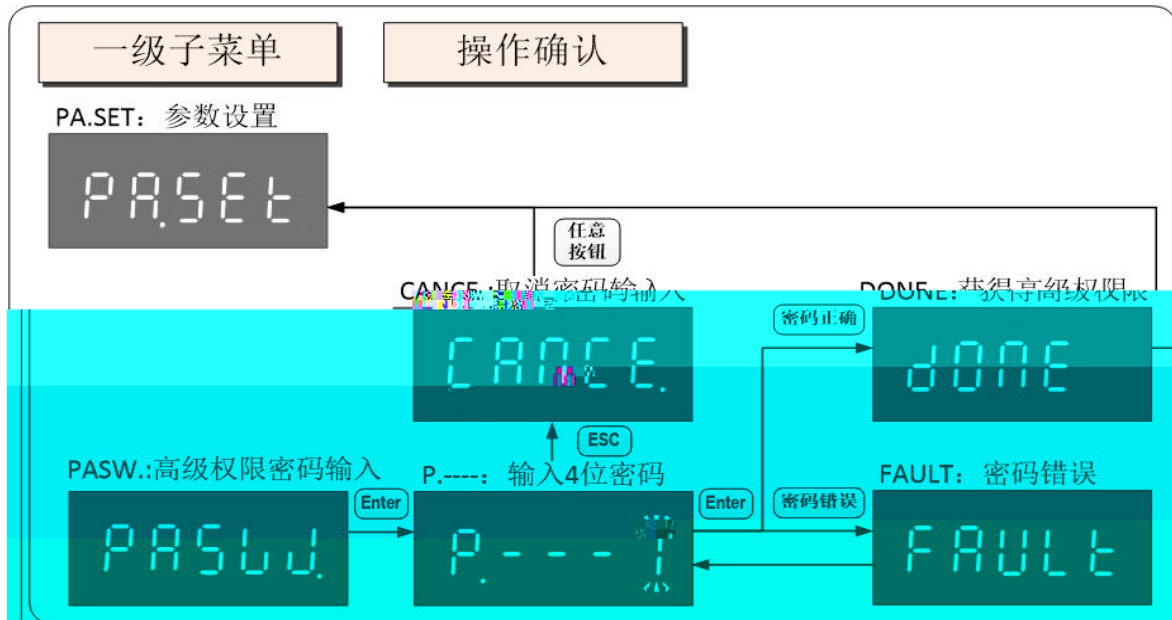

P.LOCK

ENTER

PA.SET



5 Warning and Error

“ RESET ”


“ ESC ”

15

RESET


“ F.CODE ”

XXX

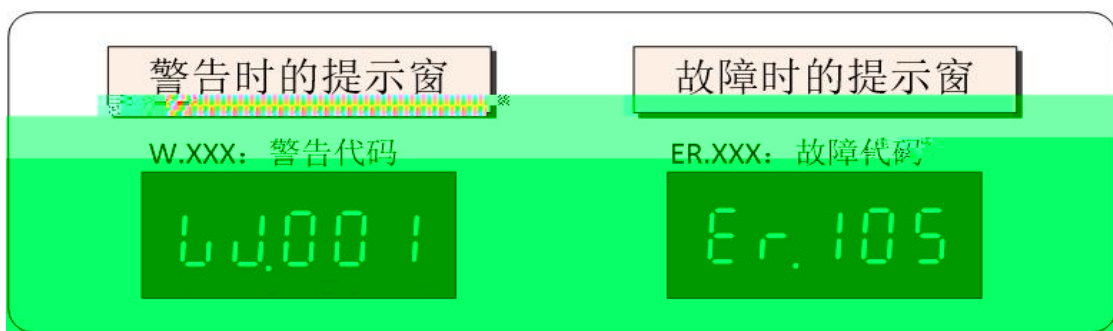

6.

6.1

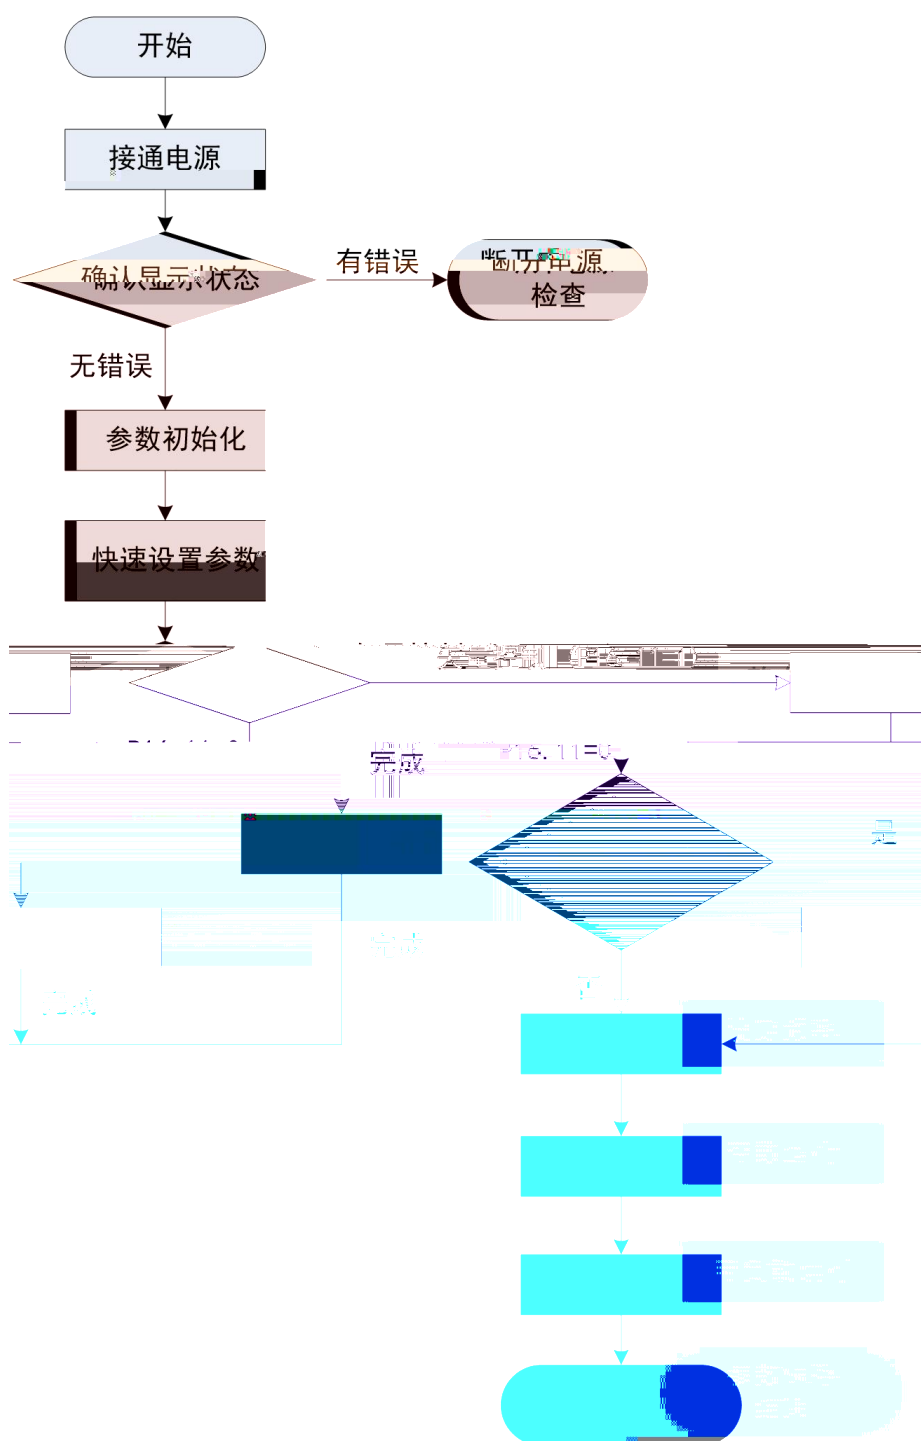

/

V/F	P16.11=0	V/F
	P16.11=2	P16.11=1

6.2

6.2.1

1		AC380~480V 50/60Hz
2	U, V, W	
3		
4	PG	PG
5		

6.2.2



6.2.3

5.4 “ ”

6.2.4

P16.2			
P16.3			
P16.4			
P16.5			
P16.6			
P16.7		120 × P16.5 / P16.6	
P16.9		120 × P16.5/P16.7	
P16.11		[0]V/F [1] [2]	0
P16.14	V/F	[0] V/F [1] V/F [2]	0
P16.24		V/F	50 [Hz]
P8.16	1	P8.15	3
P8.35	1	P8.34	3
P8.0		[0] [1] [2]DP [3]MODBUS [4]	1
P8.10		[0] I/O [1] 1 [2] 2 [3] [4]DP [5]MODBUS [6]	3

P8.3			[0] [1]	1
P7.0		1]	0~300[%]	180%
P7.4		1]	0~300[%]	235%
P7.19		1]	100.0 720.0[%]	120%

6.2.5

1

3

6.2.6

HF620

	7.5%
	50%50%
	1/5
	P16
	V/F


6.2.7

1

2LOC/REMLocal Local

3ENTER[1]RUN

RUN5Hz

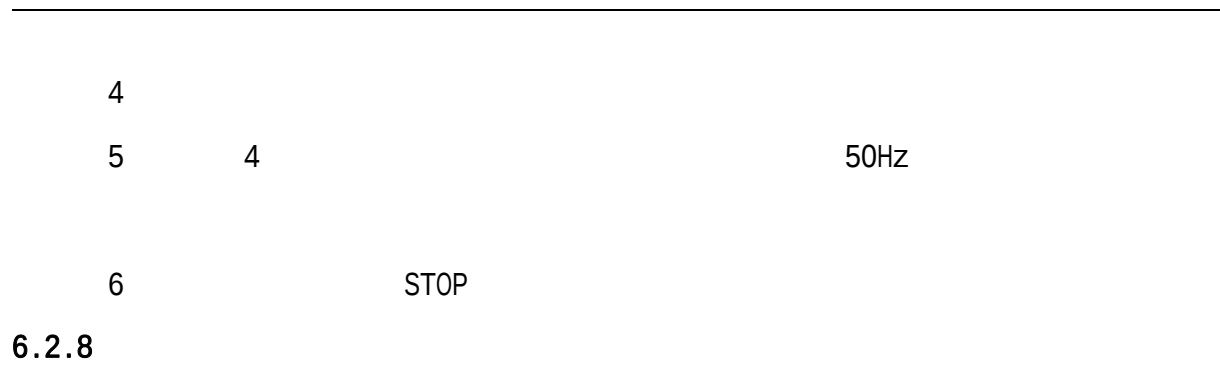

6.2.9

7.

7.1 P0

P0.0		[0] [1]	0 1	0	
P0.1			0 27	14	
P0.3		[0]50HZ [1]60HZ	0 1	0	
P0.4					

7.2 P2

P2.0		[0] [1] [2]	0 2	0	8.1
P2.1		[0] [1]DP	0 1	0	
P2.2		[0] [1]	0 1	0	
P2.3			0 5	1	
P2.33			1 100min	10	10min

7.3 P3

P3.0	1		0 32	1	
P3.1	2		0 32	2	
P3.2	3		0 32	5	
P3.3	4		0 32	6	



19	AFE	
20		AFE
21	FUNC 21	
22		8.2
23		8.10
24		
25	FUNC 28	
26		
27	FUNC 27	
28		8.10
29 64	FUNC 29 FUNC 64	

7.4

P4

P4.0	1		0 64	0	
P4.1	2		0 64	0	
P4.2	3		0 64	0	
P4.3	4		0 64	0	
P4.4	5		0 64	0	
P4.16	1		0 500	0	
P4.17	2		0 500	0	
P4.18	3		0 500	0	
P4.19	4		0 500	0	

0		
1		8.3
2		ON
3		8.3
4		
5		
6	1	[6] [9]
7	2	
8	3	
9	4	
10	FUNC 10	
11		
12		
13		
14		
15		
16		8.8
17	0	1

18	1	2
19	2	3
20	3	4
21 31	FUNC 21 FUNC 31	
32		AFE
33 48	FUNC 33 FUNC 48	
49	PROFIBUS 1	PROFIBUS 1 1
50	PROFIBUS 2	PROFIBUS 2 1
51	PROFIBUS 3	PROFIBUS 3 1
52	PROFIBUS 4	PROFIBUS 4 1
53	PROFIBUS 5	PROFIBUS 5 1
54 56	FUNC 54 FUNC 56	
57	1	1 1
58	2	2 1
59	3	3 1
60	4	4 1
61	1	1 1
62	2	2 1
63	3	3 1
64	4	4 1

7.5

P5

P5.0	AI1	[0] [1]0 +10V [2]-10 +10V [3]0 20mA	0 3	1	
P5.1	AI1	AI1	0.0 1000.0 [ms]	25.0 [ms]	
P5.2	AI1	AI1	-10.00 10.00 [V]	0.000 [V]	8.4
P5.3	AI1	AI1	-20.00 20.00 [mA]	0.000 [mA]	8.4
P5.4	AI1	AI1	-10.00 10.00 [V]	0.000 [V]	8.4
P5.5	AI1	AI1	0.00 20.00 [mA]	0.000 [mA]	8.4
P5.6	AI1	AI1	-300.0 300.0 [%]	0.0 [%]	8.4
P5.7	AI1	AI1	-10.00 10.00 [V]	10.000 [V]	8.4
P5.8	AI1	AI1	0.00 20.00 [mA]	20.000 [mA]	8.4
P5.9	AI1	AI1	-300.0 300.0 [%]	100.0 [%]	8.4
P5.18	AI2	[0] [1]0 +10V [2]-10 +10V [3]0 20mA	0 3	3	

		A12			
P5.19	A12		0.0 1000.0 [ms]	25.0 [ms]	
P5.20	A12	A12	-10.00 10.00 [V]	0.000 [V]	
P5.21	A12	A12	-20.00 20.00 [mA]	0.000 [mA]	
P5.22	A12	A12	-10.00 10.00 [V]	0.000 [V]	
P5.23	A12	A12	0.00 20.00 [mA]	0.000 [mA]	
P5.24	A12	A12	-300.0 300.0 [%]	0.0 [%]	
P5.25	A12	A12	-10.00 10.00 [V]	10.000 [V]	
P5.26	A12	A12	0.00 20.00 [mA]	20.000 [mA]	
P5.27	A12	A12	-300.0 300.0 [%]	100.0 [%]	

7.6

P6

P6.0	A01	7-1	0 14	2	
P6.2	A01	A01	-300.0 300.0 [%]	0.0 [%]	8.5
P6.3	A01	A01	-300.0 300.0 [%]	100.0 [%]	8.5
P6.4	A01 [mA V]	A01	0.0 100.0 [%]	0.0 [%]	8.5
P6.5	A01 [mA V]	A01	0.0 100.0 [%]	100.0 [%]	8.5
P6.6	A01	A01	-100.00 100.00 [%]	0.00 [%]	
P6.7	A01	A01 (P6.0 [13])	0.0 100.0 [%]	0.0 [%]	
P6.8	A01	A01	0.0 1000.0 [ms]	10.0 [ms]	
P6.14	A02	7-1	0 14	4	
P6.16	A02	A02	-300.0 300.0 [%]	0.0 [%]	
P6.17	A02	A02	-300.0 300.0 [%]	100.0 [%]	
P6.18	A02 [mA V]	A02	0.0 100.0 [%]	0.0 [%]	
P6.19	A02 [mA V]	A02	0.0 100.0 [%]	100.0 [%]	
P6.20	A02	A02	-100.00 100.00 [%]	0.00 [%]	
P6.21	A02	A02 (P6.14 [13])	0.0 100.0 [%]	0.0 [%]	

P6.22	A02	A01	0.0 1000.0 [ms]	10.0 [ms]	
-------	-----	-----	--------------------	--------------	--

7-1

0		
1		
2		
3		
4		
5		
6		
7		
8	(%)	()
9		
10		
11	(%)	(150)
12	DP	Profibus
13		P6.7 P6.21
14		

7.7

P7

P7.0	[1]	1	0.0 300.0 [%]	180.0 [%]	8.6
P7.1	[2]	2	0.0 300.0 [%]	180.0 [%]	8.6
P7.2	[3]	3	0.0 300.0 [%]	180.0 [%]	8.6
P7.3	[4]	4	0.0 300.0 [%]	180.0 [%]	8.6
P7.4	[1]	1	0.0 300.0 [%]	235.0 [%]	8.6
P7.5	[2]	2	0.0 300.0 [%]	235.0 [%]	8.6
P7.6	[3]	3	0.0 300.0 [%]	235.0 [%]	8.6
P7.7	[4]	4	0.0 300.0 [%]	235.0 [%]	8.6
P7.8	[1]	1	0.0 100.0 [%]	20.0 [%]	8.6
P7.9	[2]	2	0.0 100.0 [%]	20.0 [%]	8.6
P7.10	[3]	3	0.0 100.0 [%]	20.0 [%]	8.6
P7.11	[4]	4	0.0 100.0 [%]	20.0 [%]	8.6
P7.12			600 820 [V]	800 [V]	8.6
P7.13	. 8 . 8				

P7.22	[4]	4	100.0 720.0 [%]	120.0 [%]	8.6
P7.23	1 M1	1	0.00 3.00 [s]	0.50 [s]	8.6
P7.24	1 M2	2	0.00 3.00 [s]	0.50 [s]	8.6
P7.25	1 M3	3	0.00 3.00 [s]	0.50 [s]	8.6
P7.26	1 M4	4	0.00 3.00 [s]	0.50 [s]	8.6
P7.27	1	1	0.00 3.00 [s]	2.00 [s]	
P7.28	2	2	0.00 3.00 [s]	2.00 [s]	
P7.29	3	3	0.00 3.00 [s]	2.00 [s]	
P7.30	4	4	0.00 3.00 [s]	2.00 [s]	
P7.31			0.0 100.0 [%]	25.0 [%]	
P7.32			0.00 5.00 [s]	1 [s]	
P7.33			0.0 1000.0 [s]	360.0 [s]	
P7.47			0.0 300.0 [%]	100.0 [%]	8.6
P7.48	1	1	0.0 300.0 [%]	150.0 [%]	8.6
P7.49	1	1	0.00 60.00 [s]	60.00 [s]	8.6
P7.50	2	2	0.0 300.0 [%]	200.0 [%]	8.6
P7.51	2	2	0.00 5.00 [s]	5.00 [s]	8.6
P7.55		[0] [1]	0 1	0	
P7.56			0.0 200.0 [%]	120.0 [%]	
P7.57			0.0 12.0 [s]	5 [s]	
P7.59		[0] [1]	0 1	1	

P7.60			0.10 3.00 [s]	0.30 [s]	
P7.64		[0] [1]	0 1	0	8.6
P7.65			-25 150 [V]	50 [V]	8.6
P7.66			-25 150 [V]	100 [V]	8.6
P7.69		[0] [1]	0 1	0	8.6
P7.70			-25 150 [V]	100 [V]	8.6
P7.71	1	[0] [1]	0 1	0	8.6
P7.73		[0] [1]	0 1	0	
P7.74			300 500 [V]	460 [V]	
P7.75			0.0 1000.0 [%]	100.0 [%]	
P7.76			0.00 300.00 [s]	1.00 [s]	
P7.77			0.0 200.0 [%]	15.0 [%]	
P7.94		[0] [1]	0 1	1	
P7.95		AFE	0.0 3000.0 [s]	15.0 [s]	
P7.96			0.00 300.00 [s]	0.00 [s]	

7.8 1 P8

P8.0		[0] [1] [2]DP [3]MODBUS [4]	0 4	0	
P8.3		[0] [1]	0 1	0	8.7
P8.6			0.00 300.00 [s]	0.00 [s]	8.7
P8.7			0.00 300.00 [s]	0.00 [s]	8.7
P8.10		[0] I/O [1] 1 [2] 2 [3] [4]DP [5]MODBUS [6]	0 6	0	
P8.15	1		0.0 300.0 [%]	100.0 [%]	8.7
P8.16	1	P8.15	0.0 300.0 [s]	3.00 [s]	8.7
P8.17	2		0.0 300.0 [%]	200.0 [%]	8.7
P8.18	2	P8.15 P8.17	0.0 300.0 [s]	4.00 [s]	8.7
P8.19	3		0.0 300.0 [%]	240.0 [%]	8.7
P8.20	3	P8.17 P8.19	0.0 300.0 [s]	7.00 [s]	8.7
P8.21	4		0.0 300.0 [%]	300.0 [%]	8.7
P8.22	4	P8.19 P8.21	0.0 300.0 [s]	10.00 [s]	8.7



P8.42	5		0.0 300.0 [%]	300.0 [%]	8.7
P8.43	5	P8.40 P8.42	0.0 300.0 [s]	10.00 [s]	8.7
P8.44	6		0.0 300.0 [%]	300.0 [%]	8.7
P8.45	6	P8.42 P8.44	0.0 300.0 [s]	10.00 [s]	8.7
P8.46	7		0.0 300.0 [%]	300.0 [%]	8.7
P8.47	7	P8.44 P8.46	0.0 300.0 [s]	10.00 [s]	8.7
P8.48	8		0.0 300.0 [%]	300.0 [%]	8.7
P8.49	8	P8.46 P8.48	0.0 300.0 [s]	10.00 [s]	8.7
P8.53		[0] [1]	0 1	0	8.7
P8.54			0.0 300.0 [%]	0.0 [%]	8.7
P8.55		[0] [1]	0 1	0	8.7
P8.56			0.00 300.00 [s]	1.50 [s]	8.7
P8.57		[0] [1]	0 1	1	
P8.58			0.00 300.00 [s]	1.50 [s]	

P9.23	5		0.0 300.0 [%]	300.0 [%]	8.7
P9.24	5	P9.21 P9.23	0.0 300.0 [s]	10.00 [s]	8.7
P9.25	6		0.0 300.0 [%]	300.0 [%]	8.7
P9.26	6	P9.23 P9.25	0.0 300.0 [s]	10.00 [s]	8.7
P9.27	7		0.0 300.0 [%]	300.0 [%]	8.7
P9.28	7	P9.25 P9.27	0.0 300.0 [s]	10.00 [s]	8.7
P9.29	8		0.0 300.0 [%]	300.0 [%]	8.7
P9.30	8	P9.27 P9.29	0.0 300.0 [s]	10.00 [s]	8.7
P9.32		[0] [1]PROFIBUS [2]MODBUS [3]	0 3	0	8.7
P9.33			0.1 10.0	1.0	8.7
P9.34	1		0.0 300.0 [%]	100.0 [%]	8.7
P9.35	1	P9.34	0.0 300.0 [s]	3.00 [s]	8.7
P9.36	2		0.0 300.0 [%]	200.0 [%]	8.7
P9.37	2	P9.34 P9.36	0.0 300.0 [s]	4.00 [s]	8.7
P9.38	3		0.0 300.0 [%]	240.0 [%]	8.7
P9.39	3	P9.36 P9.38	0.0 300.0 [s]	7.00 [s]	8.7
P9.40	4		0.0 300.0 [%]	300.0 [%]	8.7
P9.41	4	P9.38 P9.40	0.0 300.0 [s]	10.00 [s]	8.7

P9.42	5		0.0 300.0 [%]	300.0 [%]	8.7
P9.43	5	P9.40 P9.42	0.0 300.0 [s]	10.00 [s]	8.7
P9.44	6		0.0 300.0 [%]	300.0 [%]	8.7
P9.45	6	P9.42 P9.44	0.0 300.0 [s]	10.00 [s]	8.7
P9.46	7		0.0 300.0 [%]	300.0 [%]	8.7
P9.47	7	P9.44 P9.46	0.0 300.0 [s]	10.00 [s]	8.7
P9.48	8		0.0 300.0 [%]	300.0 [%]	8.7
P9.49	8	P9.46 P9.48	0.0 300.0 [s]	10.00 [s]	8.7
P8.53		[0] [1]	0 1	0	8.7
P8.54			0.0 300.0 [%]	0.0 [%]	8.7
P8.55		[0] [1]	0 1	0	8.7
P8.56			0.00 300.00 [s]	1.50 [s]	8.7
P9.57		[0] [1]	0 1	1	
P9.58			0.00 300.00 [s]	1.50 [s]	

7.10 3 P10

P10.0		[0] [1] [2]DP [3]MODBUS [4]	0 4	0	
P10.3		[0] [1]	0 1	0	8.7
P10.6			0.00 300.00 [s]	0.00 [s]	8.7
P10.7			0.00 300.00 [s]	0.00 [s]	8.7
P10.10		[0] I/O [1] 1 [2] 2 [3] [4]DP [5]MODBUS [6]	0 6	0	
P10.15	1		0.0 300.0 [%]	100.0 [%]	8.7
P10.16	1	P10.15	0.0 300.0 [s]	3.00 [s]	8.7
P10.17	2		0.0 300.0 [%]	200.0 [%]	8.7
P10.18	2	P10.15 P10.17	0.0 300.0 [s]	4.00 [s]	8.7
P10.19	3		0.0 300.0 [%]	240.0 [%]	8.7
P10.20	3	P10.17 P10.19	0.0 300.0 [s]	7.00 [s]	8.7
P10.21	4		0.0 300.0 [%]	300.0 [%]	8.7
P10.22	4	P10.19 P10.21	0.0 300.0 [s]	10.00 [s]	8.7

P10.23	5			0.0	300.0	300.0	8.7
					[%]	[%]	
P10.24	5	P10.21	P10.23	0.0	300.0		
					[s]		

P10.42	5		0.0 300.0 [%]	300.0 [%]	8.7
P10.43	5	P10.40 P10.42	0.0 300.0 [s]	10.00 [s]	8.7
P10.44	6		0.0 300.0 [%]	300.0 [%]	8.7
P10.45	6	P10.42 P10.44	0.0 300.0 [s]	10.00 [s]	8.7
P10.46	7		0.0 300.0 [%]	300.0 [%]	8.7
P10.47	7	P10.44 P10.46	0.0 300.0 [s]	10.00 [s]	8.7
P10.48	8		0.0 300.0 [%]	300.0 [%]	8.7
P10.49	8	P10.46 P10.48	0.0 300.0 [s]	10.00 [s]	8.7
P8.53		[0] [1]	0 1	0	8.7
P8.54			0.0 300.0 [%]	0.0 [%]	8.7
P8.55		[0] [1]	0 1	0	8.7
P8.56			0.00 300.00 [s]	1.50 [s]	8.7
P10.57		[0] [1]	0 1	1	
P10.58			0.00 300.00 [s]	1.50 [s]	

7.11

4

P11

P11.23

5

0.0 300.0

P11.42	5		0.0 300.0 [%]	300.0 [%]	8.7
P11.43	5	P11.40 P11.42	0.0 300.0 [s]	10.00 [s]	8.7
P11.44	6		0.0 300.0 [%]	300.0 [%]	8.7
P11.45	6	P11.42 P11.44	0.0 300.0 [s]	10.00 [s]	8.7
P11.46	7		0.0 300.0 [%]	300.0 [%]	8.7
P11.47	7	P11.44 P11.46	0.0 300.0 [s]	10.00 [s]	8.7
P11.48	8		0.0 300.0 [%]	300.0 [%]	8.7
P11.49	8	P11.46 P11.48	0.0 300.0 [s]	10.00 [s]	8.7
P8.53		[0] [1]	0 1	0	8.7
P8.54			0.0 300.0 [%]	0.0 [%]	8.7
P8.55		[0] [1]	0 1	0	8.7
P8.56			0.00 300.00 [s]	1.50 [s]	8.7
P11.57		[0] [1]	0 1	1	
P11.58			0.00 300.00 [s]	1.50 [s]	

7.12 1 P12

P12.0		[0] [1]	0 1	1	8.8
P12.1		[0] [%] [1] [Hz] [2] [rpm]	0 2	1	
P12.2	1		0.0 3000.0	10.0	
P12.3	2		0.0 3000.0	20.0	
P12.4	3		0.0 3000.0	35.0	
P12.5	4		0.0 3000.0	50.0	
P12.6	5		0.0 3000.0	50.0	
P12.7	6		0.0 3000.0	50.0	
P12.8	7		0.0 3000.0	50.0	
P12.9	8		0.0 3000.0	50.0	
P12.10	9		0.0 3000.0	50.0	
P12.11	10		0.0 3000.0	50.0	
P12.12	11		0.0 3000.0	50.0	
P12.13	12		0.0 3000.0	50.0	
P12.14	13		0.0 3000.0	50.0	
P12.15	14		0.0 3000.0	50.0	
P12.16	15		0.0 3000.0	50.0	
P12.17	16		0.0 3000.0	50.0	
P12.22			0.0 20.0 [%]	2.0 [%]	8.8
P12.23			0.0 20.0 [%]	0.0 [%]	8.8
P12.24			0.0 200.0 [%]	30.0 [%]	8.8
P12.25			0.0 200.0 [%]	20.0 [%]	8.8
P12.26			0.00 2.00 [s]	0.00 [s]	8.8

P12.27			0.00 2.00 [s]	0.00 [s]	8.8
P12.28			0.00 2.00 [s]	0.07 [s]	8.8
P12.29			0.00 2.00 [s]	0.07 [s]	8.8
P12.32			0.0 20.0 [%]	0.0 [%]	8.8
P12.33			0.0 20.0 [%]	0.0 [%]	8.8
P12.34			0.00 2.00 [s]	0.00 [s]	8.8
P12.35			0.00 2.00 [s]	0.00 [s]	8.8
P12.36			0.00 2.00 [s]	0.50 [s]	8.8
P12.37			0.00 2.00 [s]	0.50 [s]	8.8
P12.38		[0] [1]	0 1	0	8.8
P12.40			0.0 100.0 [%]	0.5 [%]	8.8
P12.41			0.00 100.00 [s]	0.20 [s]	8.8
P12.42			0 3000 [s]	300 [s]	8.8
P12.43			0.0 50.0 [%]	20.0 [%]	8.8
P12.44			0 5 [s]	0.20 [s]	8.8
P12.45			20.0 100.0 [%]	25.0 [%]	8.8
P12.46			0 5 [s]	0.10 [s]	8.8
P12.47			0 30.0 [%]	10.0 [%]	8.8

P12.48			0 5 [s]	0 [s]	8.8
P12.49			0~1.0	0.1	8.8
P12.50			0.0 10.0 [%]	3.0 [%]	8.8

7.13 2 P13

P13.0		[0] [1]	0 1	1	8.8
P13.1		[0] [%] [1] [Hz] [2] [rpm]	0 2	1	
P13.2	1		0.0 3000.0	10.0	
P13.3	2		0.0 3000.0	20.0	
P13.4	3		0.0 3000.0	35.0	
P13.5	4		0.0 3000.0	50.0	
P13.6	5		0.0 3000.0	50.0	
P13.7	6		0.0 3000.0	50.0	
P13.8	7		0.0 3000.0	50.0	
P13.9	8		0.0 3000.0	50.0	
P13.10	9		0.0 3000.0	50.0	
P13.11	10		0.0 3000.0	50.0	
P13.12	11		0.0 3000.0	50.0	
P13.13	12		0.0 3000.0	50.0	
P13.14	13		0.0 3000.0	50.0	
P13.15	14		0.0 3000.0	50.0	
P13.16	15		0.0 3000.0	50.0	
P13.17	16		0.0 3000.0	50.0	
P13.22			0.0 20.0 [%]	2.0 [%]	8.8
P13.23			0.0 20.0 [%]	0.0 [%]	8.8

P13.24	0.0	200.0	30.0	8.8
	[%]		[%]	
P13.25	0.0	200.0	20.0	8.8
	[%]		[%]	
P13.26	0.00	2.00	0.00	8.8
	[s]		[s]	
P13.27	0.00	2.00		
	[s]			

P13.45			20.0 100.0 [%]	25.0 [%]	8.8
P13.46			0 5 [s]	0.10 [s]	8.8
P13.47			0 30.0 [%]	10.0 [%]	8.8
P13.48			0 5 [s]	0 [s]	8.8
P13.49			0~1.0	0.1	8.8
P13.50			0.0 10.0 [%]	3.0 [%]	8.8

7.14 3 P14

P14.0	100 00	[0]    	300.0 Y	T 0	8.8
		[1]	0 1	1	
		[0] [%]	5		
P14.1		[1] [Hz]	0 2	1	
		[2] [rpm]			
P14.2	1		0.0 3000.0	10.0	
P14.3					

30

P14.17	16		0.0 3000.0	50.0	
P14.22			0.0 20.0 [%]	2.0 [%]	8.8
P14.23			0.0 20.0 [%]	0.0 [%]	8.8
P14.24			0.0 200.0 [%]	30.0 [%]	8.8
P14.25			0.0 200.0 [%]	20.0 [%]	8.8
P14.26			0.00 2.00 [s]	0.00 [s]	8.8
P14.27			0.00 2.00 [s]	0.00 [s]	8.8
P14.28			0.00 2.00 [s]	0.07 [s]	8.8
P14.29			0.00 2.00 [s]	0.07 [s]	8.8
P14.32			0.0 20.0 [%]	0.0 [%]	8.8
P14.33			0.0 20.0 [%]	0.0 [%]	8.8
P14.34			0.00 2.00 [s]	0.00 [s]	8.8
P14.35			0.00 2.00 [s]	0.00 [s]	8.8
P14.36			0.00 2.00 [s]	0.50 [s]	8.8
P14.37			0.00 2.00 [s]	0.50 [s]	8.8
P14.38		[0] [1]	0 1	0	8.8
P14.40			0.0 100.0 [%]	0.5 [%]	8.8
P14.41			0.00 100.00 [s]	0.20 [s]	8.8
P14.42			0 3000 [s]	300 [s]	8.8

P15.41			0.00 100.00 [s]	0.20 [s]	8.8
P15.42			0 3000 [s]	300 [s]	8.8
P15.43			0.0 50.0 [%]	20.0 [%]	8.8
P15.44			0 5 [s]	0.20 [s]	8.8
P15.45			20.0 100.0 [%]	25.0 [%]	8.8
P15.46			0 5 [s]	0.10 [s]	8.8
P15.47			0 30.0 [%]	10.0 [%]	8.8
P15.48			0 5 [s]	0 [s]	8.8
P15.49			0~1.0	0.1	8.8
P15.50			0.0 10.0 [%]	3.0 [%]	8.8

7.16 1 V/F P16

P16.0			320 460 [V]	380 [V]	
P16.2			0.0 4000.0 [kW]	[kW]	
P16.3			320 460 [V]	380 [V]	
P16.4			0.0 6500.0 [A]	[A]	
P16.5			0.0 300.0 [Hz]	50.0 [Hz]	
P16.6			0 6000 [rpm]	1465 [rpm]	
P16.7			2 12 [pole]	4 [pole]	8.9
P16.9			0 7200 [rpm]	1500 [rpm]	8.9

P16.11		[0]V/F [1] [2] [3] [4]	0 4	0	
P16.12			1.00 10.00 [kHz]	3.00 [kHz]	8.9
P16.14	V/F	[0] V/F [1] V/F [2]	0 3	0	8.9
P16.15		[0] [1]	0 1	0	8.9
P16.16			2 500 [ms]	500 [ms]	
P16.17	V/F	[0] [1]	0 1	0	
P16.18			10 1000 [ms]	200 [ms]	
P16.19		[0] [1]	0 1	0	
P16.22			0.00 100.00 [s]	0.00 [s]	8.9
P16.23		V/F	0.00 300.00 [Hz]	0.00 [Hz]	
P16.24		V/F	0.00 300.00 [Hz]	50.00 [Hz]	
P16.25			0.0 120.0 [%]	100.0 [%]	
P16.26	V/F	V/F	0.00 10.00 [%]	0.75 [%]	8.9
P16.27			0.0 200.0 [%]	100.0 [%]	8.9
P16.30			0.0 100.0 [%]	0.0 [%]	8.9
P16.33	V/F	V/F	0 6	2	8.9
P16.34	V/F 1		0.0 300.0 [Hz]	5.0 [Hz]	
P16.35	V/F 1		0.0 125.0 [%]	11.5 [%]	
P16.36	V/F 2		0.0 300.0 [Hz]	50.0 [Hz]	

P16.37	V/F	2		0.0 125.0 [%]	100.0 [%]	
P16.38	V/F	3		0.0 300.0 [Hz]	50.0 [Hz]	
P16.39	V/F	3		0.0 125.0 [%]	100.0 [%]	
P16.40	V/F	4		0.0 300.0 [Hz]	50.0 [Hz]	
P16.41	V/F	4		0.0 125.0 [%]	100.0 [%]	
P16.42	V/F	5		0.0 300.0 [Hz]	50.0 [Hz]	
P16.43	V/F	5		0.0 125.0 [%]	100.0 [%]	
P16.44	V/F	6		0.0 300.0 [Hz]	50.0 [Hz]	
P16.45	V/F	6		0.0 125.0 [%]	100.0 [%]	
P16.48			[0] [1]PID 1 [2]PID 2 [3]	0 3	0	
P16.50				0.00 300.00 [s]	0.00 [s]	8.9
P16.51				0.0 150.0 [%]	70.0 [%]	8.9
P16.52				0.00 5.00 [Hz]	0.00 [Hz]	8.9
P16.54				0.00 300.00 [s]	0.00 [s]	8.9
P16.55				0.0 150.0 [%]	75.0 [%]	8.9
P16.56				0.00 5.00 [Hz]	0.00 [Hz]	8.9
P16.59				0.0 1000.0 [%]	100.0 [%]	
P16.60				0.0 1000.0 [%]	100.0 [%]	
P16.61				0.0 1000.0 [%]	100.0 [%]	
P16.62				0.0 1000.0 [%]	100.0 [%]	
P16.64	V/F		V/F	0.0 1000.0 [%]	100.0 [%]	8.9

P16.66		V/F	0.0 1000.0 [%]	100.0 [%]	
P16.67			0.0 1000.0 [%]	100.0 [%]	
P16.68			0.0 1000.0 [%]	100.0 [%]	
P16.69			0.0 1000.0 [%]	100.0 [%]	
P16.70			0.0 1000.0 [%]	100.0 [%]	

7.17 2 V/F P17

P17.0			320 460 [V]	380 [V]	
P17.2			0.0 4000.0 [kW]	[kW]	
P17.3			320 460 [V]	380 [V]	
P17.4			0.0 6500.0 [A]	[A]	
P17.5			0.0 300.0 [Hz]	50.0 [Hz]	
P17.6			0 6000 [rpm]	1465 [rpm]	
P17.7			2 12 [pole]	4 [pole]	8.9
P17.9			0 7200 [rpm]	1500 [rpm]	8.9
P17.11		[0]V/F [1] [2] [3] [4]	0 4	0	
P17.12			1.00 10.00 [kHz]	3.00 [kHz]	8.9
P17.14	V/F	[0] V/F [1] V/F [2]	0 3	0	8.9
P17.15		[0] [1]	0 1	0	8.9
P17.16			2 500 [ms]	500 [ms]	
P17.17	V/F	[0] [1]	0 1	0	
P17.18			10 1000 [ms]	200 [ms]	
P17.19		[0] [1]	0 1	0	

P17.22			0.00 100.00 [s]	0.00 [s]	8.9
P17.23		V/F	0.00 300.00 [Hz]	0.00 [Hz]	
P17.24		V/F	0.00 300.00 [Hz]	50.00 [Hz]	
P17.25			0.0 120.0 [%]	100.0 [%]	
P17.26	V/F	V/F	0.00 10.00 [%]	0.75 [%]	8.9
P17.27			0.0 200.0 [%]	100.0 [%]	8.9
P17.30			0.0 100.0 [%]	0.0 [%]	8.9
P17.33	V/F	V/F	0 6	2	8.9
P17.34	V/F 1		0.0 300.0 [Hz]	5.0 [Hz]	
P17.35	V/F 1		0.0 125.0 [%]	11.5 [%]	
P17.36	V/F 2		0.0 300.0 [Hz]	50.0 [Hz]	
P17.37	V/F 2		0.0 125.0 [%]	100.0 [%]	
P17.38	V/F 3		0.0 300.0 [Hz]	50.0 [Hz]	
P17.39	V/F 3		0.0 125.0 [%]	100.0 [%]	
P17.40	V/F 4		0.0 300.0 [Hz]	50.0 [Hz]	
P17.41	V/F 4		0.0 125.0 [%]	100.0 [%]	
P17.42	V/F 5		0.0 300.0 [Hz]	50.0 [Hz]	
P17.43	V/F 5		0.0 125.0 [%]	100.0 [%]	
P17.44	V/F 6		0.0 300.0 [Hz]	50.0 [Hz]	
P17.45	V/F 6		0.0 125.0 [%]	100.0 [%]	
P17.48		[0] [1]PID 1 [2]PID 2 [3]	0 3	0	

P17.50			0.00 300.00 [s]	0.00 [s]	8.9
P17.51			0.0 150.0 [%]	70.0 [%]	8.9
P17.52			0.00 5.00 [Hz]	0.00 [Hz]	8.9
P17.54			0.00 300.00 [s]	0.00 [s]	8.9
P17.55			0.0 150.0 [%]	75.0 [%]	8.9
P17.56			0.00 5.00 [Hz]	0.00 [Hz]	8.9
P17.59			0.0 1000.0 [%]	100.0 [%]	
P17.60			0.0 1000.0 [%]	100.0 [%]	
P17.61			0.0 1000.0 [%]	100.0 [%]	
P17.62			0.0 1000.0 [%]	100.0 [%]	
P17.64	V/F	V/F	0.0 1000.0 [%]	100.0 [%]	8.9
P17.66		V/F	0.0 1000.0 [%]	100.0 [%]	
P17.67			0.0 1000.0 [%]	100.0 [%]	
P17.68			0.0 1000.0 [%]	100.0 [%]	
P17.69			0.0 1000.0 [%]	100.0 [%]	
P17.70			0.0 1000.0 [%]	100.0 [%]	

7.18 3 V/F P18

P18.0			320 460 [V]	380 [V]	
P18.2			0.0 4000.0 [kW]	[kW]	
P18.3			320 460 [V]	380 [V]	
P18.4			0.0 6500.0 [A]	[A]	
P18.5			0.0 300.0 [Hz]	50.0 [Hz]	
P18.6			0 6000 [rpm]	1465 [rpm]	
P18.7			2 12 [pole]	4 [pole]	8.9
P18.9			0 7200 [rpm]	1500 [rpm]	8.9
P18.11		[0]V/F [1] [2] [3] [4]	0 4	0	
P18.12			1.00 10.00 [kHz]	3.00 [kHz]	8.9
P18.14	V/F	[0] V/F [1] V/F [2]	0 3	0	8.9
P18.15		[0] [1]	0 1	0	8.9
P18.16			2 500 [ms]	500 [ms]	
P18.17	V/F	[0] [1]	0 1	0	
P18.18			10 1000 [ms]	200 [ms]	
P18.19		[0] [1]	0 1	0	

P18.22			0.00	100.00	0.00	
			[s]		[s]	
P18.23		V/F	0.00	300.0	0.00	
			[Hz]		[Hz]	
P18.24		V/F	0.00	300.0	0.00	
			[Hz]		[Hz]	
P18.25			0.0	120.0	0.0	
			[%]		[%]	
P18.26	V/F	V/F	0.00	10.00	5	8.9
			[%]			
P18.27			0.0	200.0		8.9
			[%]			
P18.30			0.0	100.0	0.	
			[%]		[%]	
P18.33	V/F	V/F	0	6	2	
P18.34	V/F	1	0.0	300.0	5.0	
			[Hz]		[Hz]	
P18.35	V/F	1	0.0	125.0	11.5	
			[%]		[%]	
P18.36	V/F	2	0.0	300.0	50.0	
			[Hz]		[Hz]	
P18.37	V/F	2	0.0	125.0	100.0	
			[%]		[%]	
P18.38	V/F	3	0.0	300.0	50.0	
			[Hz]		[Hz]	
P18.39	V/F	3	0.0	125.0	100.0	
			[%]		[%]	
P18.40	V/F	4	0.0	300.0	50.0	
			[Hz]		[Hz]	
P18.41	V/F	4	0.0	125.0	100.0	
			[%]		[%]	
P18.42	V/F	5	0.0	300.0	50.0	
			[Hz]		[Hz]	
P18.43	V/F	5	0.0	125.0	100.0	
			[%]		[%]	
P18.44	V/F	6	0.0	300.0	50.0	
			[Hz]		[Hz]	
P18.45	V/F	6	0.0	125.0	100.0	
			[%]		[%]	
		[0]				
P18.48		[1]PID	1			
		[2]PID	2	0	3	0
		[3]				

P18.50			0.00 300.00 [s]	0.00 [s]	8.9
P18.51			0.0 150.0 [%]	70.0 [%]	8.9
P18.52			0.00 5.00 [Hz]	0.00 [Hz]	8.9
P18.54			0.00 300.00 [s]	0.00 [s]	8.9
P18.55			0.0 150.0 [%]	75.0 [%]	8.9
P18.56			0.00 5.00 [Hz]	0.00 [Hz]	8.9
P18.59			0.0 1000.0 [%]	100.0 [%]	
P18.60			0.0 1000.0 [%]	100.0 [%]	
P18.61			0.0 1000.0 [%]	100.0 [%]	
P18.62			0.0 1000.0 [%]	100.0 [%]	
P18.64	V/F	V/F	0.0 1000.0 [%]	100.0 [%]	8.9
P18.66		V/F	0.0 1000.0 [%]	100.0 [%]	
P18.67			0.0 1000.0 [%]	100.0 [%]	
P18.68			0.0 1000.0 [%]	100.0 [%]	
P18.69			0.0 1000.0 [%]	100.0 [%]	
P18.70			0.0 1000.0 [%]	100.0 [%]	

7.19 4 V/F P19

P19.0			320 460 [V]	380 [V]	
P19.2			0.0 4000.0 [kW]	[kW]	
P19.3			320 460 [V]	380 [V]	
P19.4			0.0 6500.0 [A]	[A]	
P19.5			0.0 300.0 [Hz]	50.0 [Hz]	
P19.6			0 6000 [rpm]	1465 [rpm]	
P19.7			2 12 [pole]	4 [pole]	8.9
P19.9			0 7200 [rpm]	1500 [rpm]	8.9
P19.11		[0]V/F [1] [2] [3] [4]	0 4	0	
P19.12			1.00 10.00 [kHz]	3.00 [kHz]	8.9
P19.14	V/F	[0] V/F [1] V/F [2]	0 3	0	8.9
P19.15		[0] [1]	0 1	0	8.9
P19.16			2 500 [ms]	500 [ms]	
P19.17	V/F	[0] [1]	0 1	0	
P19.18			10 1000 [ms]	200 [ms]	
P19.19		[0] [1]	0 1	0	

P19.22			0.00 100.00 [s]	0.00 [s]	8.9
P19.23		V/F	0.00 300.00 [Hz]	0.00 [Hz]	
P19.24		V/F	0.00 300.00 [Hz]	50.00 [Hz]	
P19.25			0.0 120.0 [%]	100.0 [%]	
P19.26	V/F	V/F	0.00 10.00 [%]	0.75 [%]	8.9
P19.27			0.0 200.0 [%]	100.0 [%]	8.9
P19.30			0.0 100.0 [%]	0.0 [%]	8.9
P19.33	V/F	V/F	0 6	2	8.9
P19.34	V/F 1		0.0 300.0 [Hz]	5.0 [Hz]	
P19.35	V/F 1		0.0 125.0 [%]	11.5 [%]	
P19.36	V/F 2		0.0 300.0 [Hz]	50.0 [Hz]	
P19.37	V/F 2		0.0 125.0 [%]	100.0 [%]	
P19.38	V/F 3		0.0 300.0 [Hz]	50.0 [Hz]	
P19.39	V/F 3		0.0 125.0 [%]	100.0 [%]	
P19.40	V/F 4		0.0 300.0 [Hz]	50.0 [Hz]	
P19.41	V/F 4		0.0 125.0 [%]	100.0 [%]	
P19.42	V/F 5		0.0 300.0 [Hz]	50.0 [Hz]	
P19.43	V/F 5		0.0 125.0 [%]	100.0 [%]	
P19.44	V/F 6		0.0 300.0 [Hz]	50.0 [Hz]	
P19.45	V/F 6		0.0 125.0 [%]	100.0 [%]	
P19.48		[0] [1]PID 1 [2]PID 2 [3]	0 3	0	

P19.50			0.00 300.00 [s]	0.00 [s]	8.9
P19.51			0.0 150.0 [%]	70.0 [%]	8.9
P19.52			0.00 5.00 [Hz]	0.00 [Hz]	8.9
P19.54			0.00 300.00 [s]	0.00 [s]	8.9
P19.55			0.0 150.0 [%]	75.0 [%]	8.9
P19.56			0.00 5.00 [Hz]	0.00 [Hz]	8.9
P19.59			0.0 1000.0 [%]	100.0 [%]	
P19.60			0.0 1000.0 [%]	100.0 [%]	
P19.61			0.0 1000.0 [%]	100.0 [%]	
P19.62			0.0 1000.0 [%]	100.0 [%]	
P19.64	V/F	V/F	0.0 1000.0 [%]	100.0 [%]	8.9
P19.66		V/F	0.0 1000.0 [%]	100.0 [%]	
P19.67			0.0 1000.0 [%]	100.0 [%]	
P19.68			0.0 1000.0 [%]	100.0 [%]	
P19.69			0.0 1000.0 [%]	100.0 [%]	
P19.70			0.0 1000.0 [%]	100.0 [%]	

7.20 1 P20

P20.0		[0] [1]	0 1	0	8.10
P20.1		[0] [1] 1 [2] 2 [3] [4] P20.3 [5]DP [6]MODBUS [7]	0 7	0	8.10
P20.2			0 7	0	
P20.3			-300.0 300.0 [%]	0.0 [%]	8.10
P20.5			0 1000 [ms]	0 [ms]	
P20.6			0.0 200.0 [%]	100.0 [%]	8.10
P20.7		[0] [1] P20.8 P20.9 [2] 1 [3] 2 [4] [5]DP [6]MODBUS [7]	0 7	0	8.10
P20.8		P20.7 [1]	0.0 300.0 [%]	200.0 [%]	8.10
P20.9		P20.7 [1]	0.0 300.0 [%]	200.0 [%]	8.10
P20.11			0 1000 [ms]	0 [ms]	
P20.13			20.0 500.0 [ms]	100.0 [ms]	8.10
P20.14		1	0 60000	1024	

P20.15		[0] [1]	0 1	0	8.10
P20.16			0.0 300.0 [%]	100.0 [%]	
P20.17			0.0 300.0 [%]	100.0 [%]	
P20.18			0.0 300.0 [%]	0.0 [%]	
P20.19			0.0 300.0 [%]	0.0 [%]	
P20.20		[0] [1]	0 1	0	
P20.21		[0] [1]	0 1	0	
P20.22			0.0 300.0 [%]	160.0 [%]	
P20.23			0.0 200.0 [%]	20.0 [%]	
P20.24			0.0 300.0 [%]	100.0 [%]	
P20.25			0.0 200.0 [%]	100.0 [%]	
P20.26			0.0 1000.0 [%]	0.0 [%]	8.10
P20.27			0.00 15.00 [%]	2.00 [%]	8.10
P20.28		[0] P20.16 P20.17 [1] [2] [3]DP	0 3	0	
P20.30		[0] P20.32 [1] 1 [2] 2 [3]	P20.31 0 3	0	
P20.31			0.0 100.0 [%]	5.0 [%]	
P20.32			0.0 100.0 [%]	5.0 [%]	

P20.34		[0] [1]	0 1	0	8.10
P20.35			0.0 100.0 [s]	0.0 [s]	
P20.36			50.0 150.0 [%]	110.0 [%]	
P20.37			0.0 150.0 [%]	100.0 [%]	8.10
P20.38			0.0 100.0 [%]	25.0 [%]	8.10
P20.39			0.0 120.0 [%]	100.0 [%]	8.10
P20.40			0.0 150.0 [%]	100.0 [%]	8.10
P20.41			0.0 150.0 [%]	135.0 [%]	
P20.42		[0] [1]	0 1	1	
P20.43			25 1000 [ms]	75 [ms]	
P20.44			25 1000 [ms]	250 [ms]	
P20.45			0.0 100.0 [%]	22.0 [%]	
P20.46			0.0 100.0 [%]	18.0 [%]	
P20.47			0.0 200.0 [%]	92.0 [%]	
P20.48			0.0 200.0 [%]	87.0 [%]	
P20.49			0.0 150.0 [%]	100.0 [%]	
P20.51			0.0 1000.0 [%]	100.0 [%]	
P20.52			0.0 1000.0 [%]	100.0 [%]	
P20.53	Kp		0.0 1000.0 [%]	100.0 [%]	
P20.54	Ki		0.0 1000.0 [%]	100.0 [%]	

P20.55			0.0 1000.0 [%]	100.0 [%]	8.10
P20.56			0.0 1000.0 [%]	100.0 [%]	8.10
P20.60	DROOP	0 DROOP	0.0 100.0 [%]	0.0 [%]	8.10
P20.61	DROOP	DROOP	30 2000 [ms]	50 [ms]	8.10
P20.62			0.0 1000.0 [%]	100.0 [%]	8.10
P20.63			0.0 1000.0 [%]	100.0 [%]	8.10
P20.64	2	2	0.0 100.0 [%]	0.0 [%]	8.10
P20.65	2	2	30 2000.0 ms	50 ms	
P20.98		()	0.01 300.00 [s]	0.75 [s]	
P20.99			0.00 10.00 [%]	0.00 [%]	

7.21 2 P21

P21.0		[0] [1]	0 1	0	8.10
P21.1		[0] [1] 1 [2] 2 [3] [4] P21.3 [5]DP [6]MODBUS [7]	0 7	0	8.10
P21.2			0 7	0	
P21.3			-300.0 300.0 [%]	0.0 [%]	8.10
P21.5			0 1000 [ms]	0 [ms]	
P21.6			0.0 200.0 [%]	100.0 [%]	8.10
P21.7		[0] [1] P21.8 P21.9 [2] 1 [3] 2 [4] [5]DP [6]MODBUS [7]	0 7	0	8.10
P21.8		P21.7 [1]	0.0 300.0 [%]	200.0 [%]	8.10
P21.9		P21.7 [1]	0.0 300.0 [%]	200.0 [%]	8.10
P21.11			0 1000 [ms]	0 [ms]	
P21.13			20.0 500.0 [ms]	100.0 [ms]	8.10
P21.14		1	0 60000	1024	

P21.15		[0] [1]	0 1	0	8.10
P21.16			0.0 300.0 [%]	100.0 [%]	
P21.17			0.0 300.0 [%]	100.0 [%]	
P21.18			0.0 300.0 [%]	0.0 [%]	
P21.19			0.0 300.0 [%]	0.0 [%]	
P21.20		[0] [1]	0 1	0	
P21.21		[0] [1]	0 1	0	
P21.22			0.0 300.0 [%]	160.0 [%]	
P21.23			0.0 200.0 [%]	20.0 [%]	
P21.24			0.0 300.0 [%]	100.0 [%]	
P21.25			0.0 200.0 [%]	100.0 [%]	
P21.26			0.0 1000.0 [%]	0.0 [%]	8.10
P21.27			0.00 15.00 [%]	2.00 [%]	8.10
P21.28		[0] P21.16 P21.17 [1] [2] [3]DP	0 3	0	
P21.30		[0] P21.32 [1] 1 [2] 2 [3]	P21.31 0 3	0	
P21.31			0.0 100.0 [%]	5.0 [%]	
P21.32			0.0 100.0 [%]	5.0 [%]	

P21.34		[0] [1]	0 1	0	8.10
P21.35			0.0 100.0 [s]	0.0 [s]	
P21.36			50.0 150.0 [%]	110.0 [%]	
P21.37			0.0 150.0 [%]	100.0 [%]	8.10
P21.38			0.0 100.0 [%]	25.0 [%]	8.10
P21.39			0.0 120.0 [%]	100.0 [%]	8.10
P21.40			0.0 150.0 [%]	100.0 [%]	8.10
P21.41			0.0 150.0 [%]	135.0 [%]	
P21.42		[0] [1]	0 1	1	
P21.43			25 1000 [ms]	75 [ms]	
P21.44			25 1000 [ms]	250 [ms]	
P21.45			0.0 100.0 [%]	22.0 [%]	
P21.46			0.0 100.0 [%]	18.0 [%]	
P21.47			0.0 200.0 [%]	92.0 [%]	
P21.48			0.0 200.0 [%]	87.0 [%]	
P21.49			0.0 150.0 [%]	100.0 [%]	
P21.51			0.0 1000.0 [%]	100.0 [%]	
P21.52			0.0 1000.0 [%]	100.0 [%]	
P21.53	Kp		0.0 1000.0 [%]	100.0 [%]	
P21.54	Ki		0.0 1000.0 [%]	100.0 [%]	

P21.55			0.0 1000.0 [%]	100.0 [%]	8.10
P21.56			0.0 1000.0 [%]	100.0 [%]	8.10
P21.60	DROOP	0 DROOP	0.0 100.0 [%]	0.0 [%]	8.10
P21.61	DROOP	DROOP	30 2000 [ms]	50 [ms]	8.10
P21.62			0.0 1000.0 [%]	100.0 [%]	8.10
P21.63			0.0 1000.0 [%]	100.0 [%]	8.10
P21.64	2	2	0.0 100.0 [%]	0.0 [%]	8.10
P21.65	2	2	30 2000.0 ms	50 ms	
P21.98		()	0.01 300.00 [s]	0.75 [s]	
P21.99			0.00 10.00 [%]	0.00 [%]	

7.22 3 P22

P22.0		[0] [1]	0 1	0	8.10
P22.1		[0] [1] 1 [2] 2 [3] [4] P22.3 [5]DP [6]MODBUS [7]	0 7	0	8.10
P22.2			0 7	0	
P22.3			-300.0 300.0 [%]	0.0 [%]	8.10
P22.5			0 1000 [ms]	0 [ms]	
P22.6			0.0 200.0 [%]	100.0 [%]	8.10
P22.7		[0] [1] P22.8 P22.9 [2] 1 [3] 2 [4] [5]DP [6]MODBUS [7]	0 7	0	8.10
P22.8		P22.7 [1]	0.0 300.0 [%]	200.0 [%]	8.10
P22.9		P22.7 [1]	0.0 300.0 [%]	200.0 [%]	8.10
P22.11			0 1000 [ms]	0 [ms]	
P22.13			20.0 500.0 [ms]	100.0 [ms]	8.10
P22.14		1	0 60000	1024	

P22.15		[0] [1]	0 1	0	8.10
P22.16			0.0 300.0 [%]	100.0 [%]	
P22.17			0.0 300.0 [%]	100.0 [%]	
P22.18			0.0 300.0 [%]	0.0 [%]	
P22.19			0.0 300.0 [%]	0.0 [%]	
P22.20		[0] [1]	0 1	0	
P22.21		[0] [1]	0 1	0	
P22.22			0.0 300.0 [%]	160.0 [%]	
P22.23			0.0 200.0 [%]	20.0 [%]	
P22.24			0.0 300.0 [%]	100.0 [%]	
P22.25			0.0 200.0 [%]	100.0 [%]	
P22.26			0.0 1000.0 [%]	0.0 [%]	8.10
P22.27			0.00 15.00 [%]	2.00 [%]	8.10
P22.28		[0] P22.16 P22.17 [1] [2] [3]DP	0 3	0	
P22.30		[0] P22.32 [1] 1 [2] 2 [3]	P22.31 0 3	0	
P22.31			0.0 100.0 [%]	5.0 [%]	
P22.32			0.0 100.0 [%]	5.0 [%]	

P22.34	[0]	0	1	0	8.10
	[1]				
P22.35		0.0	100.0	0.0	
		[s]		[s]	
P22.36		50.0	150.0	110.0	
		[%]		[%]	
P22.37		0.0	150.0	100.0	8.10
		[%]		[%]	
P22.38		0.0	100.0	25.0	8.10
		[%]		[%]	
P22.39		0.0	120.0	100.0	8.10
		[%]		[%]	
P22.40		0.0	150.0	100.0	8.10
		[%]		[%]	
P22.41		0.0	150.0	135.0	
		[%]		[%]	
P22.42	[0]	0	1	1	
	[1]				
P22.43		25	1000	75	
		[ms]		[ms]	
P22.44		25	1000	250	
		[ms]		[ms]	
P22.45		0.0	100.0	22.0	
		[%]		[%]	
P22.46		0.0	100.0	18.0	
		[%]		[%]	
P22.47					

P22.55			0.0 1000.0 [%]	100.0 [%]	8.10
P22.56			0.0 1000.0 [%]	100.0 [%]	8.10
P22.60	DROOP	0 DROOP	0.0 100.0 [%]	0.0 [%]	8.10
P22.61	DROOP	DROOP	30 2000 [ms]	50 [ms]	8.10
P22.62			0.0 1000.0 [%]	100.0 [%]	8.10
P22.63			0.0 1000.0 [%]	100.0 [%]	8.10
P22.64	2	2	0.0 100.0 [%]	0.0 [%]	8.10
P22.65	2	2	30 2000.0 ms	50 ms	
P22.98		()	0.01 300.00 [s]	0.75 [s]	
P22.99			0.00 10.00 [%]	0.00 [%]	

7.23 4 P23

P23.0		[0] [1]	0 1	0	8.10
P23.1		[0] [1] 1 [2] 2 [3] [4] P23.3 [5]DP [6]MODBUS [7]	0 7	0	8.10
P23.2			0 7	0	
P23.3			-300.0 300.0 [%]	0.0 [%]	8.10
P23.5			0 1000 [ms]	0 [ms]	
P23.6			0.0 200.0 [%]	100.0 [%]	8.10
P23.7		[0] [1] P23.8 P23.9 [2] 1 [3] 2 [4] [5]DP [6]MODBUS [7]	0 7	0	8.10
P23.8		P23.7 [1]	0.0 300.0 [%]	200.0 [%]	8.10
P23.9		P23.7 [1]	0.0 300.0 [%]	200.0 [%]	8.10
P23.11			0 1000 [ms]	0 [ms]	
P23.13			20.0 500.0 [ms]	100.0 [ms]	8.10
P23.14		1	0 60000	1024	

P23.15		[0] [1]	0 1	0	8.10
P23.16			0.0 300.0 [%]	100.0 [%]	
P23.17			0.0 300.0 [%]	100.0 [%]	
P23.18			0.0 300.0 [%]	0.0 [%]	
P23.19			0.0 300.0 [%]	0.0 [%]	
P23.20		[0] [1]	0 1	0	
P23.21		[0] [1]	0 1	0	
P23.22			0.0 300.0 [%]	160.0 [%]	
P23.23			0.0 200.0 [%]	20.0 [%]	
P23.24			0.0 300.0 [%]	100.0 [%]	
P23.25			0.0 200.0 [%]	100.0 [%]	
P23.26			0.0 1000.0 [%]	0.0 [%]	8.10
P23.27			0.00 15.00 [%]	2.00 [%]	8.10
P23.28		[0] P23.16 P23.17 [1] [2] [3]DP	0 3	0	
P23.30		[0] P23.32 [1] 1 [2] 2 [3]	P23.31 0 3	0	
P23.31			0.0 100.0 [%]	5.0 [%]	
P23.32			0.0 100.0 [%]	5.0 [%]	

P23.34	[0]	0	1	0	8.10
	[1]				
P23.35		0.0	100.0	0.0	
		[s]		[s]	
P23.36		50.0	150.0	110.0	
		[%]		[%]	
P23.37		0.0	150.0	100.0	8.10
		[%]		[%]	
P23.38		0.0	100.0	25.0	8.10
		[%]		[%]	
P23.39		0.0	120.0	100.0	8.10
		[%]		[%]	
P23.40		0.0	150.0	100.0	8.10
		[%]		[%]	
P23.41		0.0	150.0	135.0	
		[%]		[%]	
P23.42	[0]	0	1	1	
	[1]				
P23.43		25	1000	75	
		[ms]		[ms]	
P23.44		25	1000	250	
		[ms]		[ms]	
P23.45		0.0	100.0		
		[%]			

P23.55			0.0 1000.0 [%]	100.0 [%]	8.10
P23.56			0.0 1000.0 [%]	100.0 [%]	8.10
P23.60	DROOP	0 DROOP	0.0 100.0 [%]	0.0 [%]	8.10
P23.61	DROOP	DROOP	30 2000 [ms]	50 [ms]	8.10
P23.62			0.0 1000.0 [%]	100.0 [%]	8.10
P23.63			0.0 1000.0 [%]	100.0 [%]	8.10
P23.64	2	2	0.0 100.0 [%]	0.0 [%]	8.10
P23.65	2	2	30 2000.0 ms	50 ms	
P23.98		()	0.01 300.00 [s]	0.75 [s]	
P23.99			0.00 10.00 [%]	0.00 [%]	

7.24 MODBUS

P32

P32.0	MODBUS	[0] [1]	0 1	0	
P32.1	MODBUS ID		1 255	1	
P32.2		[0]RS485 [1]RS232	0 1	0	
P32.3		[0] 9600 BPS [1] 14400 BPS [2] 19200 BPS [3] 38400 BPS [4] 56000 BPS [5] 57600 BPS [6] 115200 BPS	0 6	3	
P32.4		[0] None_8_1_CFG [1] Even_8_1_CFG [2] Odd_8_1_CFG [3] None_8_2_CFG [4] Even_8_2_CFG [5] Odd_8_2_CFG	0 5	0	
P32.5	Modbus	Modbus 0 Modbus	0 100 [s]	0 [s]	0s

7.25

P33

P33.0	Profibus	[0] [1]	0 1	0	
P33.1		PLC	1 255	1	
P33.2		[0]PP01 [1]PP02 [2]PP05 [3]GUIDE	0 3	2	
P33.3			0 16	14	
P33.4			0 16	14	
P33.5		[0] [1] [2] [3]	0 3	0	
P33.6			0 1000 [ms]	50 [ms]	
P33.7		[0] [1]	0 1	0	
P33.8			0.0 10.0 [s]	3.0 [s]	
P33.13	[W0]	7-2	0 37	0	
P33.14	[W0]	[0] × 1 [1] × 10 [2] × 100 [3] × 1000 [4] × 10000	0 4	0	
P33.15	[W1]	7-2	0 37	0	
P33.16	[W1]	[0] × 1 [1] × 10 [2] × 100 [3] × 1000 [4] × 10000	0 4	0	
P33.17	[W2]	7-2	0 37	0	

P33.18	[W2]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$	0 4	0	
P33.19	[W3]	7-2	0 37	0	
P33.20	[W3]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$	0 4	0	
P33.21	[W4]	7-2	0 37	1	
P33.22	[W4]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$	0 4	0	
P33.23	[W5]	7-2	0 37	18	
P33.24	[W5]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$	0 4	2	
P33.25	[W6]	7-2	0 37	21	
P33.26	[W6]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$	0 4	1	
P33.27	[W7]	7-2	0 37	22	
P33.28	[W7]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$	0 4	1	
P33.29	[W8]	7-2	0 37	23	
P33.30	[W8]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$	0 4	1	


P33.31	[W9]	7-2	0 37	0	
P33.32	[W9]	[0] × 1 [1] × 10 [2] × 100 [3] × 1000 [4] × 10000	0 4	0	
P33.33	[W10]	7-2	0 37	0	
P33.34	[W10]	[0] × 1 [1] × 10 [2] × 100 [3] × 1000 [4] × 10000	0 4	0	
P33.35	[W11]	7-2	0 37	0	
P33.36	[W11]	[0] × 1 [1] × 10 [2] × 100 [3] × 1000 [4] × 10000	0 4	0	
P33.37	[W12]	7-2	0 37	0	
P33.38	[W12]	[0] × 1 [1] × 10 [2] × 100 [3] × 1000 [4] × 10000	0 4	0	
P33.39	[W13]	7-2	0 37	0	
P33.40	[W13]	[0] × 1 [1] × 10 [2] × 100 [3] × 1000 [4] × 10000	0 4	0	
P33.41	[W14]	7-2	0 37	0	
P33.42	[W14]	[0] × 1 [1] × 10 [2] × 100 [3] × 1000 [4] × 10000	0 4	0	
P33.43	[W15]	7-2	0 37	0	

P33.44	[W15]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$	0 4	0	
P33.45	[W0]	7-3	0 48	0	
P33.46	[W0]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.47	[W1]	7-3	0 48	0	
P33.48	[W1]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.49	[W2]	7-3	0 48	0	
P33.50	[W2]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.51	[W3]	7-3	0 48	0	
P33.52	[W3]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.53	[W4]	7-3	0 48	1	

P33.54	[W4]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.55	[W5]	7-3	0 48	19	
P33.56	[W5]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	2	
P33.57	[W6]	7-3	0 48	26	
P33.58	[W6]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	6	
P33.59	[W7]	7-3	0 48	30	
P33.60	[W7]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	1	
P33.61	[W8]	7-3	0 48	14	

P33.62	[W8]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.63	[W9]	7-3	0 48	13	
P33.64	[W9]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.65	[W10]	7-3	0 48	40	
P33.66	[W10]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	6	
P33.67	[W11]	7-3	0 48	0	
P33.68	[W11]	$[0] \times 1$ $[1] \times 10$ $[2] \times 100$ $[3] \times 1000$ $[4] \times 10000$ $[5] [\%] \times 1$ $[6] [\%] \times 10$ $[7] [\%] \times 100$	0 7	0	
P33.69	[W12]	7-3	0 48	0	

P33.70	[W12]	[0] × 1 [1] × 10 [2] × 100 [3] × 1000 [4] × 10000 [5] [%] × 1 [6] [%] × 10 [7] [%] × 100	0 7	0	
P33.71	[W13]	7-3	0 48	0	
P33.72	[W13]	[0] × 1 [1] × 10 [2] × 100 [3] × 1000 [4] × 10000 [5] [%] × 1 [6] [%] × 10 [7] [%] × 100	0 7	0	
P33.73	[W14]	7-3	0 48	0	
P33.74	[W14]	[0] × 1 [1] × 10 [2] × 100 [3] × 1000 [4] × 10000 [5] [%] × 1 [6] [%] × 10 [7] [%] × 100	0 7	0	
P33.75	[W15]	7-3	0 48	0	
P33.76	[W15]	[0] × 1 [1] × 10 [2] × 100 [3] × 1000 [4] × 10000 [5] [%] × 1 [6] [%] × 10 [7] [%] × 100	0 7	0	



7-3

0	
1	0
2	1
3	2
4	3
5	4
6	5
7	0 @32bit
8	1 @32bit
9	2 @32bit
10	3 @32bit
11	4 @32bit
12	5 @32bit
13	[32]
14	[32]
15	32bit_MSW
16	32bit_LSW
17	
18	
19	
20	[rpm]
21	[rpm]
22	
23	
24	
25	
26	
27	A
28	B

29	C
30	
31	
32	
33	1
34	2
35	
36	
37	
38	
39	
40	
41	Mwh
42	Kwh
43	Mwh
44	Kwh
45 48	AW26 29

8.

8.1

450kW

P2.0

800kW

400kW

8.2

1


P12.0

[0]


[1]

A.

[0]			
[1]	[2]	---	1
[6]	1	0	---
[7]	2	1	---
[8]	3	2	---
[9]	4	3	---

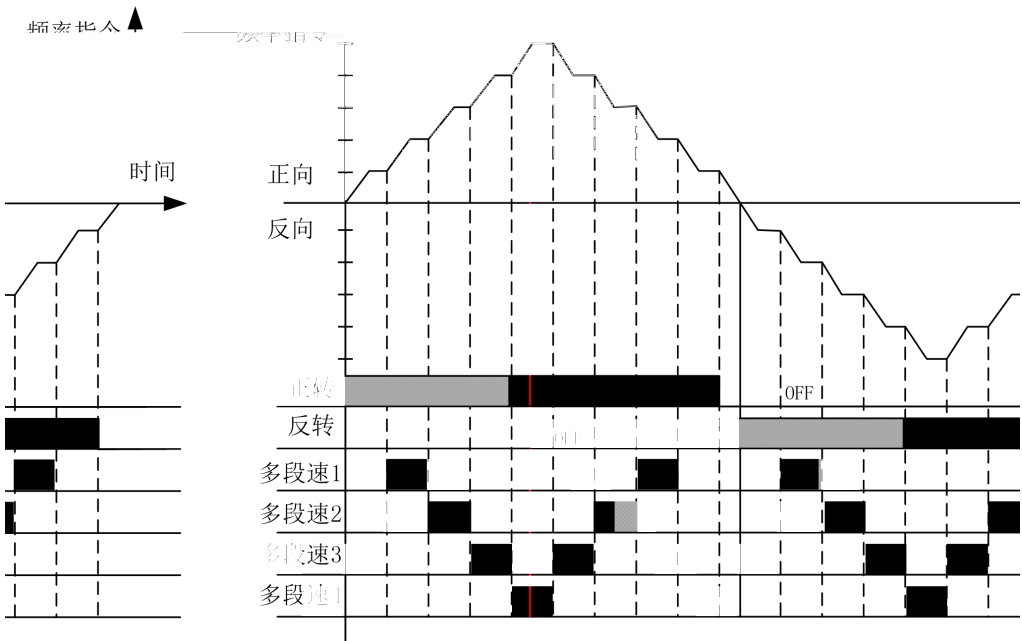

B. [1]
 4 16 (8421)
 (FORWARD) (REVERSE) P12.2(1)

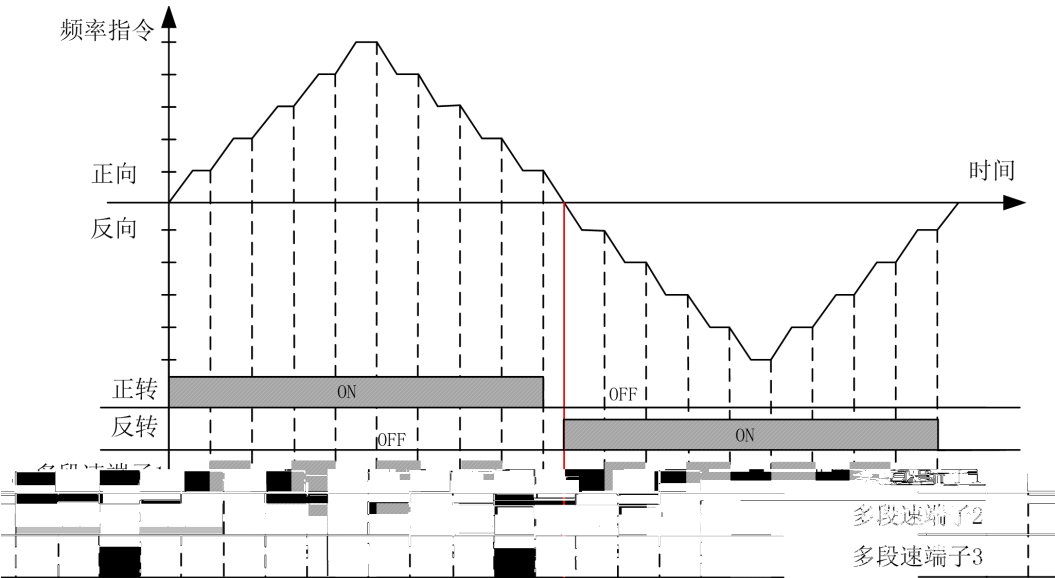


2
 DI 22 “ ”
 10Hz E106 “ 1 ”
 10Hz 2s E107
 “ 2 ”


8.3

/


[1] [3] [3]
 [1] [3]

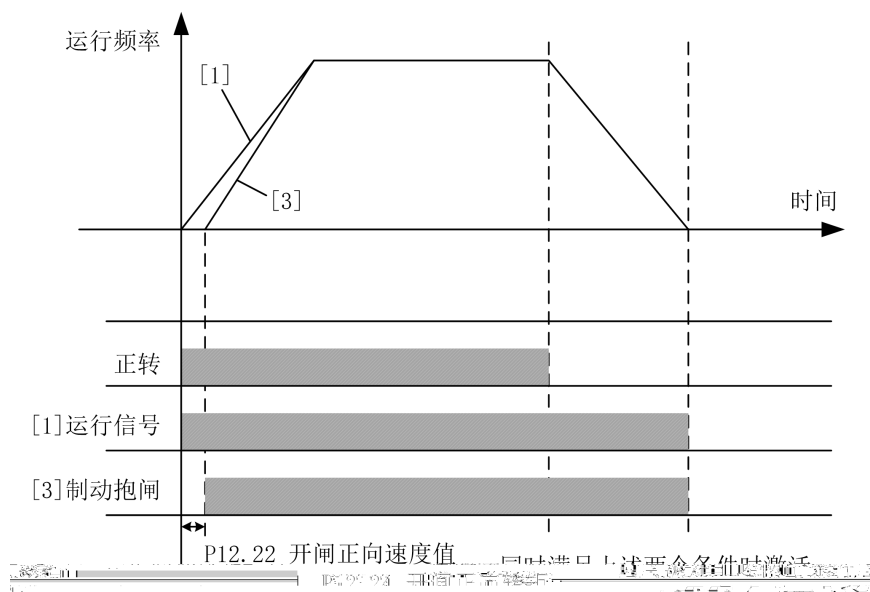

8.4

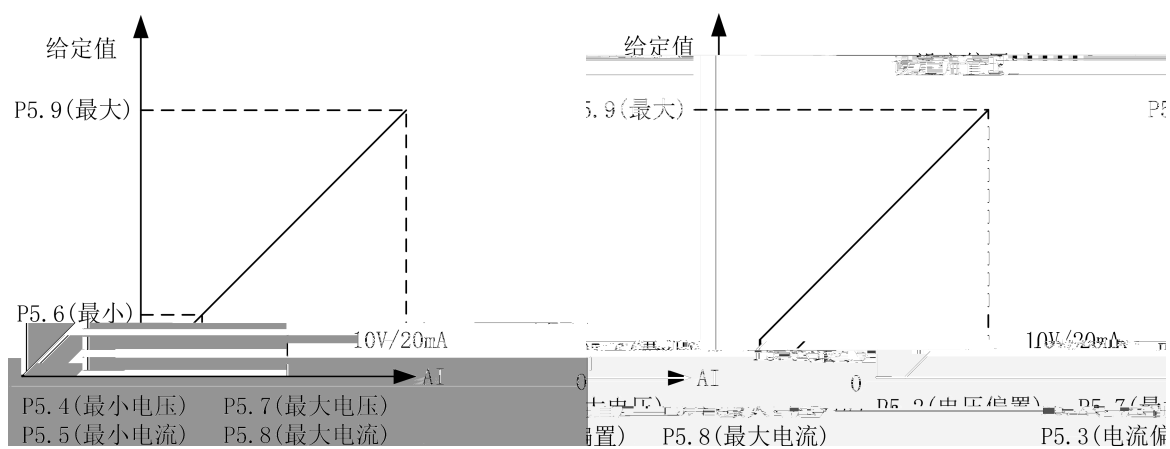

8.5

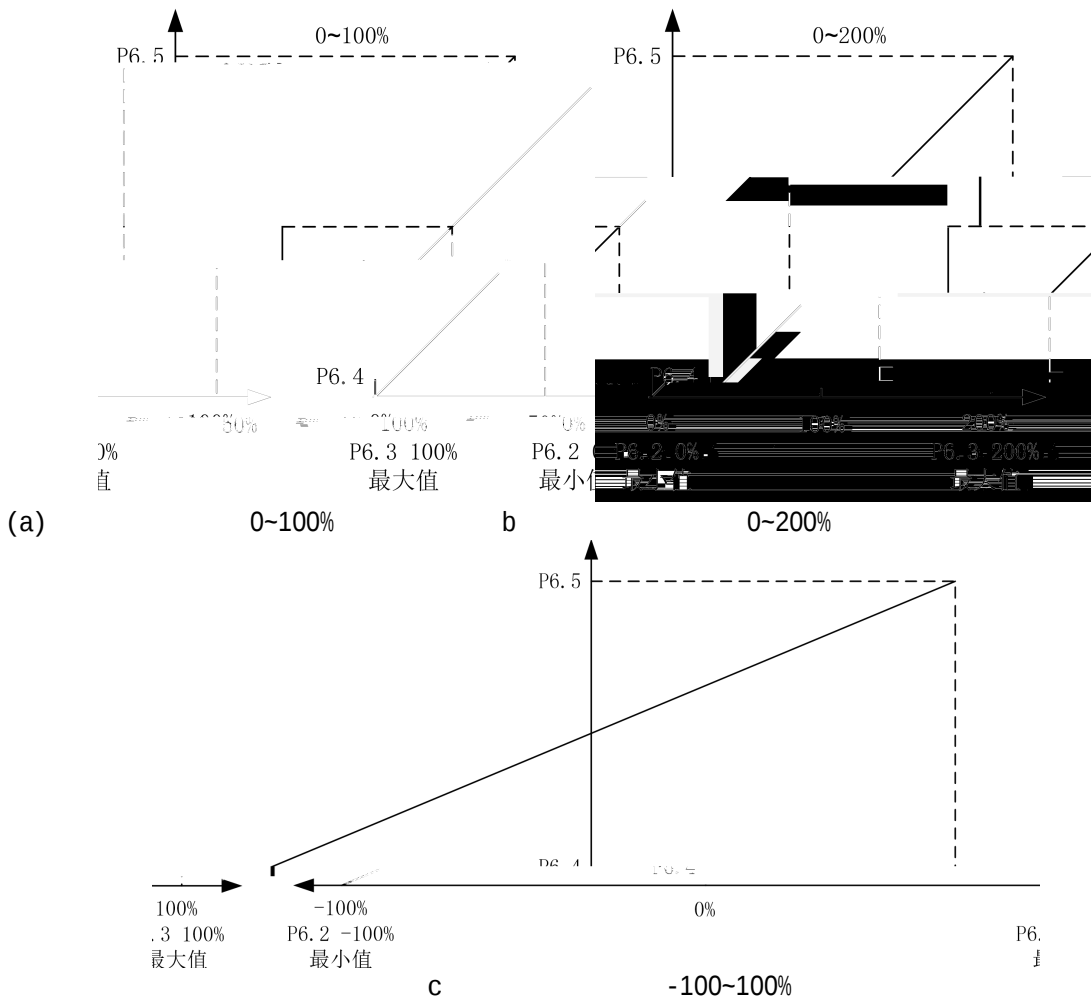

8.6

1

P7.0 P7.1 P7.2 P7.3

2

P7.4 P7.5 P7.6 P7.7

P7.4

P16.4

3

P7.8 P7.9 P7.10 P7.11

$$I_a + I_b + I_c$$

$$P_{16.4} \quad \frac{I_a + I_b + I_c}{> P} \times P \times$$

4

P7.12 P7.13

P7.12

P7.13

5

P7.14

IGBT

P7.14

P7.15

IGBT

P7.15

6

P7.19 P7.20 P7.21 P7.22

P7.19

P7.19 P7.22

7

P7.23

P16.11=1

P7.23

P7.23

P7.24 P7.26

P17.11=1 P18.11=1 P19.11=1

8

P7.31 P7.32

P16.11=2


P7.31

100%

P7.32

P7.33

P7.48 P7.50

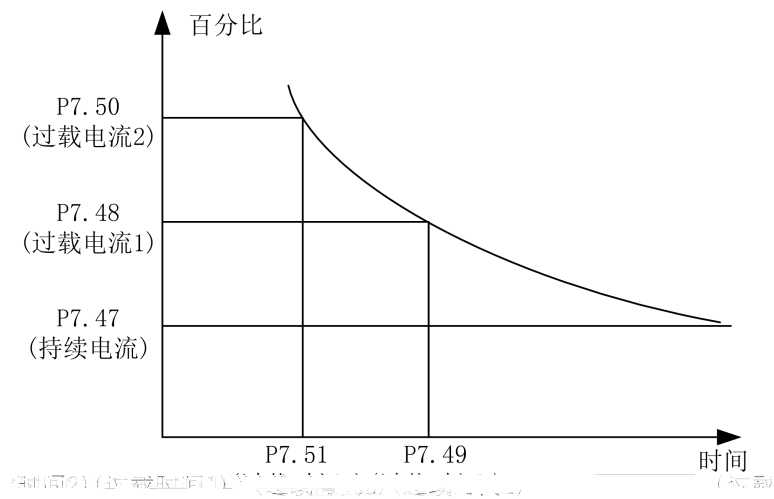

HF620

1

P7.66

647V P7.66

697V

$$= \begin{array}{c} \times \sqrt{} \times \\ \times \sqrt{} \times \end{array} + \begin{array}{c} \times \sqrt{} \times \\ \times \sqrt{} \times \end{array}$$

12

P7.69 P7.70 P7.71

P7.69

0

P16.0


380V

P7.70

100V

711V

$$= \times \sqrt{\times} \times + +$$

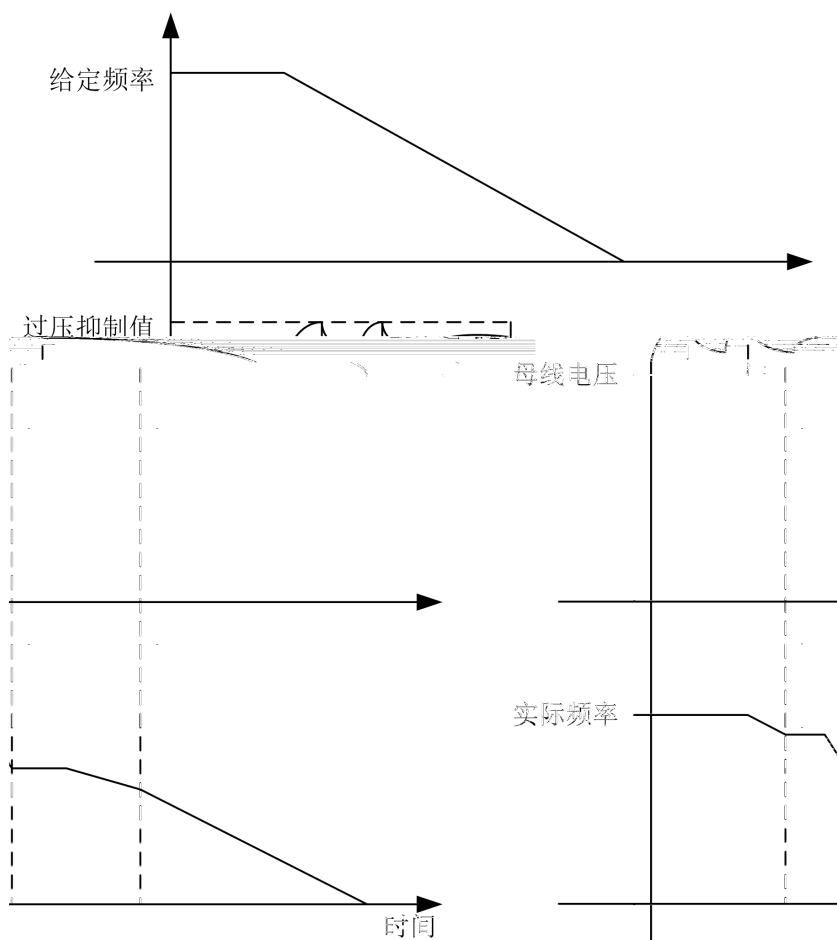

P7.71

P7.71

8.7

1

P8.3


[0]

[1]

P8.6

P8.6

P8.7

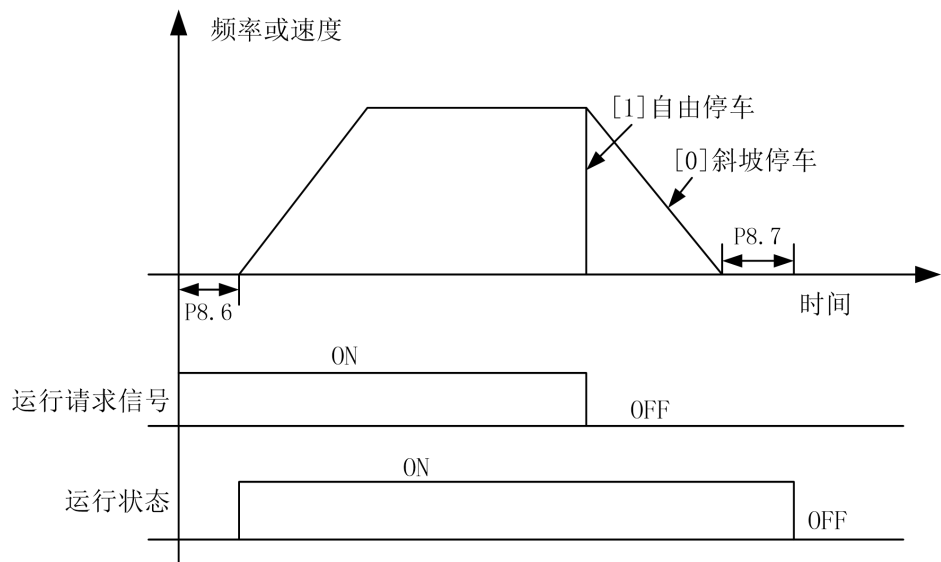


P8.54

0

P8.3

[0]

P8.54

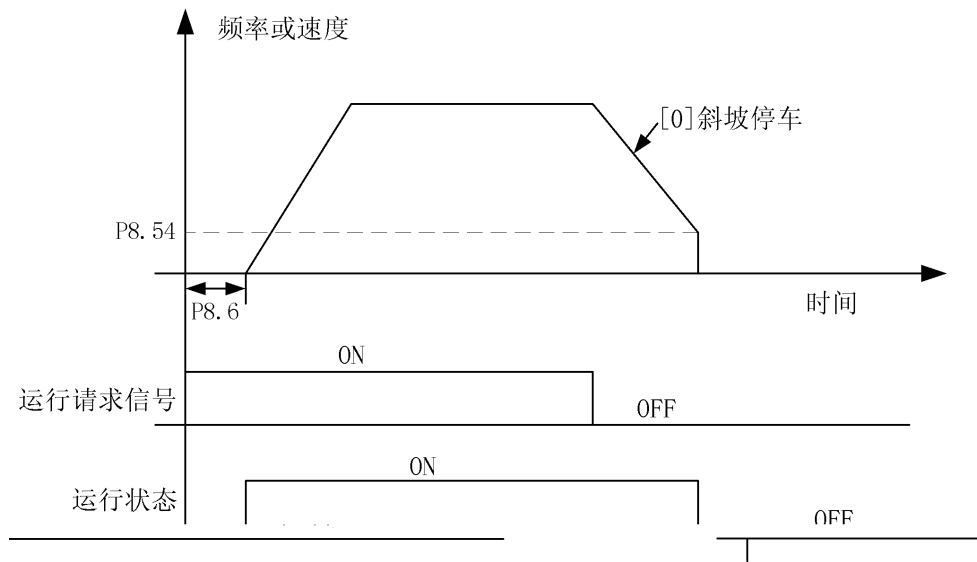


2

P8.14

P8.14

P8.33

P8.33

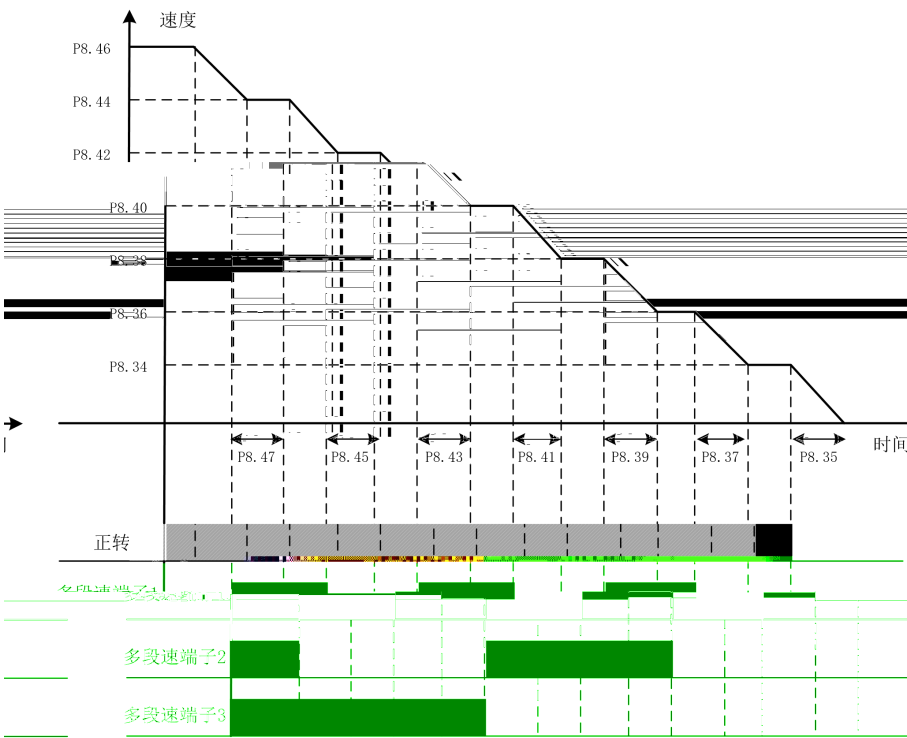

$P8.34 < P8.36 < P8.38 < P8.40 < P8.42 < P8.44 < P8.46$

P8.34	P8.36	P8.38	P8.40	P8.42	P8.44	P8.46
10%	20%	30%	50%	60%	80%	100%

3

PROFIBUS MODBUS

P8.32

$1 \qquad \qquad \qquad = P8.33 \times P8.35 \times (\qquad \qquad \qquad \times 0.001)$

4

$$\begin{matrix} & & & & P8.53 & [0] & P8.55 \\ [1] & & P8.56 & & P8.53 & [1] & P8.55 & [1] \\ & & & & P8.56 & & & \end{matrix}$$

8.8

1

P12.2 P12.17

P12.0=[1]

	1	2	3	4
1	0	0	0	0
2	1	0	0	0
3	0	1	0	0
4	1	1	0	0
5	0	0	1	0
6	1	0	1	0
7	0	1	1	0
8	1	1	1	0
9	0	0	0	1
10	1	0	0	1
11	0	1	0	1
12	1	1	0	1
13	0	0	1	1
14	1	0	1	1
15	0	1	1	1
16	1	1	1	1

0 OFF 1 ON

2

P12.22 P12.37

[3]

P12.22 P12.23

P12.24 P12.25

P12.32[] P12.33[]

P12.28 P12.29

P12.36 P12.37

P16




P4.2	3	16		
P4.3	4	3		
P12.40		10%	100%	P16.6
P12.41		0.1s		

4

P12.43		20%	
P12.44		0.2s	
P12.45		30%	P
			12.43

P12.46		0.1s	
P12.47		10%	
P12.48		3s	P12.47
P12.49		0.2	
P12.50		3%	
P12.38		1	1 0
P4.3	4	3	

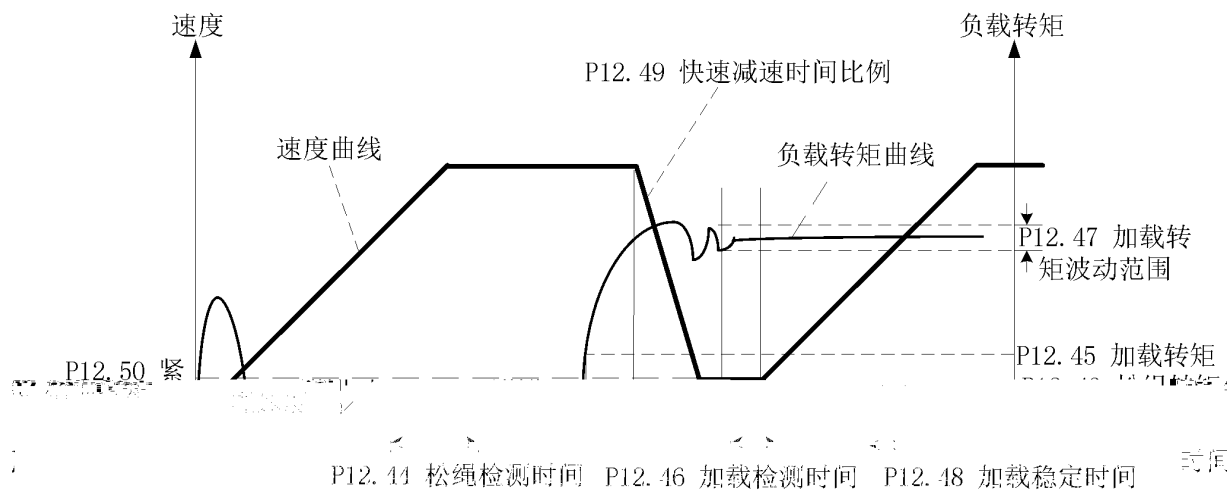

1

8.9 V/F

1

P16.0 P16.9

P16.7

$120 \times P16.5/P16.6$

P16.9

$120 \times P16.5/P16.7$

P16.2

P16.4

2

P16.12

0.5Hz~2Hz

>50Hz

1kHz			
5kHz			
10kHz			

	kHz
0.4kW 37kW	5
45kW 160kW	3
185kW 450kW	2


3
V/F

P16.14
V/F
P16.11=0

[0]
V/F

[1]
V/F
P16.33
P16.45
V/F

[2]

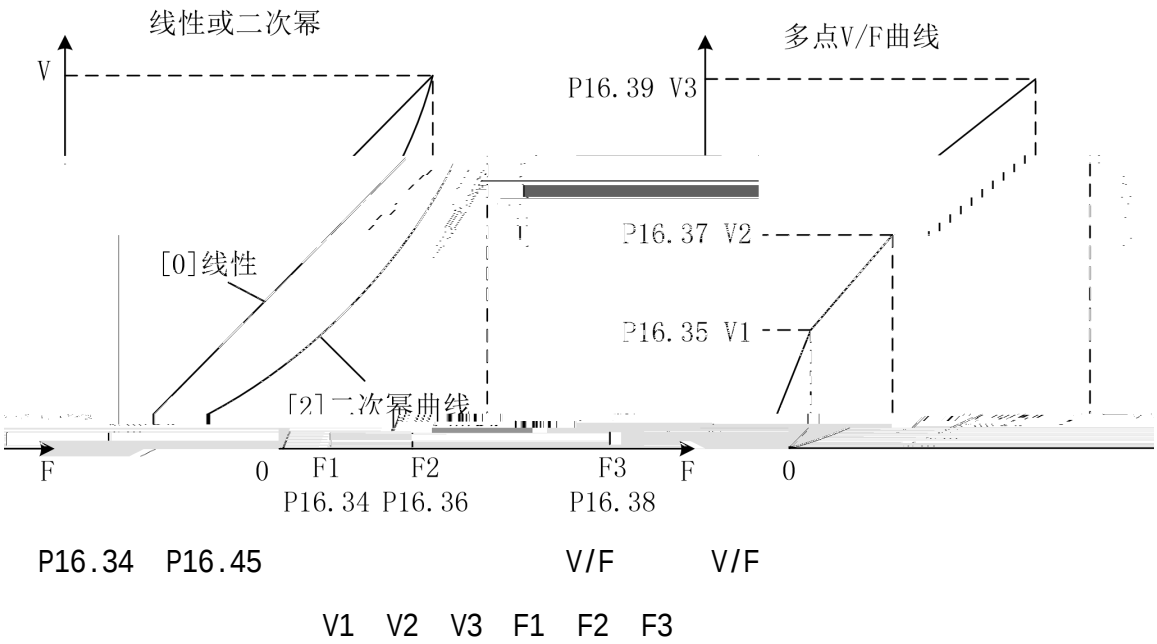

4

P16.15 V/F

V/F

5

P16.14=[0]


V/F

V/F

P16.26

P16.26

P16.27

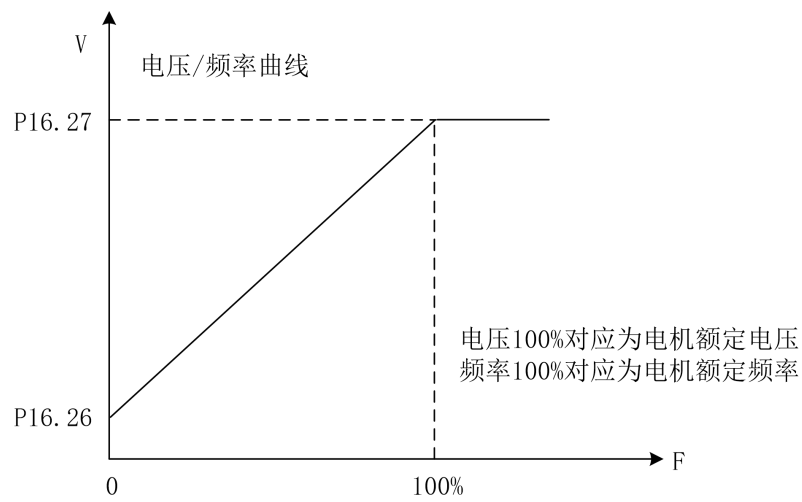


P16.14=[2]

V/F

P16.30 P16.30

P16.27

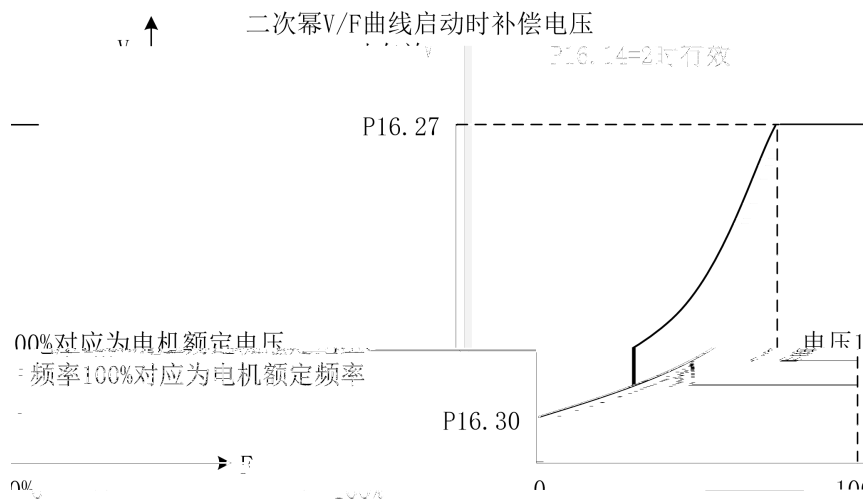


6

P16.50 P16.56

V/F

P16.50 P16.51 P16.52

P16.54 P16.55 P16.56

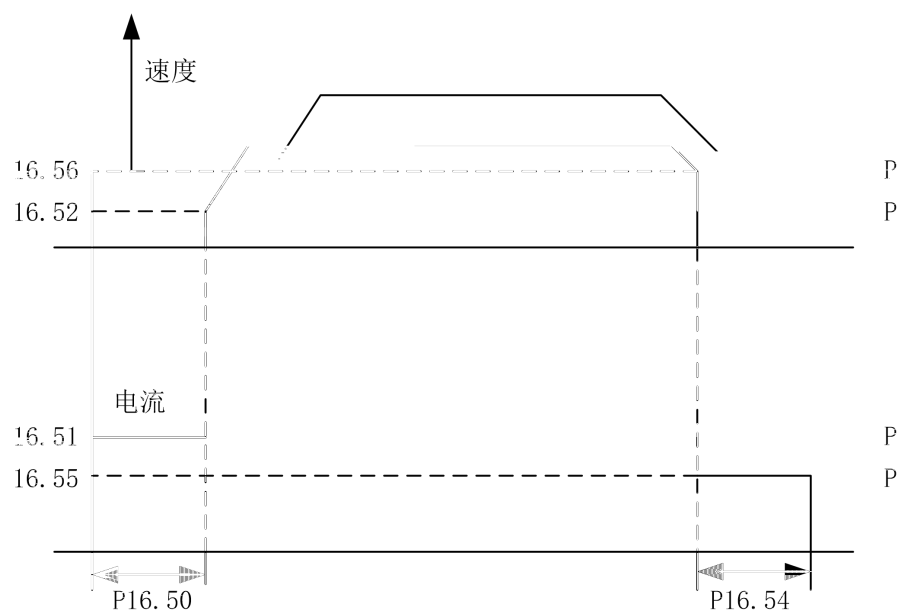

7

P16.64

8.10

1

P20.0

P20.0=0 P20.1=0 P20.2=0

P20.0=0 P20.1 ≠ 0 P20.2 ≠ 0

P20.0=1

P20.26 P20.27 0
 2%
 P20.34 [0] 1
 0 P20.26 P20.27 0
 P20.26 50% 100% P20.27 3% 5%
 P20.34 [1] 2
 200 P20.26 P20.27 0

 HF620 P20.34 [1]
 HF620 P20.34 [0]

 6 DROOP

 DROOP DROOP
 P20.60 0
 DROOP P20.61 DROOP

 7 1

 8 2

 P20.1 P20.2 [0]

9

PGD1


PLC

DI

DP CW0.10 " 1 "


10

P20.36

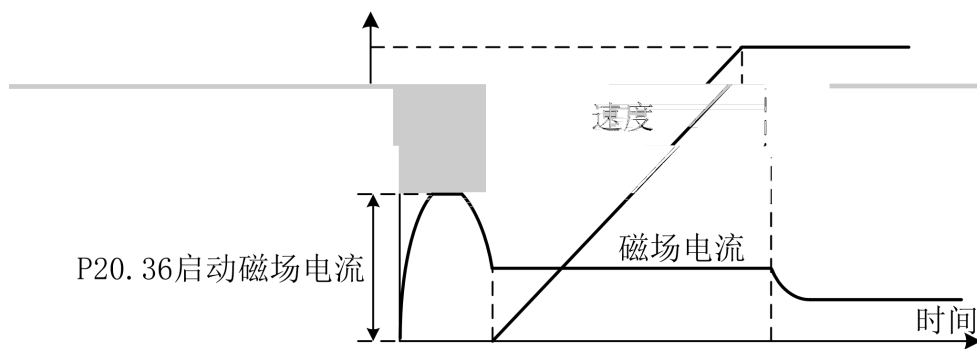

11

P20.37 P20.40

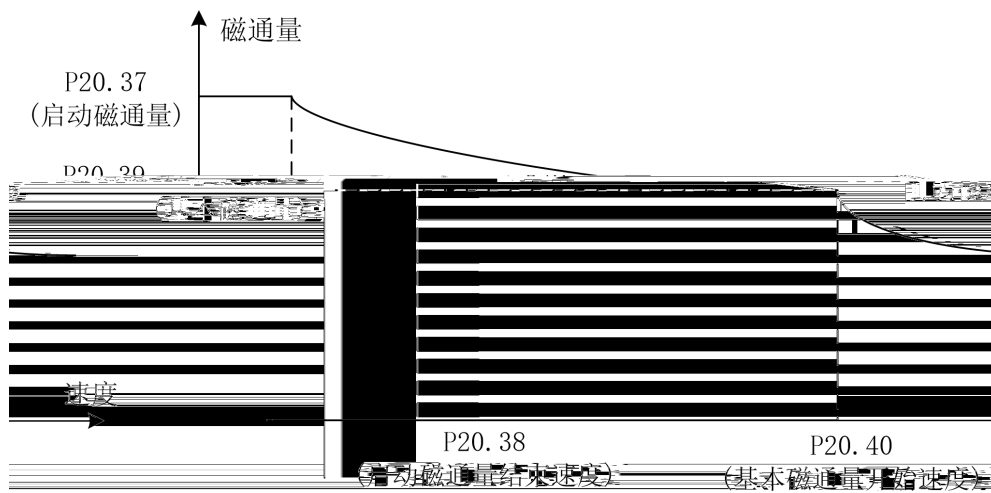


12

P20.55

P20.56


%

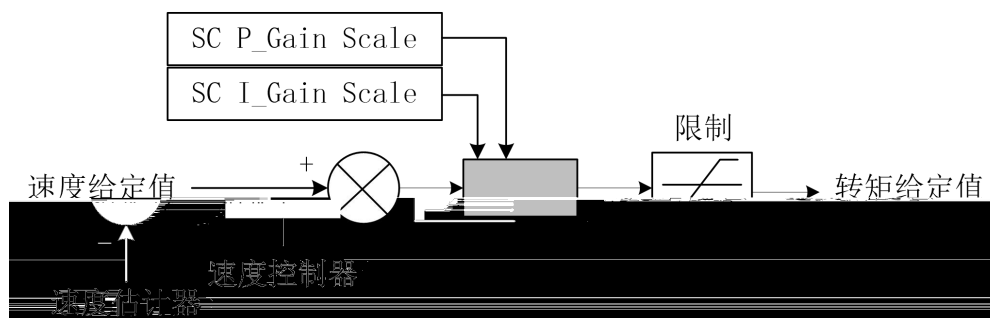

13

P20.62 P20.63

%

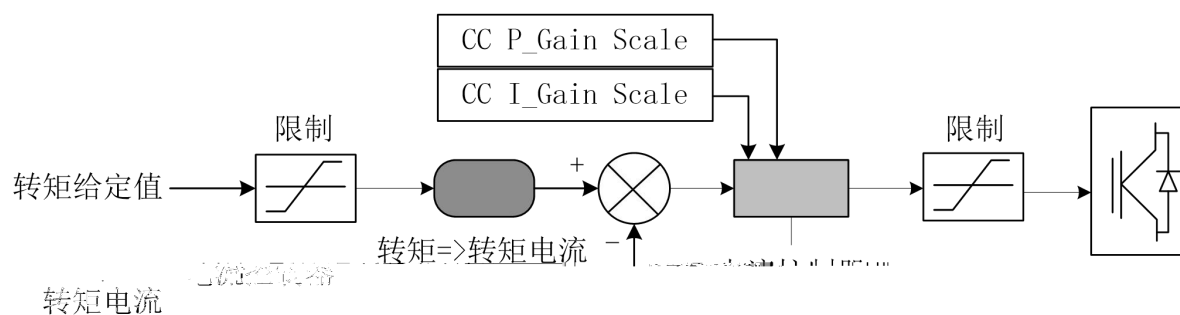

8.11

V/F	P16.64 V/F	(10 40Hz)	100	80 150	
	P16.12				
	P16.15				
	P16.26 V/F		0.75	0.5 1.2	
	P7.0		150	150 220	
	P16.12				
	P7.0		150	150 220	
	P20.43		75	50 100	
	P20.56		100	80 150	


9.

9.1

W01	SYS_NOT_RDY	(Ready)	
W02	NO_DRV_ENABLE	[]	P3
W03	LOCAL_EM	[]	P3
W04	REMOTE_EM	[]	P3
W06	OT	P7.14()	
W09	DP P/BALARM	DP	DP
W10	MODBUS MODBUS ALARM	Modbus	Modbus
W15	PARAMETER ERROR		
W18	Temp_Sensing Fail		
W20	SLV_NOT_RDY		
W21	1 SLV1_CAN_ERR	1	1

9.2

[E051]	U	IGBT ERR_UTnot reset	IGBT IGBT
[E053]	V	IGBT ERR_UTnot reset	IGBT IGBT
[E054]	W	IGBT ERR_UTnot reset	IGBT IGBT
[E056]		ERR_SLAVE_FAULTnot reset	
[E057]		ERR_DBnot reset	IGBT IGBT

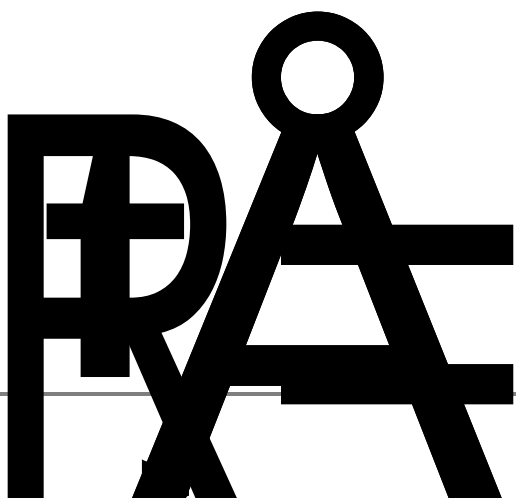

[E111]	OL	P7.49(1) P7.48(1)
[E112]	ZC	P7.48 P7.49
[E113]	MIP	P7.8
[E114]	MOP	
[E115]	OS	P7.19
[E116]	SLVC Fail	P7.19
[E117]	MOTOR STALL	P7.23
[E118]	PG ERROR	P20.14 P20.15
[E119]	SPEED ABNORMAL	P20.14 P20.15
[E120]	IGBT OT	P7.31 P7.32
[E138]	TEMP_SENSINGFAIL	
[E139]	Pre_Charging Fail	
[E140]	LineUV	P7.95
[E141]	Line OPEN	
[E142]	LineDetectionError	

[E143]	LineSWFail	DI
[E144]	LineSW SHORT	
[E145]	(AFE) Line OV	P16.0
[E146]	(AFE) Line Over_Freq	
[E152]	U IGBT PDP[U]	IGBT IGBT
[E154]	V IGBT PDP[V]	IGBT IGBT
[E155]	W IGBT PDP[W]	IGBT IGBT
[E156]	Hardware OC	
[E157]	PDP[DB]	
[E160]	SLAVE FAULT	
[E161]	SLV_NOT_RDY	
[E162]	1 CAN SLV1_CAN_ERR	1
[E167]	CAN CAN_ERR	
[E170]	MOTOR TUNING FAIL	P7.33
[E180]	DP P/B ERROR	
[E181]	DP P/B_EM	CW0.4
[E200]	LOCAL_EM	[] P3

[E201]	REMOTE_EM	[] P3
[E202]	Modbus MODBUS EMERGENCY	Modbus CWO.4
[E203]	DRIVE DISABLED	DP
[E204]	DI ERR DUPLICATE DI SET	DI
[E210]	Panel Error	
[E220]	CRC MEMORY CRC ERR	
[E221]	PARAMETER ERROR	

9.3

•		•	
•	ON	•	ON
•	COM	•	COM
•		•	
•		•	
•		•	
•		•	§
•		•	
•		•	
•		•	
•		•	
•		•	
•		•	

SON •

10.

	
1.	
2.	
3.	
4.	

	
1.	CMOS
2.	
3.	

10.1

10.2

	1. 2.	1. > 40 < 95% 2.
	1. 2.	1. 2.
	1. 2. 3.	1. 2. 3.
	1. 2.	1. 2.
	1. 2.	1. 2.

10.3

	2	1 2
PCB		

10.4

	5	
	5	
		(400-0077-570)
1	40	
2	80%	
3	24	/

10.5

1		
2		
		5

- 1
- 2
- 3