

港迪MPOC系列PLC



Wuhan Guide Technology Co., Ltd.

027-87920068
027-87927299
www.gdetec.com

400-0077-570



2025.07



ABOUT US

301633

100 100 10







MPOC

PLC

MPOC

PLC

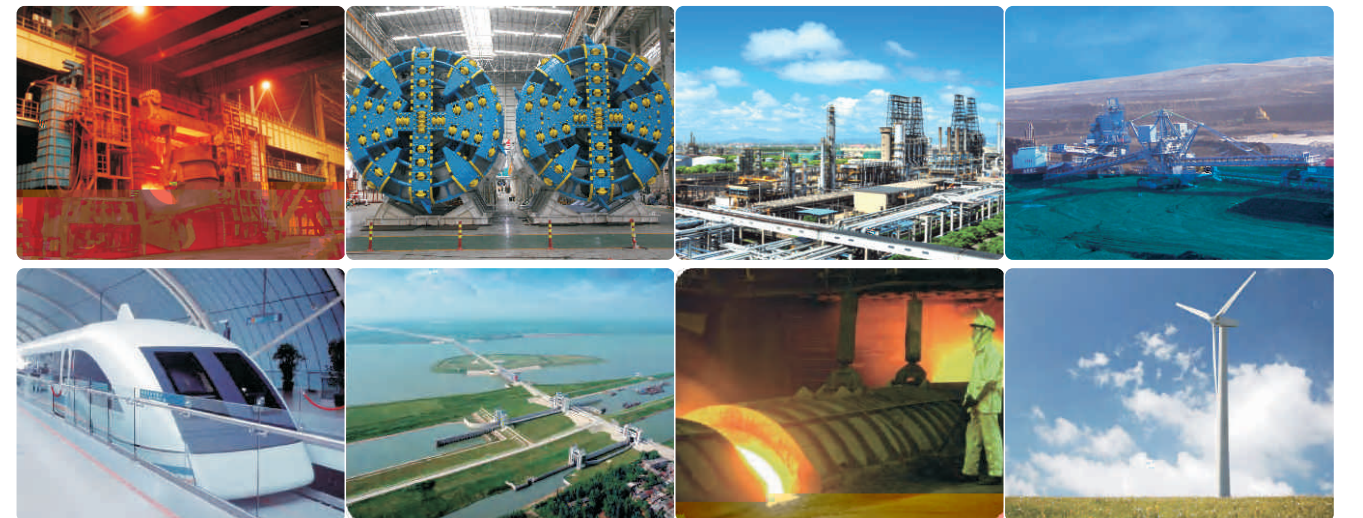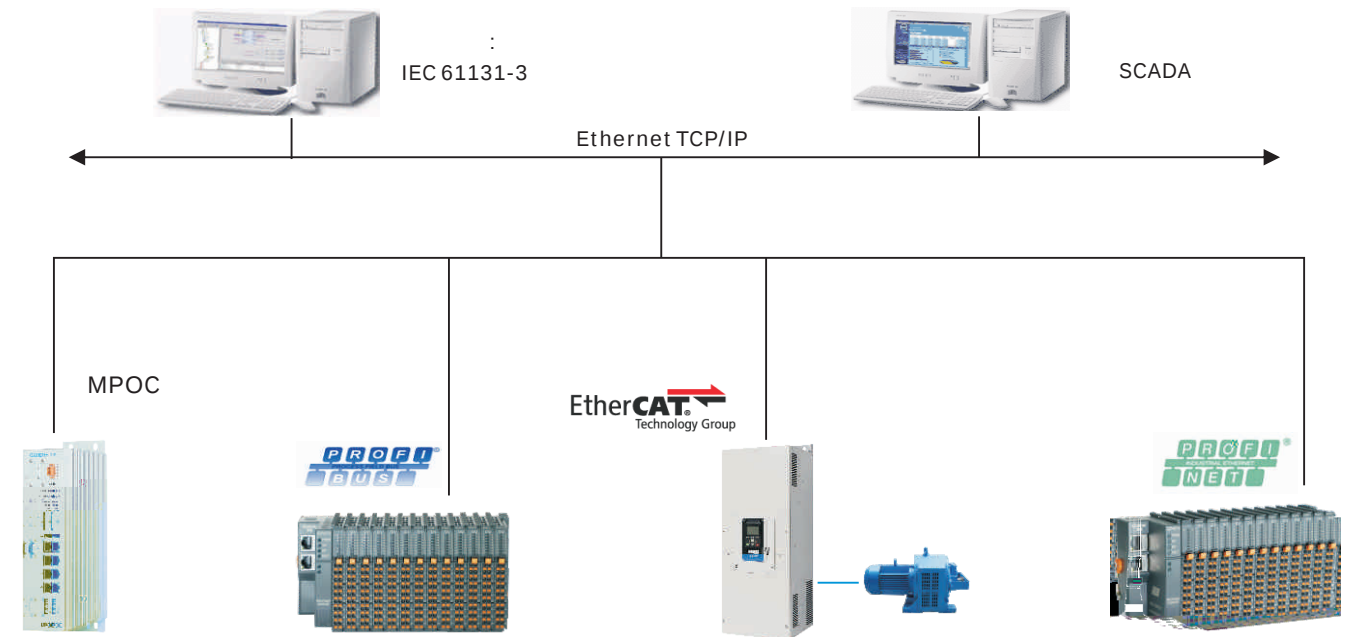

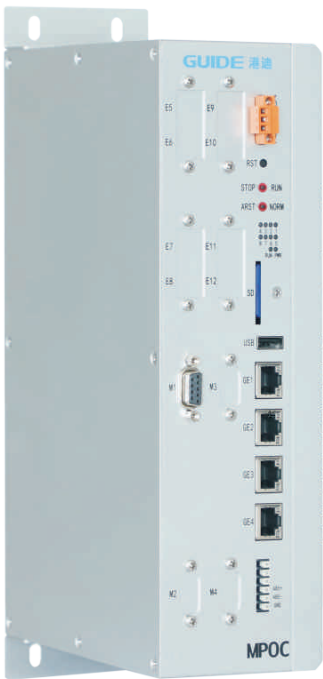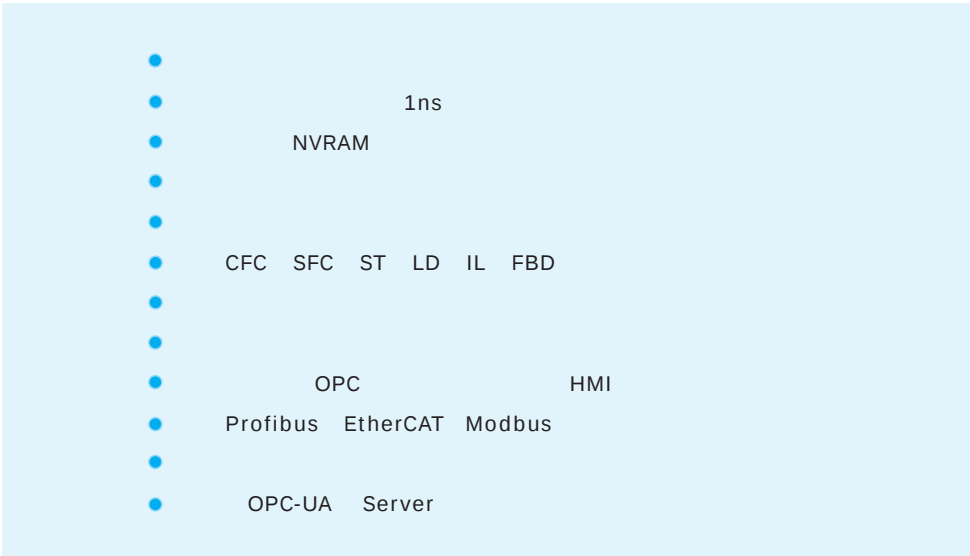

MPOC PLC

		5cm	5cm
		-5 ~55	0.5 /min
		5%~95%	
		700W/m ²	70~106kPa
		2	
		2	
		3000	
		5.8m/s ²	0.6g
		-30 ~60	1 /min
		5%~95%	
		6	
		-30 ~60	
		40	95%
		9~200Hz	15m/s 0.6g ²

CPU

	MPOC21-B204A0-00	4	DP	
	MPOC21-B204D1-00	4	1	DP
	MPOC21-B206A0-00	4	1	DP
	MPOC21-B206D1-00	4	1	1 DP
	CPU	1.2GHz	32KB	L1
	512MB DDR2			
	1ns			
	1GB			
NVRAM	512KB			
	IEC61131-3 (CFC SFC ST LD IL FBD)			
	EtherCAT,Profibus,Profinet,EthernetIP,Modbus,OPCUA			
	× 4			
	× 2			
	USB × 1			
	SD × 1			
	ProfiBus-DP	/	× 4 Profinet	/ × 8
	× 1			
	× 1			
	24Vdc ± 10%			
	24W			
IP	IP20			
	249.8 mm ()x174 mm ()x81.5 mm ()			

MPOC

ProfiNet

		ProfiNet
		ProfiNet cifX Mini PCI Express PC - (AIFX-RE)
		Mini PCI Express ProfiNet
		Mini PCI Express
		ProfiNet
		10BASE T/100BASE-TX
		AIFX-RE X4 (JST BM20B-SRDS-G-TFC 1.0 mm)
		0 °C ...+55 °C (0.5 m/s)
		0 °C ...+70
		10%...95%
		UL 2
		xIn3Plat-Control

ProfiBus

		PROFIBUS DP
		Mini PCI Express PROFIBUS DP PROFIBUS MPI PC - PROFIBUS (AIFX-DP)
		Mini PCI Express PROFIBUS
		Mini PCI Express
		PROFIBUS
		RS-485
		PROFIBUS AIFX-DP X3 (JST 10FMN-BMT-A-TF(LF)(SN) 1.0 mm)
		0 °C ...+55 °C (0.5 m/s)
		0 °C ...+70
		10%...95%
		UL 2
		xIn3Plat-Control

EtherCAT

2 RJ45 100Mbit/s

EtherCAT
XML
32 GD11 512DI/512DO 128AI/128AO

	GD11-C2ECT13
	2 RJ45 24VDC
	RJ45
/	24VDC 10A
	≥ 10mA
+5VDC	2A 16 GD11-PS1AA13
	EtherCAT
	255
IO	
	+24V BF SF NET
	-20~60 , 5%~90%(
(× ×)	50 × 82 × 102 mm

Pofinet-RT

2RJ45100Mbit/s

Profinet-RT/IRTXML512DI/512DO128AI/128AO32GD11

	GD11-C2PNT13			
	2	RJ45	24VDC	
	RJ45			
/	24VDC		10A	
	≥10mA			
+5VDC	2A	16	GD11-PS1AA13	
	Profinet-RT			
IP				
	255			
IO				
	+24V	BF	SF	NET
	-20~60℃，5%~90%(			
(100 × 80 × 120)	50 × 82 × 102 mm			

Profibus-DP

1DB99.6K~12Mbps

Profibus-DP512DI/512DO128AI/128AO32GD11

	GD11-C2DPT13			
	1	DB9	24VDC	
	DB9			
/	24VDC		10A	
	32mA@24V			
+5VDC	2A	16	GD11-PS1AA13	
	Profibus-DP			
IO				
IO	32			
	127			
	+24V	BF	SF	NET
	-20~60℃，5%~90%(			
(100 × 80 × 120)	50 × 82 × 102 mm			



GD11-DI
32

200us

V

24V

mA

500m

24VDC

5VDC 1mA

15VDC 2.5mA

2~3ms(8) 4

7 2~3ms(8) 4

/

1mA

500VDC

GD11-DI 32

GD11-AI wellbus 4/8
32 4 16³²8

XM

&

of

 $\wedge^2$

-ΑΙ04U23Ε

47 mA

0~5V 0~5V

$\pm 10V$ $\pm 5V$

V ₁ 2	2 0 0
------------------	-------

0~32000

```
GD11-AI      wellbus
32  4
```

$$\begin{array}{c} 4/8 \\ 16^{32}_8 \end{array}$$

ř

1

1.

⊢ ⊢

Í

11

NR

1.

S

S

R

1

U

V2

144 U

14481

V2

1448

2

14481


32

	GD11-AT4RD23
	4 RTD
	4
5VDC	60mA
	30VDC
	Pt-100Ω,200Ω,500Ω,1000Ω(α=3850PPM,3920PPM,3850.55PPM,3916PPM,3902PM) ;Pt-10000Ω(α=3850PPM) ; Cu-9.035Ω(α=4720PPM); Ni-10Ω,120Ω,1000Ω(α=6720PPM,6178PPM) ;R-150Ω,300Ω,600 Ω
	Sigma -Delta
	-27648~+27648
	0.1 /0.1
	--
	15 +
	400ms
	125dB AC120V
	100m
	100Ω
	≥ 1MΩ
	≤ 0.1%FS
	0.05%FS
	--
•	
•	
•	
	LED
	-20~60 , 5%~90%(
(× ×)	12 × 82 × 100(mm)

13

XML

	GD11-PS1AA13	GD11-PS1AD13	
	24VDC (± 20%)		
	5V ± 5%	24VDC ± 20% ()	24VDC ± 20% ()
	2A	10A	10A
× ×	12 × 82 × 100(mm)		
	-20~60 , 5%~90%(		
	-25~+85		
	95%		
	IP20		
	1		

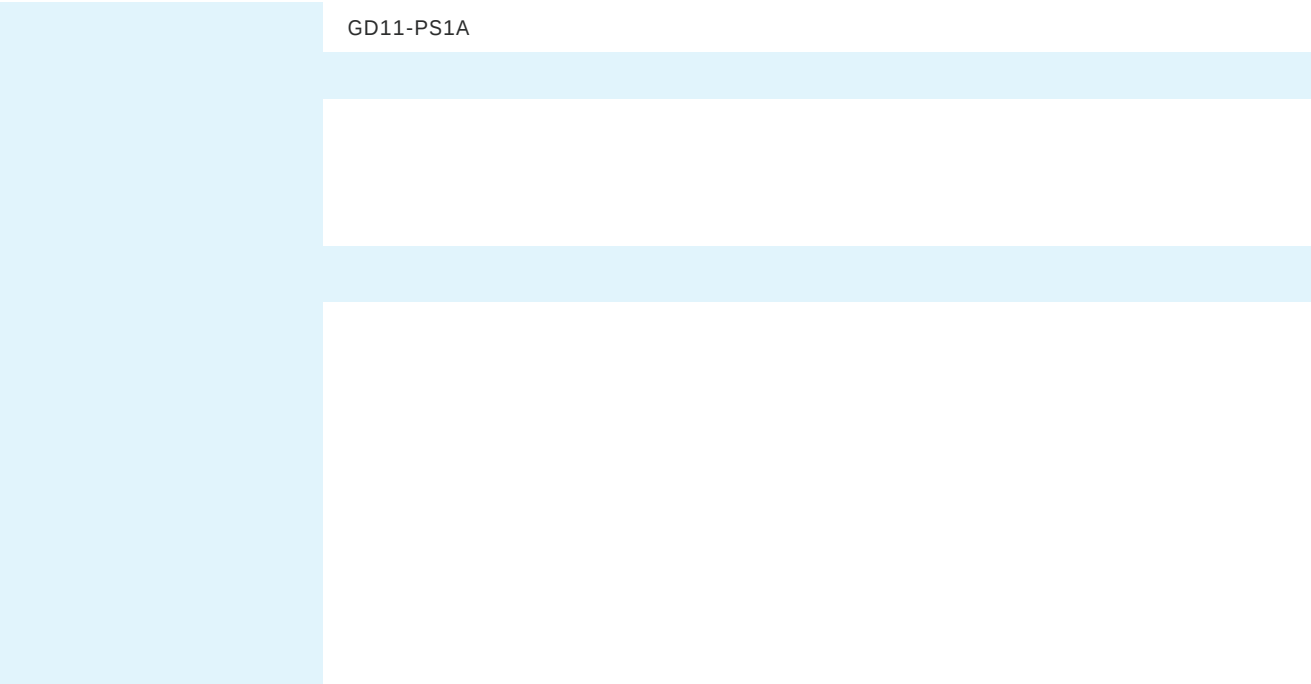

MPOC

1	MPOC21-B204A0-00	MPOC 2.0CPU	MPOC 2.0	4			
2	MPOC21-B206A0-00	MPOC 2.0CPU	MPOC 2.0 DP	4	1		
3	MPOC21-B204D1-00	MPOC 2.0CPU	MPOC 2.0 1 DP	4			
4	MPOC21-B206D1-00	MPOC 2.0CPU	MPOC 2.0 1	4	DP		
5	MPOC_D210	MPOC	MP-D210 miniPCIE Vxworks	Intel i210-AT			
6	MPOC_CIFX 90E-DPM\F	MPOC CIFX DP	MPOC CIFX DP				
7	GD11-C2ECT13	GD11	GD11 32	, EtherCAT 24VDC	2 8	RJ45	WellIBUS ID

[illegible]4